

T-1 3/4 (5mm) multiple

PART NO.	COLOR	VF	mcd	mA	in. (mm)
MV60538.MP8A	RED	1.7	2.0	20	0.140 (3.56)
MV63538.MP8A	YLW	2.1	18.0	20	0.140 (3.56)
MV64538.MP8A	GRN	2.2	26.0	20	0.140 (3.56)
MV67538.MP8A	BLU	2.1	14.0	20	0.140 (3.56)
MV60539.MP8A	RED	1.7	3.2	20	0.195 (4.95)
MV63539.MP8A	YLW	2.1	20.0	20	0.195 (4.95)
MV64539.MP8A	GRN	2.2	28.0	20	0.195 (4.95)
MV67539.MP8A	BLU	2.1	15.0	20	0.195 (4.95)

LOW CURRENT (2mA)

HLMP47009.MP8A	BLK	1.8	2.0	2	0.195 (4.95)
HLMP47199.MP8A	YLW	1.9	2.0	2	0.195 (4.95)
HLMP47409.MP8A	GRN	1.9	3.0	2	0.195 (4.95)

ULTRA BRIGHT

MV33509.MP8A	YLW*	2.2	150.0	20	0.195 (4.95)
MV34509.MP8A	GRN*	2.2	150.0	20	0.195 (4.95)
MV37509.MP8A		2.2	150.0	20	0.195 (4.95)

INTEGRAL RESISTOR

MR30509.MP8A		5.0	2.0	13	0.195 (4.95)
MR30519.MP8A		12.0	2.0	13	0.195 (4.95)
MR33509.MP8A	YLW	5.0	4.0	10	0.195 (4.95)
MR33519.MP8A	YLW	12.0	4.0	13	0.195 (4.95)
MR34509.MP8A	GRN	5.0	4.0	12	0.195 (4.95)
MR34519.MP8A	GRN	12.0	4.0	13	0.195 (4.95)
MR37509.MP8A		5.0	4.0	10	0.195 (4.95)
MR37519.MP8A		12.0	4.0	13	0.195 (4.95)

BICOLOR

MV54919.MP8A	G	2.3	6.0	20	0.195 (4.95)
--------------	---	-----	-----	----	--------------

NOTES 1 Multiples of four is our standard configuration.

Options To obtain units in multiples of two add a "2" suffix to the part number i.e. MV64539 MP8A2 To obtain units in multiples of three add a "3" suffix

2 Custom color combinations are available

*Clear lens


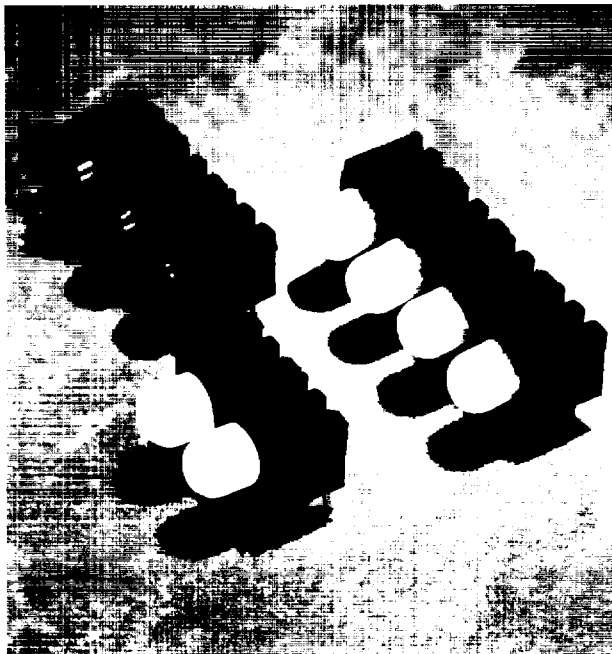


Figure 8A

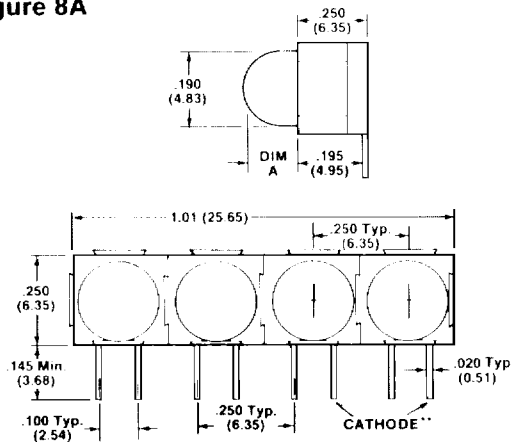

**THE CATHODE, AS INDICATED, IS THE RED CATHODE FOR THE RED/GREEN BICOLOR LED

DECIMALS : .015 (0.38)

1924 年 5 月 20 日 星期日