


- For infra-red reflow and vapor phase soldering
- Gull wing terminals for maximum strength and easy in-circuit test.
- Hi-Rel, 4-finger #30 clip rated at 3 amps. See page 208 for details.
- Uses M-M #1005 pin. See page 135 for details.

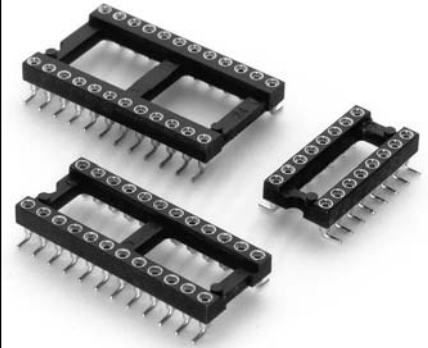

Total number of pins				Quantity per tube	Ordering Information
	A	B	C		
10	0.5	0.2	0.3	40	110-93-210-41-105
4	0.2	0.3	0.4	102	110-93-304-41-105
6	0.3	0.3	0.4	67	110-93-306-41-105
8	0.4	0.3	0.4	50	110-93-308-41-105
10	0.5	0.3	0.4	40	110-93-310-41-105
14	0.7	0.3	0.4	28	110-93-314-41-105
16	0.8	0.3	0.4	25	110-93-316-41-105
18	0.9	0.3	0.4	22	110-93-318-41-105
20	1.0	0.3	0.4	20	110-93-320-41-105
22	1.1	0.3	0.4	18	110-93-322-41-105
24	1.2	0.3	0.4	16	110-93-324-41-105
28	1.4	0.3	0.4	14	110-93-328-41-105
20	1.0	0.4	0.5	20	110-93-420-41-105
22	1.1	0.4	0.5	18	110-93-422-41-105
24	1.2	0.4	0.5	16	110-93-424-41-105
28	1.4	0.4	0.5	14	110-93-428-41-105
32	1.6	0.4	0.5	12	110-93-432-41-105
24	1.2	0.6	0.7	32	110-93-624-41-105
28	1.4	0.6	0.7	28	110-93-628-41-105
32	1.6	0.6	0.7	24	110-93-632-41-105
36	1.8	0.6	0.7	22	110-93-636-41-105
40	2.0	0.6	0.7	20	110-93-640-41-105
42	2.1	0.6	0.7	18	110-93-642-41-105
48	2.4	0.6	0.7	16	110-93-648-41-105
50	2.5	0.6	0.7	16	110-93-650-41-105
52	2.6	0.6	0.7	14	110-93-652-41-105
50	2.5	0.9	1.0	16	110-93-950-41-105
52	2.6	0.9	1.0	14	110-93-952-41-105
64	3.2	0.9	1.0	12	110-93-964-41-105
PLATING CODE =					93
Sleeve (Pin)					200μ" Sn/Pb
Contact (Clip)					30μ" Au