

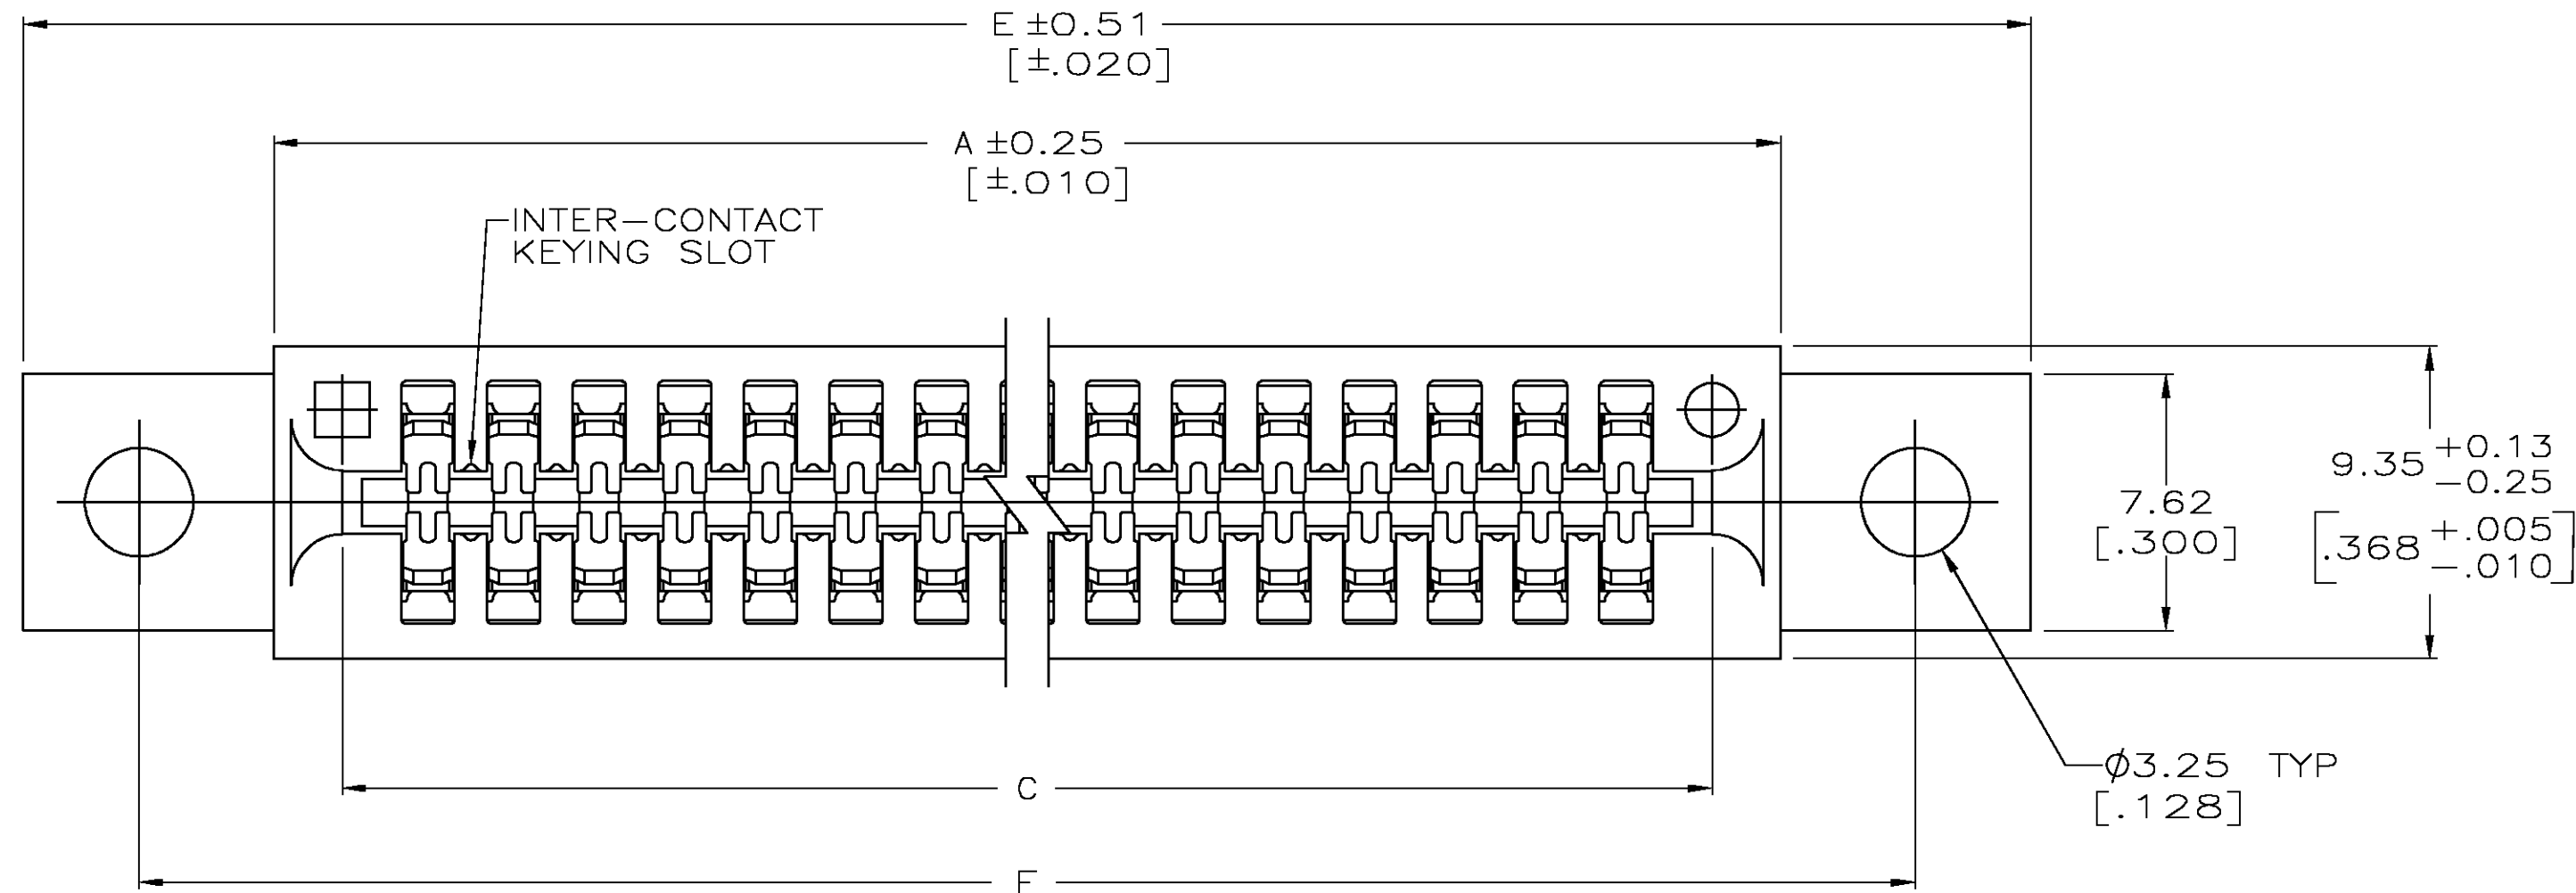


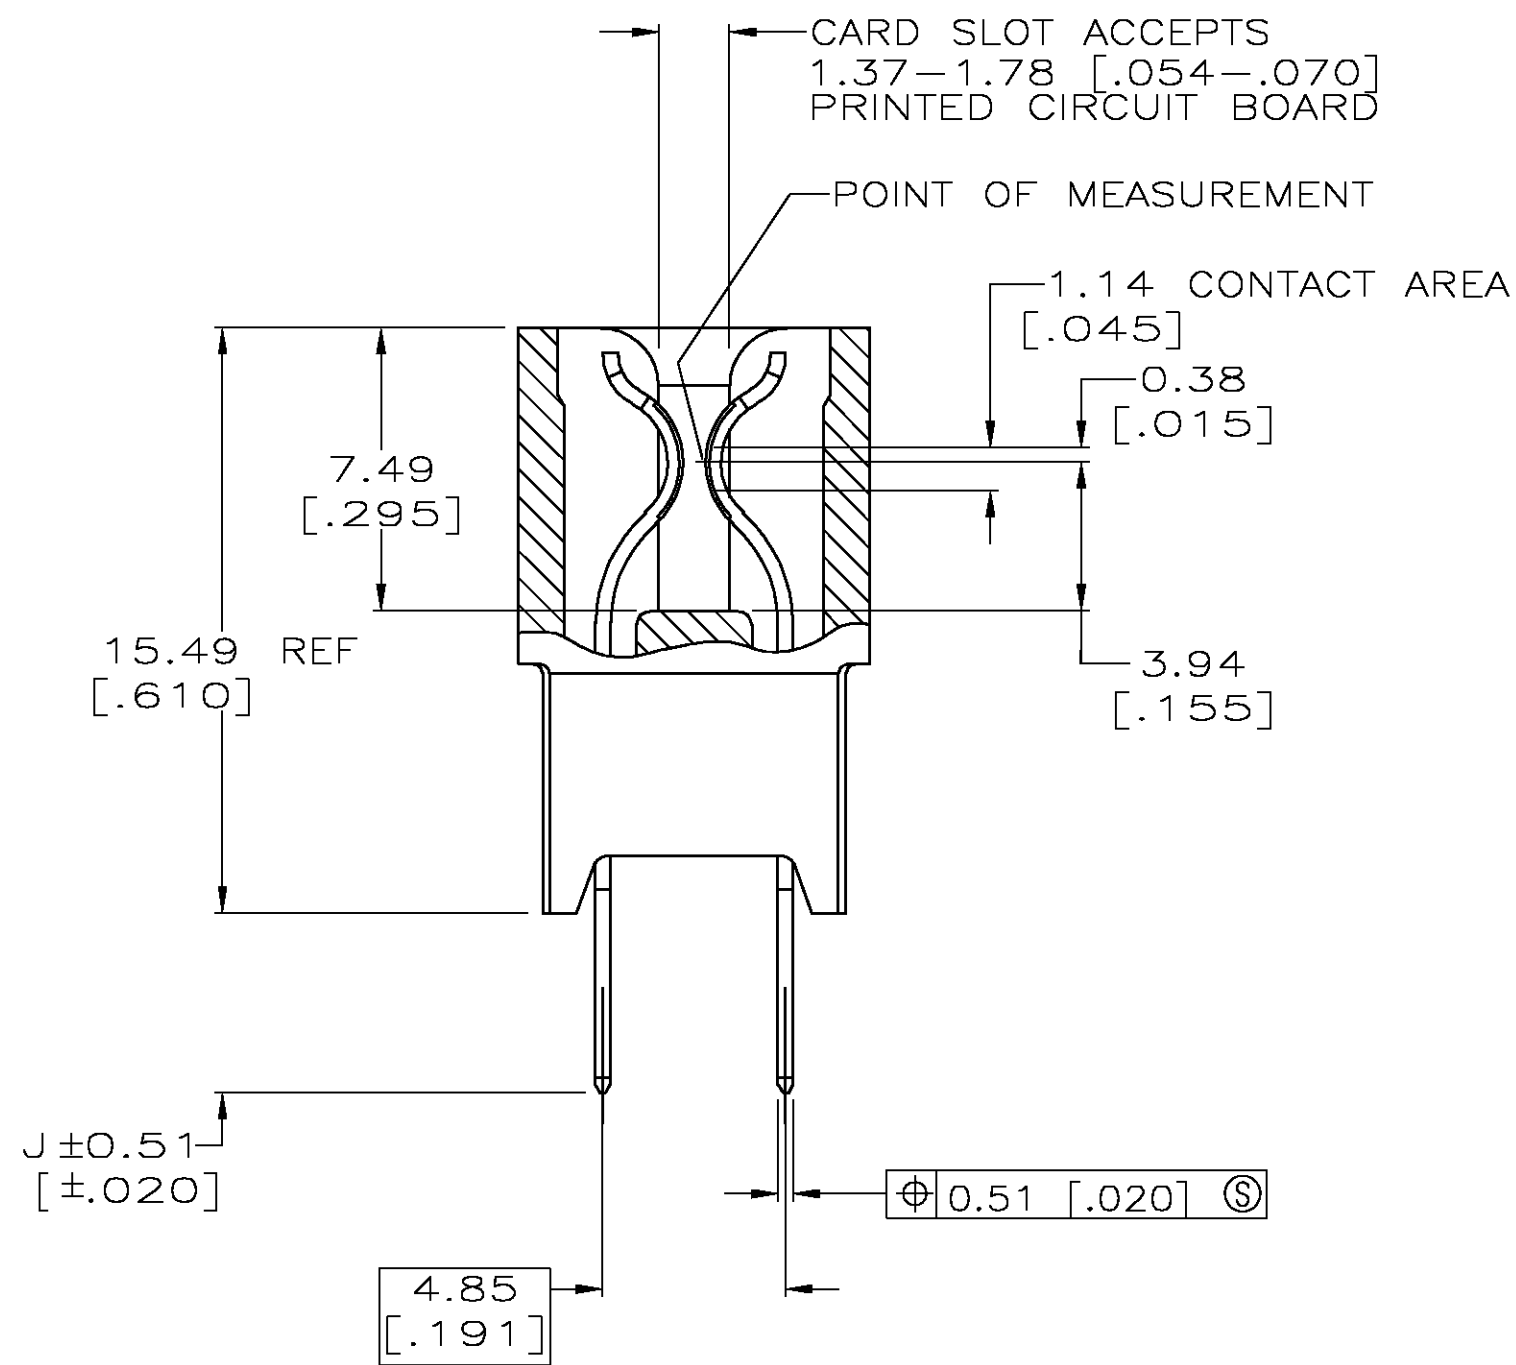

- 1 HOUSING: GLASS FILLED POLYESTER; COLOR: BLACK.
2 CONTACT: PHOSPHOR BRONZE.
3 NICKEL UNDERPLATE: 0.00127 [.000050] MIN — ALL OVER.
4 TIN-LEAD PLATE: 0.00254 [.000100] MIN — SOLDER POSTS.
5 GOLD PLATE: 0.00038 [.000015] MIN — CONTACT AREA.
6 GOLD PLATE: 0.00076 [.000030] MIN — CONTACT AREA.
7 NICKEL PLATE PER MIL-C-45204.
8 AMP PART NUMBER, DATE CODE AND CSA LOGO ARE MARKED IN APPROXIMATE AREA SHOWN, EITHER SIDE.
9. RECOMMENDED PCB FINISHED HOLE DIA: 1.02 $\pm$ 0.08 [.040 $\pm$.003].

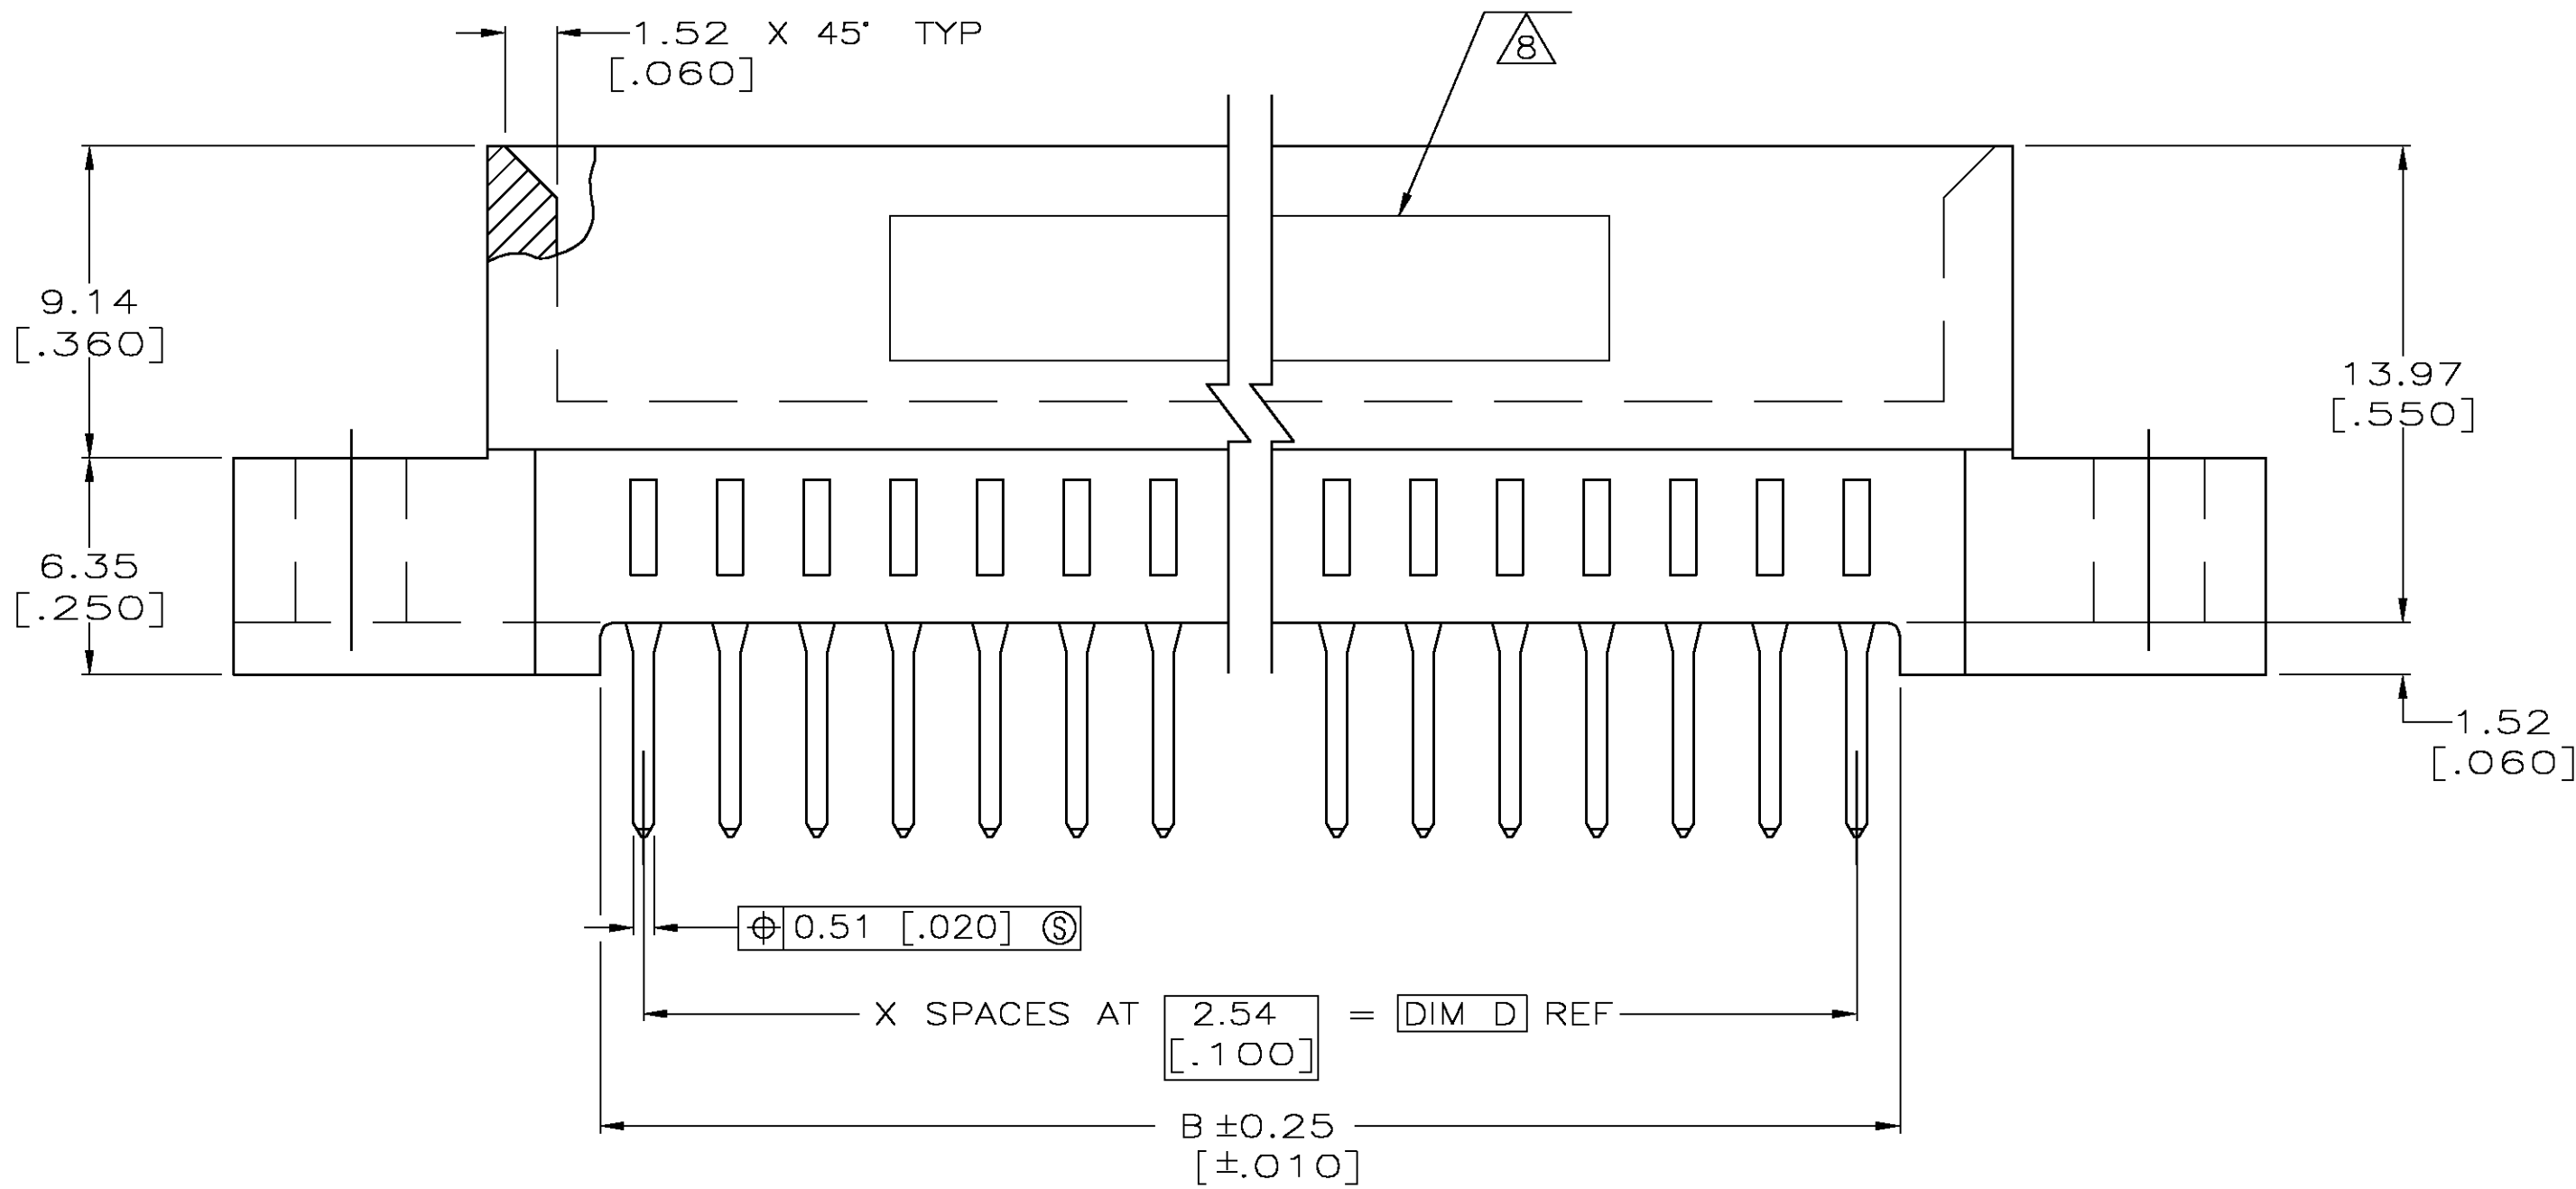

LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		AA	SEE SHEET 1			—	—

OBSOLETE		3.18 [.125]	-	-	-	-	-	-	-	20	6-530841-2
		4.75 [.187]	-	-	-	-	-	-	-	11	6-530841-1
		4.75 [.187]	-	-	-	-	-	-	-	70	6-530841-0
		3.18 [.125]	-	-	-	-	-	-	-	70	5-530841-9
		4.75 [.187]	-	-	-	-	-	-	-	70	5-530841-8
		3.18 [.125]	-	-	-	-	-	-	-	70	5-530841-7
		4.75 [.187]	-	-	-	-	-	-	-	60	5-530841-6
		3.18 [.125]	-	-	-	-	-	-	-	60	5-530841-5
		4.75 [.187]	-	-	-	-	-	-	-	60	5-530841-4
		3.18 [.125]	-	-	-	-	-	-	-	60	5-530841-3
		4.75 [.187]	167.00 [6.575]	173.61 [6.835]	149.86 [5.900]	154.94 [6.100]	152.40 [6.000]	159.00 [6.260]	59	60	5-530841-2
	OBSOLETE		4.75 [.187]	-	-	-	-	-	-	-	10
		3.18 [.125]	-	-	-	-	-	-	-	10	5-530841-0
		4.75 [.187]	-	-	-	-	-	-	-	10	5-530841-9
		3.18 [.125]	-	-	-	-	-	-	-	10	4-530841-8
		4.75 [.187]	-	-	-	-	-	-	-	35	4-530841-7
		3.18 [.125]	-	-	-	-	-	-	-	35	4-530841-6
		4.75 [.187]	-	-	-	-	-	-	-	50	4-530841-5
		3.18 [.187]	123.82 [4.875]	130.43 [5.135]	106.68 [4.200]	111.76 [4.400]	109.22 [4.300]	115.82 [4.560]	42	43	4-530841-4
		4.75 [.187]	-	-	-	-	-	-	-	40	4-530841-3
		4.75 [.187]	106.04 [4.175]	112.65 [4.435]	88.90 [3.500]	93.98 [3.700]	91.44 [3.600]	98.04 [3.860]	35	36	4-530841-2
		4.75 [.187]	-	-	-	-	-	-	-	30	4-530841-1
		4.75 [.187]	-	-	-	-	-	-	-	28	4-530841-0
FINISH 		J	F	E	D	C	B	A	X	NO OF POSN	PART NUMBER

OBSOLETE		4.75	-	-	-	-	-	-	-	-	25	4-530841-0
		[.187]	-	-	-	-	-	-	-	-	-	-
		4.75	-	-	-	-	-	-	-	-	22	3-530841-9
		[.187]	-	-	-	-	-	-	-	-	-	-
		4.75	-	-	-	-	-	-	-	-	18	3-530841-8
		[.187]	-	-	-	-	-	-	-	-	-	-
		4.75	-	-	-	-	-	-	-	-	15	3-530841-7
		[.187]	-	-	-	-	-	-	-	-	-	-
		4.75	-	-	-	-	-	-	-	-	12	3-530841-6
		[.187]	-	-	-	-	-	-	-	-	-	-
		3.18	-	-	-	-	-	-	-	-	50	3-530841-5
		[.125]	-	-	-	-	-	-	-	-	-	-
OBSOLETE		3.18	-	-	-	-	-	-	-	-	43	3-530841-4
		[.125]	-	-	-	-	-	-	-	-	-	-
		3.18	-	-	-	-	-	-	-	-	40	3-530841-3
		[.125]	-	-	-	-	-	-	-	-	-	-
		3.18	-	-	-	-	-	-	-	-	36	3-530841-2
		[.125]	-	-	-	-	-	-	-	-	-	-
OBSOLETE		3.18	-	-	-	-	-	-	-	-	30	3-530841-1
		[.125]	-	-	-	-	-	-	-	-	-	-
		3.18	85.72	92.33	68.58	73.66	71.12	77.72	27	28	3-530841-0	
		[.125]	[3.375]	[3.635]	[2.700]	[2.900]	[2.800]	[3.060]	-	-	-	-
		3.18	-	-	-	-	-	-	-	-	25	2-530841-9
		[.125]	-	-	-	-	-	-	-	-	-	-
OBSOLETE		3.18	70.48	77.09	53.34	58.42	55.88	62.48	21	22	2-530841-8	
OBSOLETE		[.125]	[2.775]	[3.035]	[2.100]	[2.300]	[2.200]	[2.460]	-	-	-	-
		3.18	-	-	-	-	-	-	-	-	18	2-530841-7
		[.125]	-	-	-	-	-	-	-	-	-	-
		3.18	-	-	-	-	-	-	-	-	15	2-530841-6
		[.125]	-	-	-	-	-	-	-	-	-	-
		3.18	45.08	51.69	27.94	33.02	30.48	37.08	11	12	2-530841-5	
OBSOLETE		[.125]	[1.775]	[2.035]	[1.100]	[1.300]	[1.200]	[1.460]	-	-	-	-
		4.75	-	-	-	-	-	-	-	-	35	2-530841-4
		[.187]	-	-	-	-	-	-	-	-	-	-
		3.18	-	-	-	-	-	-	-	-	35	2-530841-3
		[.125]	-	-	-	-	-	-	-	-	-	-
		4.75	141.60	148.21	124.46	129.54	127.00	133.60	49	50	2-530841-2	
OBSOLETE		[.187]	[5.575]	[5.835]	[4.900]	[5.100]	[5.000]	[5.260]	-	-	-	-
		4.75	123.82	130.43	106.68	111.76	109.22	115.82	42	43	2-530841-1	
		[.187]	[4.875]	[5.135]	[4.200]	[4.400]	[4.300]	[4.560]	-	-	-	-
		4.75	-	-	-	-	-	-	-	-	40	2-530841-0
		[.187]	-	-	-	-	-	-	-	-	-	-
		4.75	106.04	112.65	88.90	93.98	91.44	98.04	35	36	1-530841-9	
OBSOLETE		[.187]	[4.175]	[4.435]	[3.500]	[3.700]	[3.600]	[3.860]	-	-	-	-
		4.75	90.80	97.41	73.66	78.74	76.20	82.80	29	30	1-530841-8	
		[.187]	[3.575]	[3.835]	[2.900]	[3.100]	[3.000]	[3.260]	-	-	-	-
		4.75	-	-	-	-	-	-	-	-	28	1-530841-7
		[.187]	-	-	-	-	-	-	-	-	-	-
		4.75	78.10	84.71	60.96	66.04	63.50	70.10	24	25	1-530841-6	
OBSOLETE		[.187]	[3.075]	[3.335]	[2.400]	[2.600]	[2.500]	[2.760]	-	-	-	-
		4.75	-	-	-	-	-	-	-	-	22	1-530841-5
		[.187]	-	-	-	-	-	-	-	-	-	-
		4.75	-	-	-	-	-	-	-	-	18	1-530841-4
		[.187]	-	-	-	-	-	-	-	-	-	-
		4.75	-	-	-	-	-	-	-	-	15	1-530841-3
OBSOLETE		[.187]	-	-	-	-	-	-	-	-	-	-
		4.75	-	-	-	-	-	-	-	-	12	1-530841-2
		[.187]	-	-	-	-	-	-	-	-	-	-
		3.18	141.60	148.21	124.46	129.54	127.00	133.60	49	50	1-530841-1	
		[.125]	[5.575]	[5.835]	[4.900]	[5.100]	[5.000]	[5.260]	-	-	-	-
		3.18	-	-	-	-	-	-	-	-	43	1-530841-0
OBSOLETE		3.18	116.20	122.81	99.06	104.14	101.60	108.20	-	-	-	-
OBSOLETE		[.125]	[4.575]	[4.835]	[3.900]	[4.100]	[4.000]	[4.260]	39	40	530841-9	
OBSOLETE		3.18	106.04	112.65	88.90	93.98	91.44	98.04	-	-	-	-
OBSOLETE		[.125]	[4.175]	[4.435]	[3.500]	[3.700]	[3.600]	[3.860]	35	36	530841-8	
OBSOLETE		3.18	90.80	97.41	73.66	78.74	76.20	82.80	-	-	-	-
OBSOLETE		[.125]	[3.575]	[3.835]	[2.900]	[3.100]	[3.000]	[3.260]	29	30	530841-7	
OBSOLETE		3.18	85.72	92.33	68.58	73.66	71.12	77.72	-	-	-	-
OBSOLETE		[.125]	[3.375]	[3.635]	[2.700]	[2.900]	[2.800]	[3.060]	-	-	-	-
		3.18	78.10	84.71	60.96	66.04	63.50	70.10	24	25	530841-5	
		[.125]	[3.075]	[3.335]	[2.400]	[2.600]	[2.500]	[2.760]	-	-	-	-
		3.18	70.48	77.09	53.34	58.42	55.88	62.48	21	22	530841-4	
		[.125]	[2.775]	[3.035]	[2.100]	[2.300]	[2.200]	[2.460]	-	-	-	-
		3.18	60.32	66.93	43.18	48.28	45.72	52.32	17	18	530841-3	
OBSOLETE		[.125]	[2.375]	[2.635]	[1.700]	[1.900]	[1.800]	[2.060]	-	-	-	-
		3.18	52.70	59.31	35.56	40.64	38.10	44.70	14	15	530841-2	
		[.125]	[2.075]	[2.335]	[1.400]	[1.600]	[1.500]	[1.760]	-	-	-	-
		3.18	-	-	-	-	-	-	-	-	12	530841-1
		[.125]	-	-	-	-	-	-	-	-	-	-
		-	-	-	-	-	-	-	-	-	-	-
	FINISH 	J	F	E	D	C	B	A	X	NO OF POSN	PART NUMBER	