
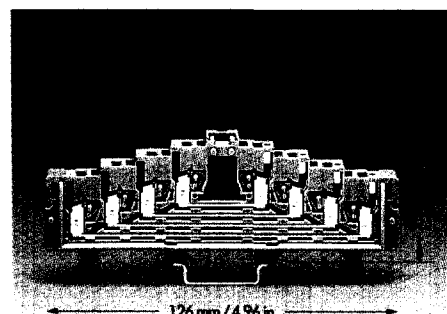


6 4-Level Terminal Blocks for Matrix Patching

12 Front-entry

	2 x 0.08 – 1.5 mm² 250 V/4 kV/3 ① 12 A Terminal block width 7.62 mm / 0.3 in  8 – 10 mm / 0.35 in * ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭ ⑮ ⑯ ⑰ ⑱ ⑲ ⑳ ㉑ ㉒ ㉓ ㉔ ㉕ ㉖ ㉗ ㉘ ㉙ ㉚ ㉛ ㉜ ㉝ ㉞ ㉟ ㊱ ㊲ ㊳ ㊴ ㊵ ㊶ ㊷ ㊸ ㊹ ㊺	2 x AWG 28 – 16 300 V, 10 A ㉞ 300 V, 10 A ㉟ Terminal block width 7.62 mm / 0.3 in  8 – 10 mm / 0.35 in * ㉞ ㉟ ㊱ ㊲ ㊳ ㊴ ㊵ ㊶ ㊷ ㊸ ㊹ ㊺	2 x 0.08 – 1.5 mm² 250 V/4 kV/3 ① 12 A Terminal block width 7.62 mm / 0.3 in  8 – 10 mm / 0.35 in * ㉞ ㉟ ㊱ ㊲ ㊳ ㊴ ㊵ ㊶ ㊷ ㊸ ㊹ ㊺	2 x AWG 28 – 16 300 V, 10 A ㉞ 300 V, 10 A ㉟ Terminal block width 7.62 mm / 0.3 in  8 – 10 mm / 0.35 in * ㉞ ㉟ ㊱ ㊲ ㊳ ㊴ ㊵ ㊶ ㊷ ㊸ ㊹ ㊺
--	--	--	--	--

- ① 250 V 4 kV 3
(see also section 10)
- ② 4 x pairs of contacts on each level
- ③ Suitable for EEx i applications
- EEx i** application
60 V = peak value
Λ table 4, EN 50020

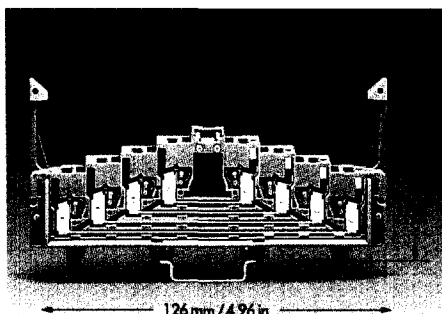

Description	Item-No.	Item-No.	Pack.-unit pcs	Item-No.	Item-No.	Pack.-unit pcs
4-level terminal block for matrix patching ②, for DIN 35 rail acc. to EN 50022	with locking clips	for DIN 35 x 7.5 727-219 ③ 727-229 ③	50	without locking clips	for DIN 35 x 7.5 727-220 ③ 727-230 ③	50
	grey	727-221 ③ 727-231 ③	50	grey	727-222 ③ 727-232 ③	50
	white	727-223 ③ 727-233 ③	50	white	727-224 ③ 727-234 ③	50
	blue ①			blue ①		
Accessories (see also section 8)	Appropriate marking system	WMB/WSB		Appropriate marking system	WMB/WSB	
 4-level end plate, without printing	7.62 mm/0.3 in thick			7.62 mm/0.3 in thick		
	orange 727-217		25	orange 727-217		25
 4-level end plate, numeric printing	7.62 mm/0.3 in thick 0-1-2-3--3-2-1-0			7.62 mm/0.3 in thick 0-1-2-3--3-2-1-0		
	orange 727-205		25	orange 727-205		25
 4-level end plate, alphanumeric printing	7.62 mm/0.3 in thick a-b-c-d--d-c-b-a			7.62 mm/0.3 in thick a-b-c-d--d-c-b-a		
	orange 727-206		25	orange 727-206		25
 4-level end plate, numeric printing	7.62 mm/0.3 in thick 3-2-1-0--0-1-2-3			7.62 mm/0.3 in thick 3-2-1-0--0-1-2-3		
	orange 727-207		25	orange 727-207		25
 4-level end plate, alphanumeric printing	7.62 mm/0.3 in thick d-c-b-a--a-b-c-d			7.62 mm/0.3 in thick d-c-b-a--a-b-c-d		
	orange 727-208		25	orange 727-208		25
 Wire harness support, see also page 6.17	grey 249-109		50	grey 249-109		50
 WSB-Double marker carrier, for I/O markings in the terminal block center	4 mm/0.157 in wide 209-128		200 (2 x 100)	4 mm/0.157 in wide 209-128		200 (2 x 100)
 Screwless end stop	6 mm/0.236 in wide 249-116 10 mm/0.394 in wide 249-117		100 (4 x 25) 50 (2 x 25)	6 mm/0.236 in wide 249-116 10 mm/0.394 in wide 249-117		100 (4 x 25) 50 (2 x 25)
 Test plug, 2.3 mm/0.091 in Ø with cable 500 mm/1.77"	yellow 210-137		50 (5 x 10)	yellow 210-137		50 (5 x 10)
 Reducing test plug, from 4 mm/0.157 in Ø socket to 2.3 mm/0.091 in Ø plug	red 210-297		100 (4 x 25)	red 210-297		100 (4 x 25)
 Wire commoning chain, insulated, 6 A, 32 connections, 0.5 mm ² , max. 50 V	grey 709-107		1	grey 709-107		1
 Insulation stop, 8 pcs/strip 0.08–0.14 mm ² "f-st"/0.08–0.2 mm ² "s" 0.14–0.25 mm ² "f-st"/0.25 mm ² "s" 0.25–0.5 mm ² "s + f-st"	white 727-197 light grey 727-198 dark grey 727-199		200 (8 x 25) 200 (8 x 25) 200 (8 x 25)	white 727-197 light grey 727-198 dark grey 727-199		200 (8 x 25) 200 (8 x 25) 200 (8 x 25)
③ Additional item-No. for terminal blocks with marking	0-1-2-3--3-2-1-0 a-b-c-d--d-c-b-a 3-2-1-0--0-1-2-3 d-c-b-a--a-b-c-d	...-.../021-000 ...-.../022-000 ...-.../023-000 ...-.../024-000				

* For further approvals with corresponding ratings see pages 10.3 ff.

** if approved by the works expert