

HIGH FREQUENCY COMMON MODE CHOKES

NEW!

Low Cost Encapsulated Package

Toroidal Construction

Isolation 1500 V_{RMS} Minimum


Materials used in the construction of these parts are UL 94 VO and are rated at 130° C or better

Surface Mount parts available in Tape & Reel

Electrical Specifications⁽¹⁾ at 25°C


Thru Hole P/N	Surface Mount P/N	L ⁽²⁾ Min. (μH)	DCR Max. (Ω)	L _L Max. (μH)	C _{w/w} Max. (pF)	SRF Typ. (MHz)
L-45001	L-45051	10000	1.6	40	11	0.98
L-45002	L-45052	7000	1.4	35	10	1.25
L-45003	L-45053	5000	1.2	30	9	1.80
L-45004	L-45054	2500	1.0	25	8	2.70
L-45005	L-45055	1500	0.9	12	8	4.10
L-45006	L-45056	1000	0.8	11	7	5.20
L-45007	L-45057	750	0.7	10	6	6.60
L-45008	L-45058	500	0.6	9	5	7.70
L-45009	L-45059	250	0.8	10	6	>13
L-45010	L-45060	100	0.7	8	5	>13
L-45011	L-45061	500	0.6	6	4	>13
L-45012	L-45062	25	0.5	4	3	>13

1. I_{MAX} is 32 mA for all parts @ 500 cm/A
2. Tested @ 10KHz & 100mV

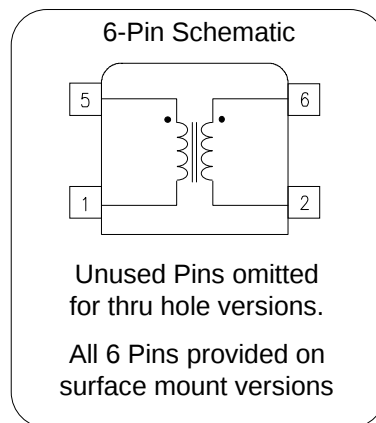

Package Physical Dimensions in Inches (mm)

"T6" - Unused Pins Removed

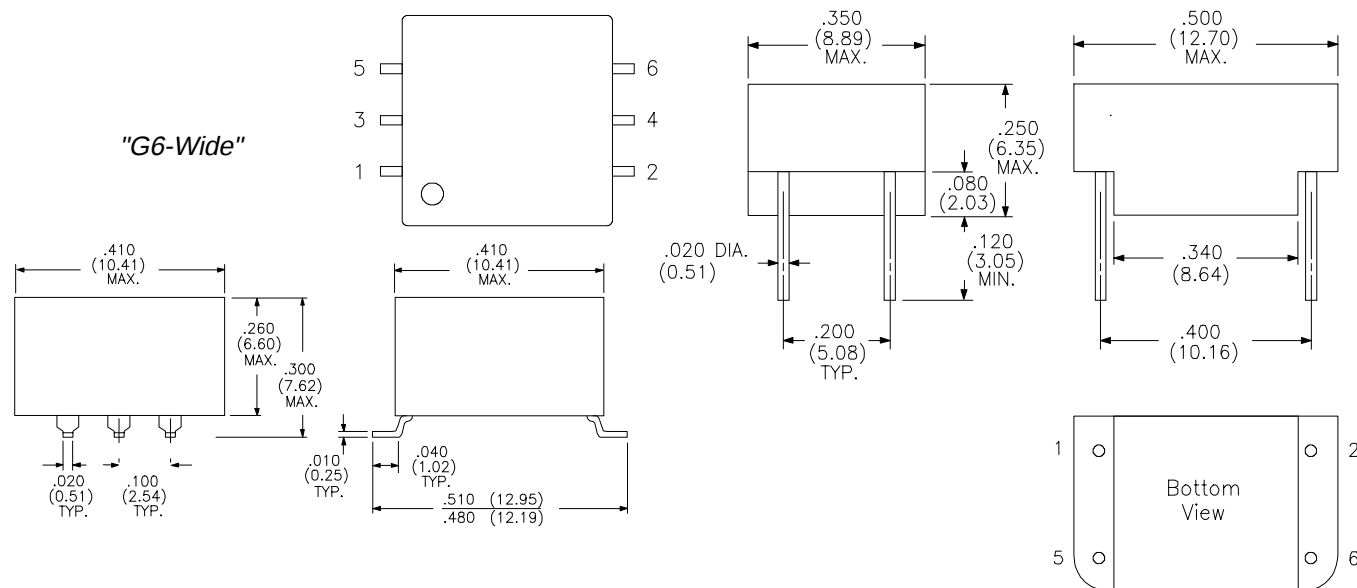

Specifications are subject to change without notice

FILTER - 5/97