
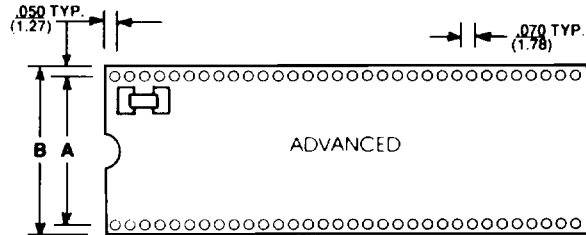


Shrink Dip Decoupling Capacitor Sockets .070" (1.78 mm) Pitch

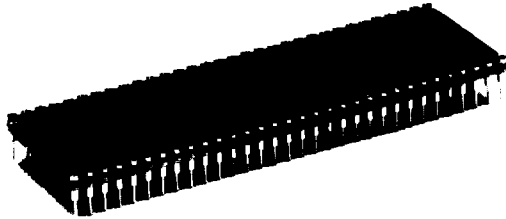

Features:

- .070" (1.78 mm) spacing pin to pin.
- Standard decoupling capacitor values of .01µf, .1µf and .33µf. Other capacitor values available to suit your electrical requirements.
- Multiple finger contact for reliability.
- Tapered entry for ease of insertion.
- Closed end construction for 100% anti-wicking of solder.

Terminals and Contacts:


Terminal: Brass per QQ-B-626
 Contact: Beryllium Copper per QQ-C-533

Plating:

Terminal: Gold over Nickel or Tin-Lead over Nickel
 Contact: Gold over Nickel or Tin-Lead over Nickel

Body Material:

Copper Clad FR-4, Tin Plated
 U.L. Rated 94V-O, Index 140°C (284°F)

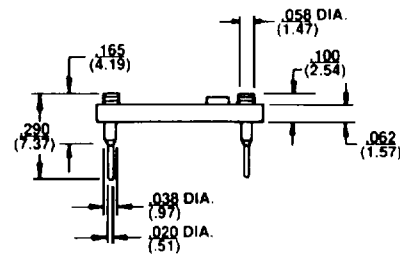

# of Pins	A	B
28	.400 (10.16)	.500 (12.70)
30	.400 (10.16)	.500 (12.70)
48	.400 (10.16)	.500 (12.70)
64	.750 (19.05)	.850 (21.59)
64	.900 (22.86)	1.000 (25.40)
68	.600 (15.24)	.700 (17.78)

How To Order

