2.54mm (.100") Pitch QF 50™ Transition Connector

5360 Dual Row, Shrouded Header Eliminator Type

FEATURES AND SPECIFICATIONS

Features and Benefits
- Sizes 10 to 60 circuits
- 6.00mm (.236") wide; uses minimal board space
- Symmetrical upper housing
- U-contact terminal design
- Housings available with covers pre-assembled or loose

Reference Information
Packaging: Tray
Tooling Information: See pages B-30 to B-33
UL File No.: E29179-E
CSA File No.: LR37272-P21
Use Molex Cable: 6800 and 40158
Designed In: Millimeters

Electrical
Current: 1.0A
Contact Resistance: 20mΩ max.
Dielectric Withstanding Voltage: 500V AC
Insulation Resistance: 1000 MΩ min.

Physical
Housing: Black polyester, UL 94V-0
Contact: Phosphor Bronze
Plating: Tin
Temperature: -40 to +105°C
Cable Accommodation: 28 AWG stranded
Insulation Range: 1.14mm (.045") diameter max.



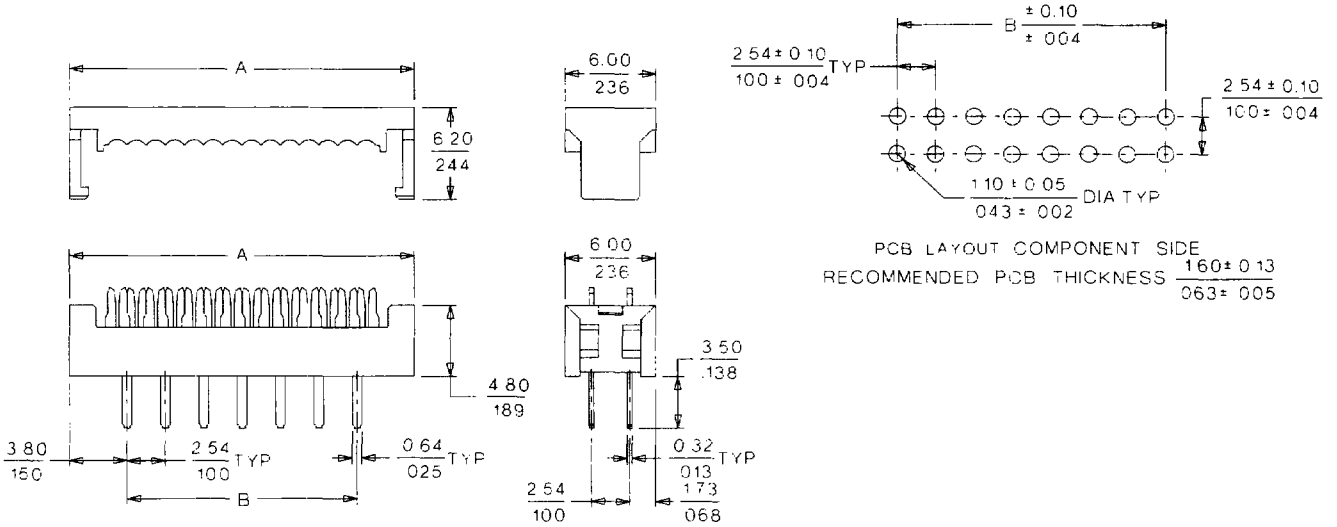

ORDERING INFORMATION AND DIMENSIONS

Circuits	Order No.		Dimension	
	Unloaded (Cover and Housing Separate)	Preloaded (Cover and Housing Pre-Assembled)	A	B
10	• 15-38-0103	• 15-38-0104	17.76 (.699)	10.16 (.400)
14	• 15-38-0143	• 15-38-0144	22.84 (.899)	15.24 (.600)
16	• 15-38-0163	• 15-38-0164	25.38 (.999)	17.78 (.700)
20	• 15-38-0203	• 15-38-0204	30.46 (1.199)	22.86 (.900)
26	• 15-38-0263	• 15-38-0264	38.08 (1.499)	30.48 (1.200)
30	• 15-38-0303	• 15-38-0304	43.16 (1.699)	35.56 (1.400)
34	• 15-38-0343	• 15-38-0344	48.24 (1.899)	40.64 (1.600)
40	• 15-38-0403	• 15-38-0404	55.86 (2.199)	48.26 (1.900)
50	• 15-38-0503	• 15-38-0504	68.56 (2.699)	60.96 (2.400)
60	• 15-38-0603	• 15-38-0604	81.26 (3.199)	73.66 (2.900)

• US Standard Product, available through Molex franchised distributors