

BNC Series BNC Female, R/A PCB Mounting Type




No.	Material & Plating
1	Center contact : Phosphor bronze,Gold plated
2	Body : Diecast (Zinc #3),Nickel plated
3	Insulator : Polypropylene UL 94V-0
4	Mounting post : Brass , Tin plated
5	Solder tail : Brass , Tin plated
6	Washer : Phosphor bronze,Nickel plated
7	Nut : Brass,Nickel plated
8	Housing : UL 94V-0 PBT

Ordering Information:


Unit : $\frac{\text{mm}}{\text{inch}}$

BNC - 000 $\frac{S}{1} \frac{*}{2} \frac{*}{3} \frac{0}{4}$

1. S : Standard
2. Variations:
0 : 50 Ω
1 : 75 Ω
3. Body height
0 : Dim.A=13.16mm(.518"), Dim.B=6.85mm(.270")
1 : Dim.A=15.85mm(.624"), Dim.B=8.15mm(.321")
4. Body color :
0 : White Body
1 : Black Body

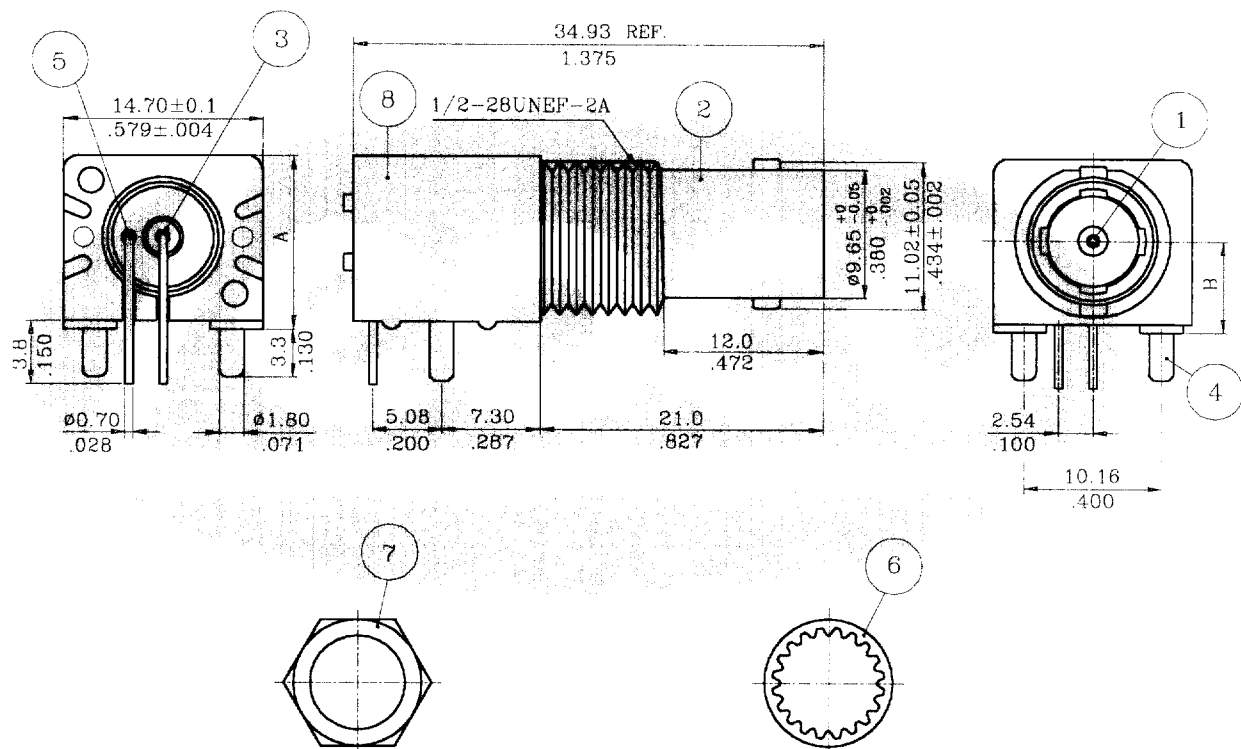


1/2-28UNEF-2B
Clamp Nut

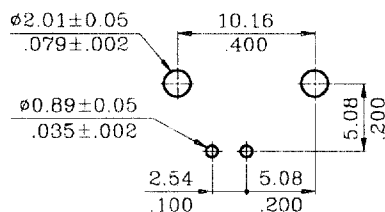

RECOMMENDED HOLD PATTERN

Lock Washer



Mounting Hole

Panel Thickness: 5.5mm(.217") max.

BNC Series BNC Female , R/A PCB Mounting Type



Unit : $\frac{\text{mm}}{\text{inch}}$

No.	Material & Plating
1	Center contact : Phosphor bronze, Gold plated
2	Body : Diecast (Zinc #3), Nickel plated
3	Insulator : UL 94V-0 PBT
4	Mounting post : Brass, Tin plated
5	Ground tail : Brass, Tin plated
6	Washer : Phosphor bronze, Nickel plated
7	Nut : Brass, Nickel plated

Ordering Information:

BNC - 000 S • • 2
1 2 3 4

1. S : Standard

2. Variations:

0 : 50 Ω

1 : 75 Ω


3. Body height

0 : Dim.A=12.30mm(.484"), Dim.B=7.25mm(.285")

1 : Dim.A=15.85mm(.624"), Dim.B=8.30mm(.327")


4. Body color :

2 : Diecast Body

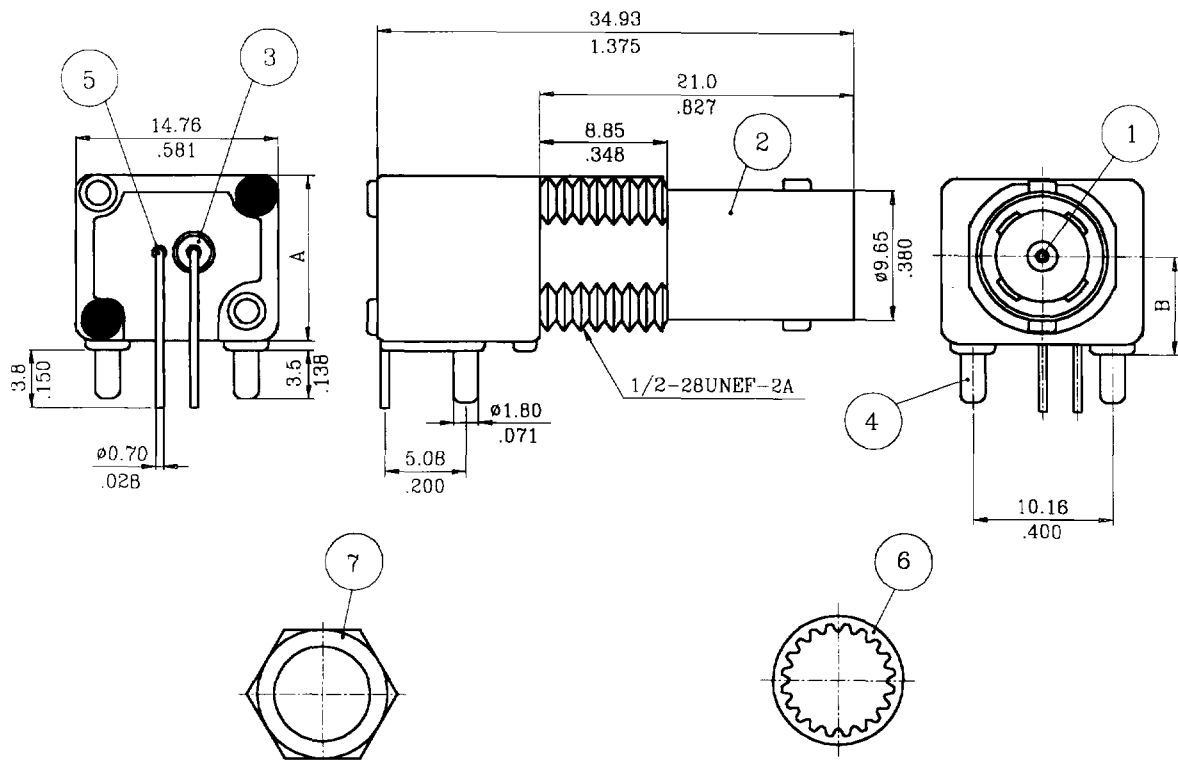


1/2-28UNEF-2B
Clamp Nut

Lock Washer

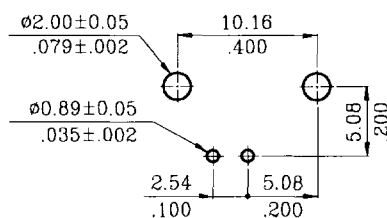

RECOMMENDED HOLE PATTERN



Mounting Hole

Panel Thickness: 5.5mm(.217") max.