


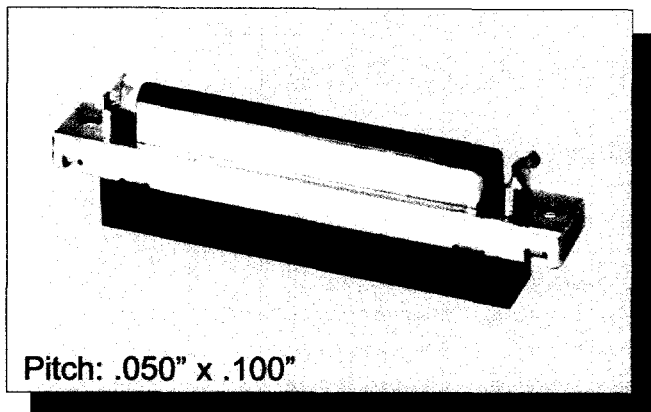

Pitch: .050" x .100"

CA- POSITION NFDS-E-1

POSITION	
50	68

DIMENSIONS				
Position	A	B	C	D
50	2.065 [52.45]	1.200 [30.58]	1.830 [46.48]	1.665 [42.30]
68	2.515 [63.88]	1.650 [41.91]	2.280 [57.91]	2.115 [53.72]

HIGH DENSITY IDT SCSI PANEL MOUNT SOCKET WITH LATCHES

SPECIFICATIONS

Meets: SCSI standard

ENVIRONMENTAL

Temperature Range: -55°C to +105°C

MECHANICAL

Insulator Material: Glass-filled polyester, black, UL94V-0

Shell Material: Steel, tin plated

Contact Material: Phosphor Bronze

Contact Plating: Mating Area: 30μ IN gold


Terminates To: .025" cable, 30 AWG

ELECTRICAL

Current Rating: 0.5 AMP



Patented 4 Point/3 Blade
I.D. Contact
[30 AWG solid wire shown]

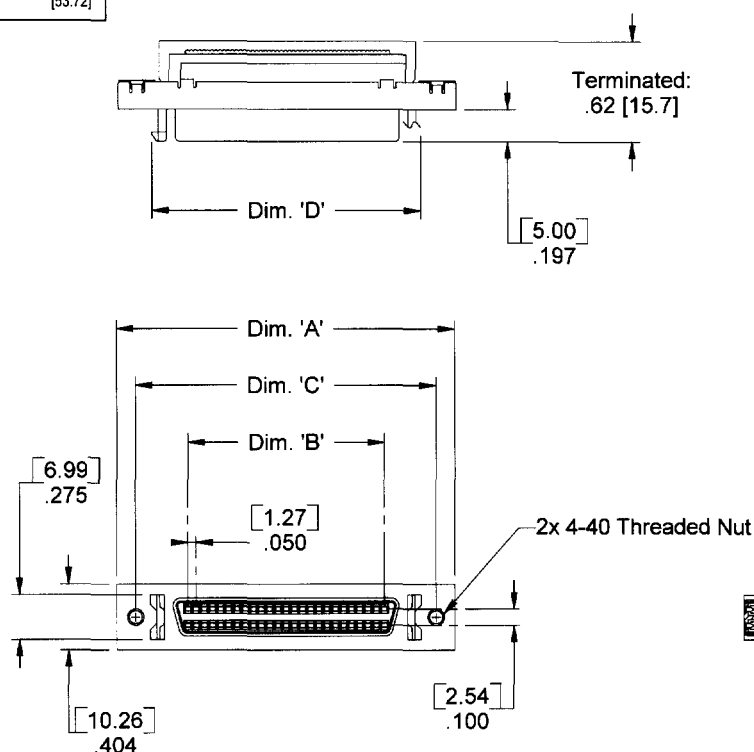

Drawing Number CA-620349