Product Specifications



F4G-PDFDR-1M-3GSH

FSJ4-50B SureFlex™ Jumper with interface types 7-16 DIN Female and 7-16 DIN Male Right Angle, 1 m



CHARACTERISTICS

General Specifications


Body Style, Connector A Straight Body Style, Connector B Right angle Cable Family FSJ4-50B

Interface, Connector A 7-16 DIN Female Interface, Connector B 7-16 DIN Male 1.000 m | 3.281 ft Length

Electrical Specifications

3rd Order IMD -116.00 dBm DTF, Connector A -34.00 dB DTF, Connector B -34.00 dB

Jumper Assembly Sample Label

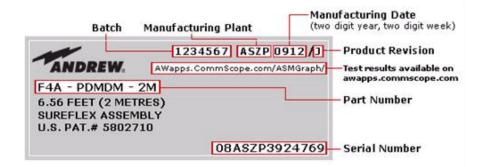

Return Loss

Frequency Band VSWR Return Loss (dB) 698-960 MHz 1.08 28.00 1700-2200 MHz 28.00 1.08

Regulatory Compliance/Certifications

Agency Classification

www.commscope.com/andrew





Product Specifications



F4G-PDFDR-1M-3GSH

RoHS 2002/95/EC China RoHS SJ/T 11364-2006 Compliant by Exemption
Above Maximum Concentration Value (MCV)





INCLUDED PRODUCTS



FSJ4-50B

FSJ4-50B, HELIAX® Superflexible Foam Coaxial Cable, corrugated copper, 1/2 in, black PE jacket



L4DR-PS

7-16 DIN Male Right Angle for 1/2 in LDF4-50A cable



L4NR-PS

Type N Male Right Angle for 1/2 in LDF4-50A cable

F4DR-C

7-16 DIN Male Right Angle for 1/2 in FSJ4-50B cable



F4NR-HC

Type N Male Right Angle for 1/2 in FSJ4-50B cable