


Gds A-B, Gds A-2B DIN 41 612 · Type B



Number of contacts


64, 32

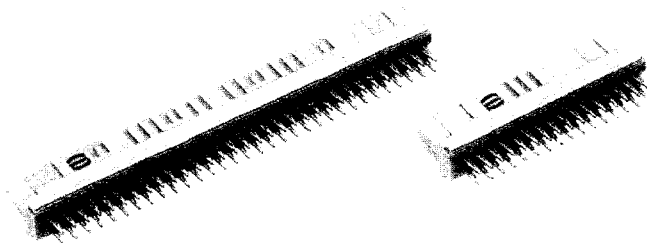


Female connectors without fixing flange

Identification	Number of contacts	Contact arrangement	Part No. 3	Performance levels according to DIN 41 612, explanations page 10 2	1	
Female connector						
with press-in terminations						
5.5 mm						
Gds A-B	64		09 02 164 7870	09 02 164 6870	performance level 1 or special gold plating on request	
Gds A-2B	32		09 22 132 7870	09 22 132 6870		
13 mm						
Gds A-B	64		09 02 164 7840 09 02 164 7893*	09 02 164 6840 09 02 164 6893*		
Gds A-2B	32		09 22 132 7840	09 22 132 6840		
17 mm						
Gds A-B	64		09 02 164 7810 09 02 164 7898*	09 02 164 6810 09 02 164 6898*		
Gds A-2B	32		09 22 132 7810	09 22 132 6810		

Dimensions

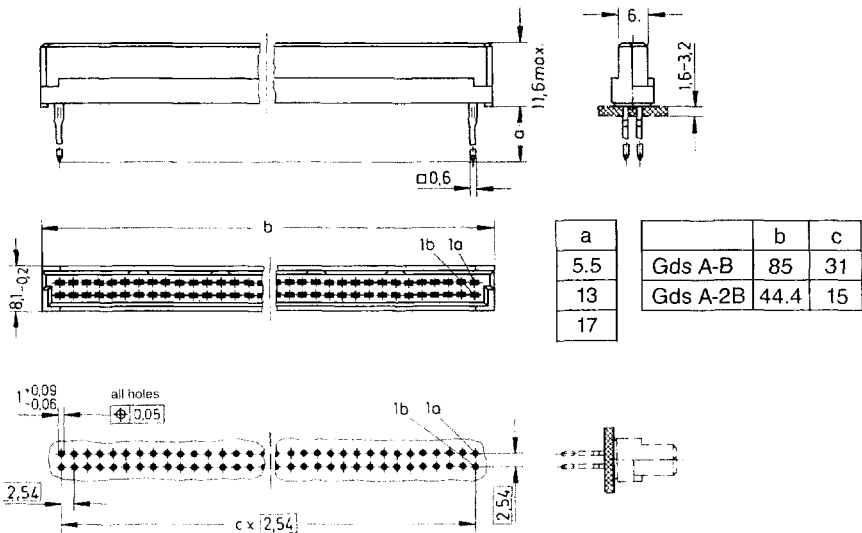

Board drillings

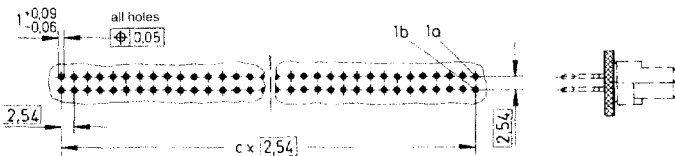

Dimensions in mm

*Wrap posts for interfacing selectively gold plated (performance level 3)
Connectors with contacts in other positions/rows and fully gold plated wrap posts on request

boldtype = preference types