



DIMENSIONS mm (inches)

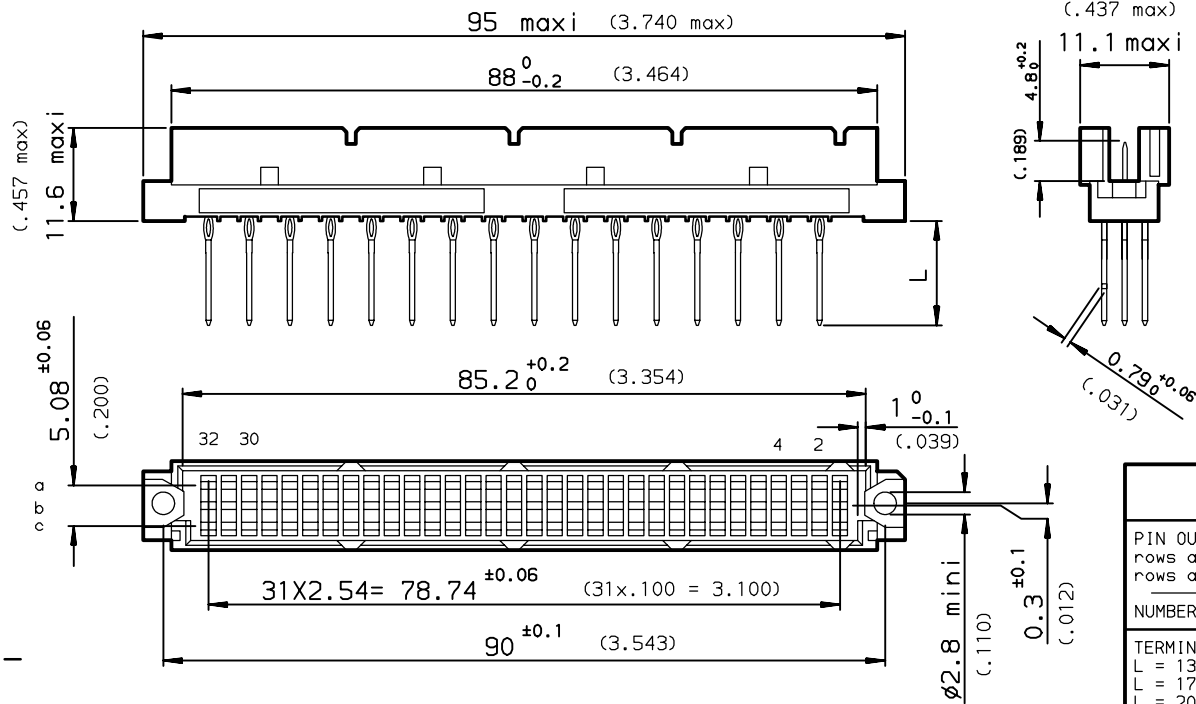

PCB DRILLING

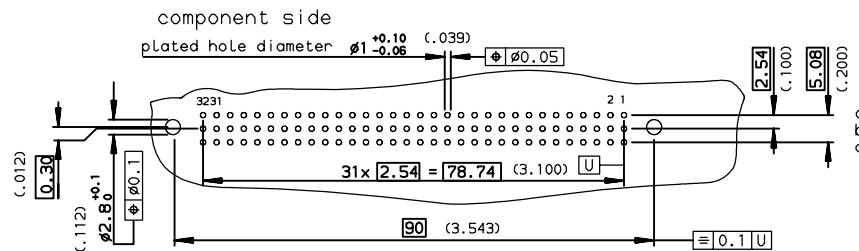

PART NUMBER		8609		78		7		8	
PIN OUT		rows a-b-c		3		48			
rows a-c		4		32					
NUMBER OF CONTACTS									
TERMINATION		L = 13.25 ±0.25 (.521)		1 wrap		91			
		L = 17.25 ±0.25 (.679)		2 wraps		92			
		L = 20.00 ±0.25 (.787)		3 wraps		93			
		L = 4.20 ±0.25 (.165)		short post		94			
PERFORMANCE CLASS		DIN 41612 class 3				4			
		DIN 41612 class 2				5			
		DIN 41612 class 1				6			
TERMINATION TYPE		TIN LEAD				000E1			
		LEAD FREE				E1LF			

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS: SEE DRAWING C-8609-0000C

European Views

www.fciconnect.com		surface ISO 1302		tolerance std ISO 406 ISO 1101		projection mm	
		ANGULAR		LINEAR		size A3	
		0.XX' ±2'		0.XX ±0.1		Scale 1.5	
		0.XX ±0.1		0.XXX ±0.1		ECN LS06-0095	
Dr ROUILLARD 1997/10/28		Product family DIN 8609		Spec ref -			
Eng TARON 1997/10/28							
Chr LEGARE 1997/10/28							
Appr LEGARE 1997/10/28							
FCI		title STRAIGHT MALE - STYLE R		dwg no C-8609-0643		Rev. E	
		PRESS FIT					
		catalog no		CUSTOMER		sheet 1 of 1	

rev	ecn no	dr	date
C	-	ROU	1999/04/22
D	LS05-004	JTA	2005/02/26
E	LS06-0095	LGO	2006/06/22
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-