



DIMENSIONS mm (inches)

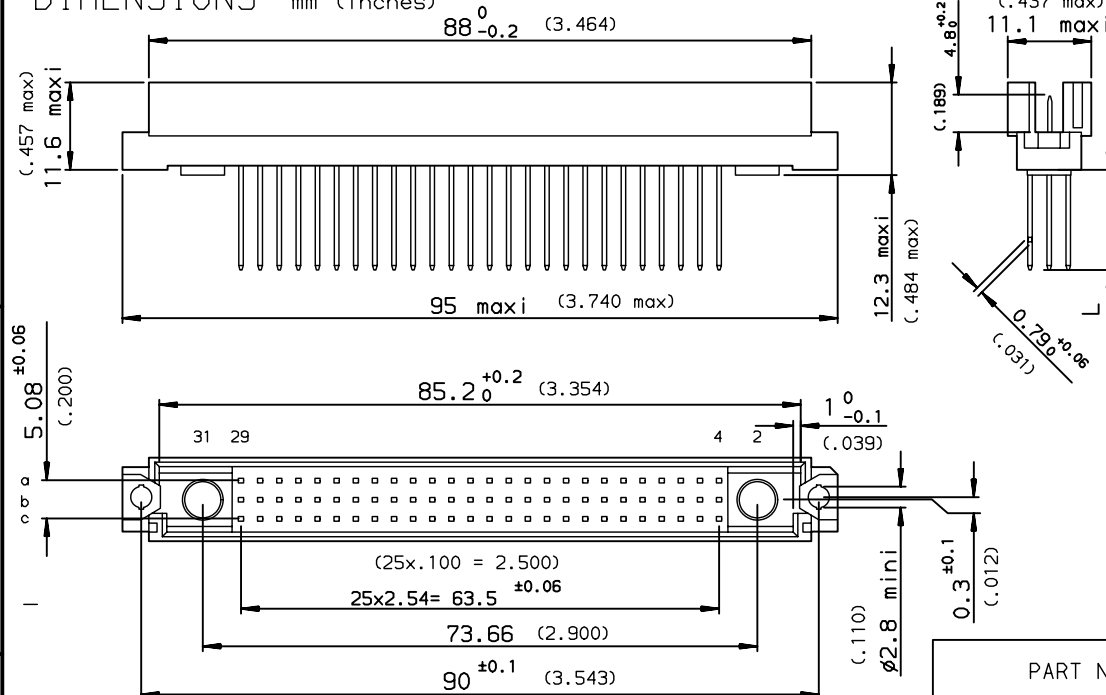

PCB DRILLING

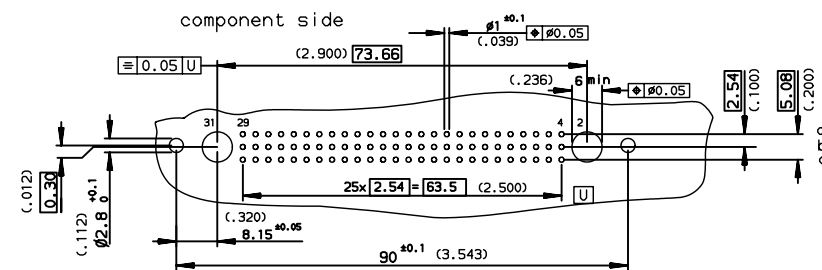

PART NUMBER		8609		A8		7		5	
PIN OUT									
rows a-b-c		3		78					
rows a-c		4		52					
NUMBER OF CONTACTS									
TERMINATION									
L = 13.3 ±0.25 (.523)		WW		15					
L = 17.95 ±0.25 (.706)		WW		25					
PERFORMANCE CLASS									
DIN 41612 class 3								4	
DIN 41612 class 2								5	
DIN 41612 class 1								6	
TERMINATION TYPE									
TIN LEAD								000E1	
LEAD FREE								E1LF	

GENERAL CHARACTERISTIC and ROHS INFORMATION
SEE DRAWING C-8609-0000B

European Views

rev	ecn no	dr	date
B	-	HLE	1996/02/21
C	LS07-0130	HLE	2007/05/21
D	LS07-0211	HLE	2007/08/08
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com		surface ISO 1302		tolerance std ISO 406 ISO 1101		projection A3		mm	
		TOLERANCES UNLESS OTHERWISE SPECIFIED							
		ANGULAR		LINEAR					
		0.X		±0.1		size		Scale 1.5	
		0.XX		±0.1					
		0.XXX		±0.1		ECN		LS07-0211	
Dr LEGALLIC 1996/02/21		Chr LEGARE 1996/02/21		Appr LEGARE 1996/02/21		Product family		DIN Spec ref -	
FCJ		title		STRAIGHT MALE WITH		dwg no		C-8609-0321	
		catalog no		SEE TABLE		CUSTOMER		sheet 1 of 1	
								Rev. D	

REV F - 2006-04-17