

T-1 (3 mm) High Intensity LED Lamps


Technical Data

HLMP-132x Series
HLMP-142x Series
HLMP-152x Series

Features

- **High Intensity**
- **Choice of 3 Bright Colors**
 High Efficiency Red
 Yellow
 High Performance Green
- **Popular T-1 Diameter Package**
- **Selected Minimum Intensities**
- **Narrow Viewing Angle**


- **General Purpose Leads**
- **Reliable and Rugged**
- **Available on Tape and Reel**
- **For more information, please refer to Tape and Reel Option Data Sheet**

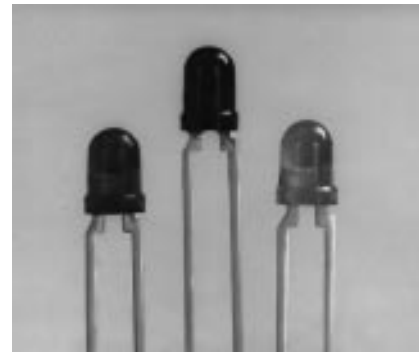

Description

This family of T-1 lamps is specially designed for applications requiring higher on-axis intensity than is achievable with a standard lamp. The light generated is focused to a narrow beam to achieve this effect.

Package Dimensions

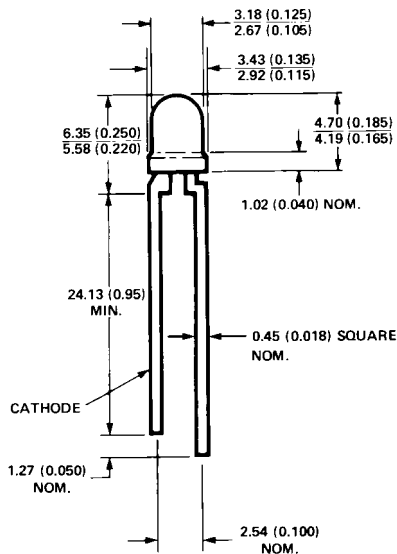


NOTES:
 1. ALL DIMENSIONS ARE IN MILLIMETRES (INCHES).
 2. AN EPOXY MENISCUS MAY EXTEND ABOUT 1mm (0.040") DOWN THE LEADS.

Selection Guide

Part Number	Package Description	Color	Luminous Intensity Iv (mcd) @ 10 mA	
			Min.	Max.
HLMP-1320-G00xx	Untinted, Nondiffused	High Efficiency Red	8.6	–
HLMP-1320-GH0xx	Nondiffused		8.6	27.6
HLMP-1321	Tinted, Nondiffused		8.6	–
HLMP-1321-G00xx			8.6	–
HLMP-1321-HI0xx		13.8	44.0	
HLMP-1420	Microtinted, Nondiffused	Yellow	9.2	–
HLMP-1420-F00xx	Nondiffused		9.2	–
HLMP-1421	Tinted, Nondiffused		9.2	–
HLMP-1421-F00xx			9.2	–
HLMP-1421-FG0xx		9.2	29.4	
HLMP-1520	Microtinted, Nondiffused	Green	6.7	–
HLMP-1520-E00xx	Nondiffused		6.7	–
HLMP-1521	Tinted, Nondiffused		6.7	–
HLMP-1521-E00xx			6.7	–
HLMP-1521-EF0xx			6.7	21.2

Part Numbering System

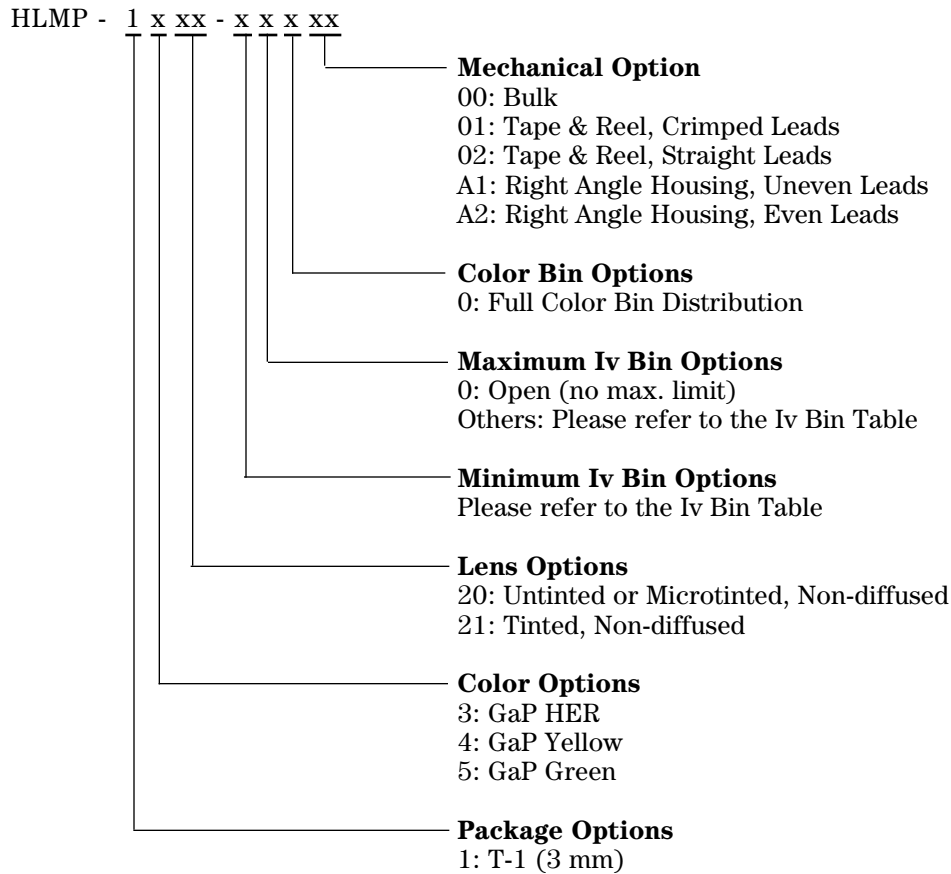

Absolute Maximum Ratings at $T_A = 25^\circ\text{C}$

Parameter	Red	Yellow	Green	Units
Peak Forward Current	90	60	90	mA
Average Forward Current ^[1]	25	20	25	mA
DC Current ^[2]	30	20	30	mA
Power Dissipation ^[3]	135	85	135	mW
Reverse Voltage ($I_R = 100 \mu\text{A}$)	5	5	5	V
Transient Forward Current ^[4] (10 μsec Pulse)	500	500	500	mA
LED Junction Temperature	110	110	110	$^\circ\text{C}$
Operating Temperature Range	-55 to +100	-55 to +100	-20 to +100	$^\circ\text{C}$
Storage Temperature Range			-55 to +100	
Lead Soldering Temperature [1.6 mm (0.063 in.) from body]	260 $^\circ\text{C}$ for 5 seconds			

Notes:

- See Figure 5 (Red), 10 (Yellow), or 15 (Green) to establish pulsed operating conditions.
- For Red and Green series derate linearly from 50 $^\circ\text{C}$ at 0.5 mA/ $^\circ\text{C}$. For Yellow series derate linearly from 50 $^\circ\text{C}$ at 0.2 mA/ $^\circ\text{C}$.
- For Red and Green series derate power linearly from 25 $^\circ\text{C}$ at 1.8 mW/ $^\circ\text{C}$. For Yellow series derate power linearly from 50 $^\circ\text{C}$ at 1.6 mW/ $^\circ\text{C}$.
- The transient peak current is the maximum non-recurring peak current that can be applied to the device without damaging the LED die and wirebond. It is not recommended that the device be operated at peak currents beyond the peak forward current listed in the Absolute Maximum Ratings.

Electrical Characteristics at $T_A = 25^\circ\text{C}$

Symbol	Description	Device HLMP-	Min.	Typ.	Max.	Units	Test Conditions
I_V	Luminous Intensity	1320 1321	8.6 8.6	30 30		mcd	$I_F = 10\text{ mA}$ (Figure 3)
		1420 1421	9.2 9.2	15 15		mcd	$I_F = 10\text{ mA}$ (Figure 8)
		1520 1521	6.7 6.7	22 22		mcd	$I_F = 10\text{ mA}$ (Figure 3)
$2\theta^{1/2}$	Including Angle Between Half Luminous Intensity Points	All		45		Deg.	$I_F = 10\text{ mA}$ See Note 1 (Figures 6, 11, 16, 21)
λ_{PEAK}	Peak Wavelength	132x		635		nm	Measurement at Peak (Figure 1)
		142X 152X		583 565			
$\Delta\lambda_{1/2}$	Spectral Line Halfwidth	132x		40		nm	
		142X 152X		36 28			
λ_d	Dominant Wavelength	132x		626		nm	See Note 2 (Figure 1)
		142X 152X		585 569			
τ_s	Speed of Response	132x		90		ns	
		142X 152X		90 500			
C	Capacitance	132x		11		pF	$V_F = 0; f = 1\text{ MHz}$
		142X 152X		15 18			
$R\theta_{\text{J-PIN}}$	Thermal Resistance	All		290		$^\circ\text{C/W}$	Junction to Cathode Lead
V_F	Forward Voltage	132x		1.9	2.4	V	$I_F = 10\text{ mA}$
		142X 152X		2.0 2.1	2.4 2.7		
V_R	Reverse Breakdown Voltage	All	5.0			V	$I_R = 100\ \mu\text{A}$
η_V	Luminous Efficacy	132x		145		lumens	See Note 3
		142X 152X		500 595		Watt	

Notes:

- $\theta^{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
- The dominant wavelength, λ_d , is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.
- Radiant intensity, I_e , in watts/steradian, may be found from the equation $I_e = I_V/\eta_V$, where I_V is the luminous intensity in candelas and η_V is the luminous efficacy in lumens/watt.

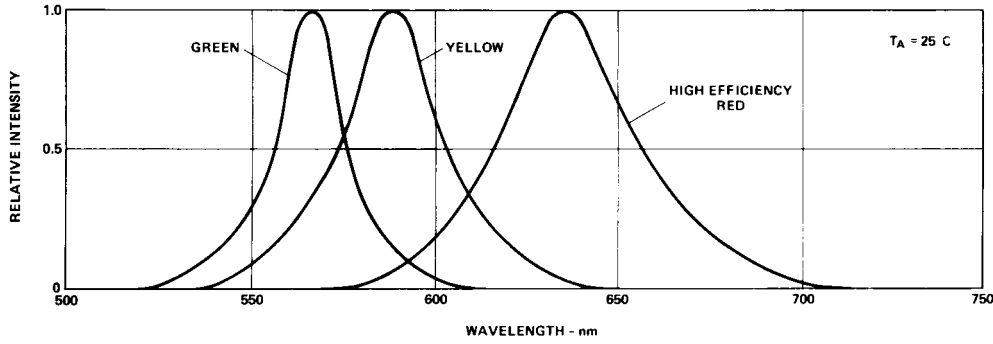


Figure 1. Relative Intensity vs. Wavelength.

T-1 High Efficiency Red Non-Diffused

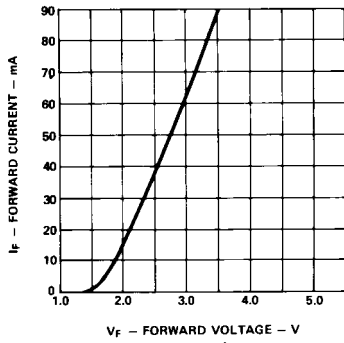


Figure 2. Forward Current vs. Forward Voltage Characteristics.

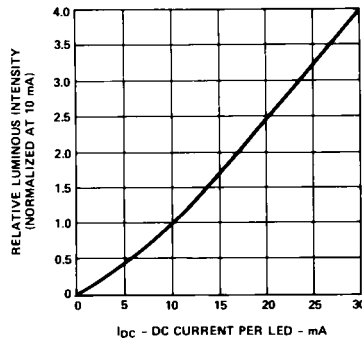


Figure 3. Relative Luminous Intensity vs. DC Forward Current.

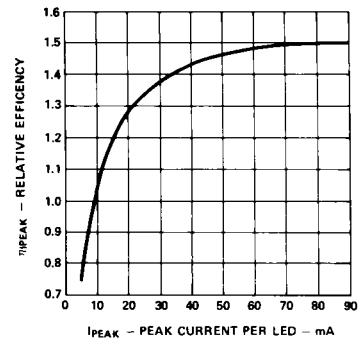


Figure 4. Relative Efficiency (Luminous Intensity per Unit Current) vs. Peak LED Current.

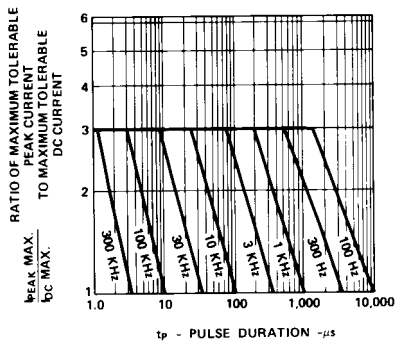


Figure 5. Maximum Tolerable Peak Current vs. Pulse Duration. (I_{DC} MAX as per MAX Ratings).

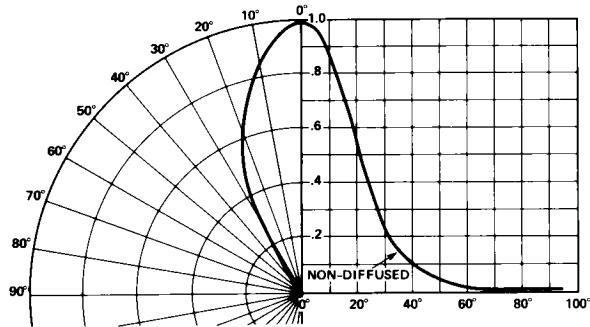


Figure 6. Relative Luminous Intensity vs. Angular Displacement.

T-1 Yellow Non-Diffused

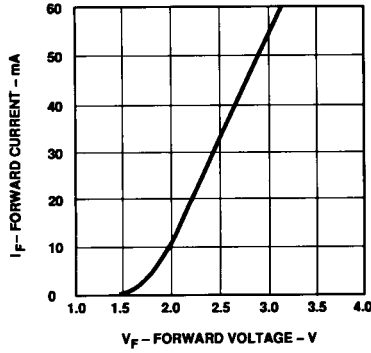


Figure 7. Forward Current vs. Forward Voltage Characteristics.

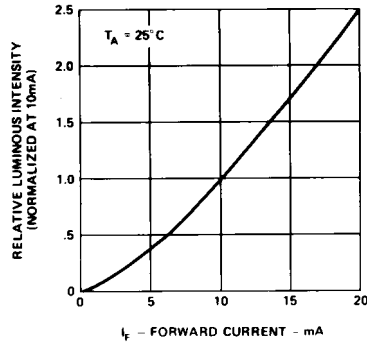


Figure 8. Relative Luminous Intensity vs. Forward Current.

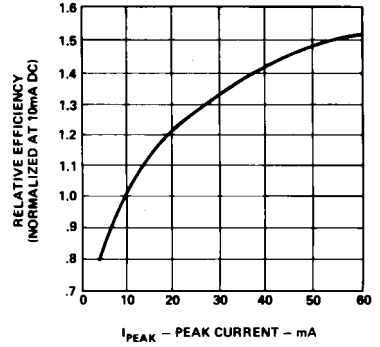


Figure 9. Relative Efficiency (Luminous Intensity per Unit Current) vs. Peak Current.

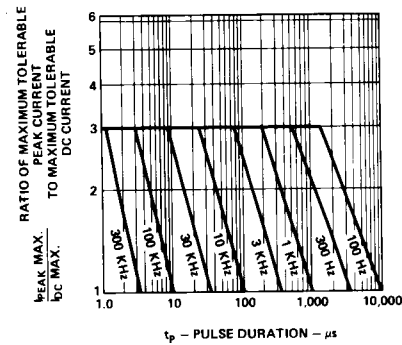


Figure 10. Maximum Tolerable Peak Current vs. Pulse Duration. ($I_{DC}MAX$ as per MAX Ratings).

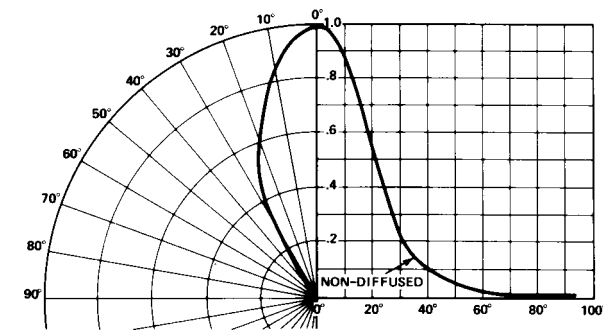


Figure 11. Relative Luminous Intensity vs. Angular Displacement.

T-1 Green Non-Diffused

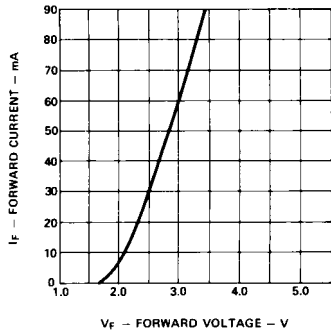


Figure 12. Forward Current vs. Forward Voltage Characteristics.

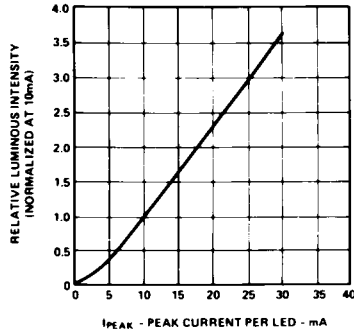


Figure 13. Relative Luminous Intensity vs. Forward Current.

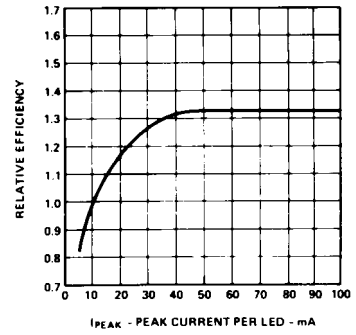


Figure 14. Relative Efficiency (Luminous Intensity per Unit Current) vs. Peak LED Current.

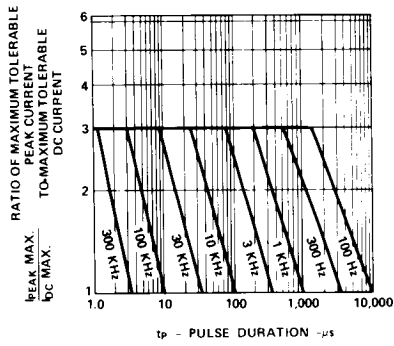


Figure 15. Maximum Tolerable Peak Current vs. Pulse Duration. (I_{DCMAX} as per MAX Ratings).

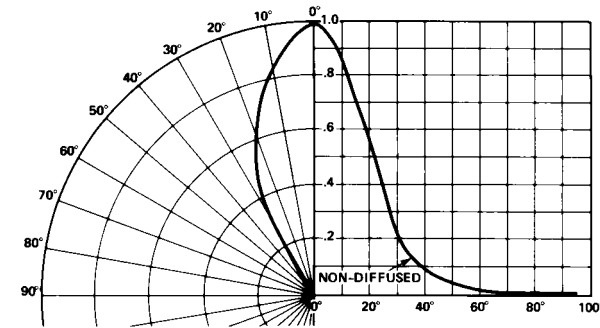


Figure 16. Relative Luminous Intensity vs. Angular Displacement.

Intensity Bin Limits

Color	Bin	Intensity Range (mcd)	
		Min.	Max.
Red	G	9.7	15.5
	H	15.5	24.8
	I	24.8	39.6
	J	39.6	63.4
	K	63.4	101.5
	L	101.5	162.4
	M	162.4	234.6
	N	234.6	340.0
	O	340.0	540.0
	P	540.0	850.0
	Q	850.0	1200.0
	R	1200.0	1700.0
	S	1700.0	2400.0
	T	2400.0	3400.0
	U	3400.0	4900.0
	V	4900.0	7100.0
	W	7100.0	10200.0
	X	10200.0	14800.0
	Y	14800.0	21400.0
	Z	21400.0	30900.0
Yellow	F	10.3	16.6
	G	16.6	26.5
	H	26.5	42.3
	I	42.3	67.7
	J	67.7	108.2
	K	108.2	173.2
	L	173.2	250.0
	M	250.0	360.0
	N	360.0	510.0
	O	510.0	800.0
	P	800.0	1250.0
	Q	1250.0	1800.0
	R	1800.0	2900.0
	S	2900.0	4700.0
	T	4700.0	7200.0
U	7200.0	11700.0	
V	11700.0	18000.0	
W	18000.0	27000.0	

Intensity Bin Limits, continued

Color	Bin	Intensity Range (mcd)	
		Min.	Max.
Green	E	7.6	12.0
	F	12.0	19.1
	G	19.1	30.7
	H	30.7	49.1
	I	49.1	78.5
	J	78.5	125.7
	K	125.7	201.1
	L	201.1	289.0
	M	289.0	417.0
	N	417.0	680.0
	O	680.0	1100.0
	P	1100.0	1800.0
	Q	1800.0	2700.0
	R	2700.0	4300.0
	S	4300.0	6800.0
	T	6800.0	10800.0
	U	10800.0	16000.0
	V	16000.0	25000.0
W	25000.0	40000.0	

Maximum tolerance for each bin limit is $\pm 18\%$.

Color Categories

Color	Category #	Lambda (nm)	
		Min.	Max.
Green	6	561.5	564.5
	5	564.5	567.5
	4	567.5	570.5
	3	570.5	573.5
	2	573.5	576.5
Yellow	1	582.0	584.5
	3	584.5	587.0
	2	587.0	589.5
	4	589.5	592.0
	5	592.0	593.0

Maximum tolerance for each bin limit is ± 0.5 nm.

Mechanical Option Matrix

Mechanical Option Code	Definition
00	Bulk Packaging, minimum increment 500 pcs/bag
01	Tape & Reel, crimped leads, minimum increment 1800 pcs/bag
02	Tape & Reel, straight leads, minimum increment 1800 pcs/bag
A1	Right Angle Housing, uneven leads, minimum increment 500 pcs/bag
A2	Right Angle Housing, even leads, minimum increment 500 pcs/bag

Note:

All categories are established for classification of products. Products may not be available in all categories. Please contact your local Agilent representative for further clarification/information.

Product Information and Literature

- [Events](#)
- [Guided Selection](#)
- [Library](#)
- [News Releases](#)
- [Order Information](#)
- [Partner Portal](#)
- [Product Index](#)

HLMP-1320-G0001

Preliminary Product Information

T-1 (3mm) High Intensity LED Lamp

FEATURES

- High Intensity
- Popular T-1 Diameter Package
- Selected Minimum Intensity
- Narrow Viewing Angle

DESCRIPTION

This T-1 lamp is specially designed for applications requiring higher on-axis intensity than is achievable with a standard lamp. The light generated is focused to a narrow beam to achieve this effect.

Product Data Sheets, Specification, and Performance Information

<input type="checkbox"/> Datasheet:	198 KB	Click	Click
HLMP-132x/142x/152x - T-1 (3 mm) High Intensity LED Lamps	pdf		

Application Information and Design Aids

<input type="checkbox"/> Application Brief:	63 KB	Click	Click
AB A03 - LED compatibility with automotive EMC transients	pdf		
<input type="checkbox"/> Application Brief:	60 KB	Click	Click
AB A05 - LED thermal testing	pdf		
<input type="checkbox"/> Application Brief:	42 KB	Click	Click
AB A02 - Benefits of LEDs for instrument cluster lighting	pdf		
<input type="checkbox"/> Application Brief:	255 KB	Click	Click
AB I-003 - Light guide techniques using LED lamps	pdf		
<input type="checkbox"/> Application Brief:	35 KB	Click	Click
AB I-002 - Thermal resistance values for LED lamps	pdf		
<input type="checkbox"/> Application Brief:	35 KB	Click	Click
AB I-012 - Temperature compensation circuit for constant LED intensity	pdf		
<input type="checkbox"/> Application Brief:	52 KB	Click	Click
AB A04: LED Lamp Thermal Properties	pdf		
<input type="checkbox"/> Application Note:	491 KB	Click	Click
AN 1027: Soldering LED Components	pdf		

[Add to my links](#)

[Keep me updated](#)

[Help downloading files](#)

Application Note: AN 1100 - Selecting LED lamps for automotive interior applications	163 KB pdf	Click	Click
Application Note: AN 1021 - Utilizing LED lamps packaged on tape and reel	229 KB pdf	Click	Click
Application Note: AN 1005 - Operational considerations for LED lamps and display devices	62 KB pdf	Click	Click

[Terms of Use](#)

[Privacy](#)

Product Information and Literature

- [Events](#)
- [Guided Selection](#)
- [Library](#)
- [News Releases](#)
- [Order Information](#)
- [Partner Portal](#)
- [Product Index](#)

HLMP-1320-G0002

Preliminary Product Information

T-1 (3mm) High Intensity LED Lamp

FEATURES

- High Intensity
- Popular T-1 Diameter Package
- Selected Minimum Intensity
- Narrow Viewing Angle

DESCRIPTION

This T-1 lamp is specially designed for applications requiring higher on-axis intensity than is achievable with a standard lamp. The light generated is focused to a narrow beam to achieve this effect.

Product Data Sheets, Specification, and Performance Information

<input type="checkbox"/> Datasheet:	198 KB	Click	Click
HLMP-132x/142x/152x - T-1 (3 mm) High Intensity LED Lamps	pdf		

Application Information and Design Aids

<input type="checkbox"/> Application Brief:	52 KB	Click	Click
AB A04: LED Lamp Thermal Properties	pdf		
<input type="checkbox"/> Application Brief:	60 KB	Click	Click
AB A05 - LED thermal testing	pdf		
<input type="checkbox"/> Application Brief:	63 KB	Click	Click
AB A03 - LED compatibility with automotive EMC transients	pdf		
<input type="checkbox"/> Application Brief:	255 KB	Click	Click
AB I-003 - Light guide techniques using LED lamps	pdf		
<input type="checkbox"/> Application Brief:	42 KB	Click	Click
AB A02 - Benefits of LEDs for instrument cluster lighting	pdf		
<input type="checkbox"/> Application Brief:	35 KB	Click	Click
AB I-002 - Thermal resistance values for LED lamps	pdf		
<input type="checkbox"/> Application Brief:	35 KB	Click	Click
AB I-012 - Temperature compensation circuit for constant LED intensity	pdf		
<input type="checkbox"/> Application Brief:	38 KB	Click	Click
AB 74 - Auto insertion of option 002 tape and reel LED lamps	pdf		

Application Note: AN 1027: Soldering LED Components	491 KB pdf	Click	Click
Application Note: AN 1100 - Selecting LED lamps for automotive interior applications	163 KB pdf	Click	

Product Information and Literature

- [Events](#)
- [Guided Selection](#)
- [Library](#)
- [News Releases](#)
- [Order Information](#)
- [Partner Portal](#)
- [Product Index](#)

HLMP-1320-G00A2

This Product is Market Released

T-1 (3mm) High Intensity LED Lamp

FEATURES

- High Intensity
- Popular T-1 Diameter Package
- Selected Minimum Intensity
- Narrow Viewing Angle

APPLICATIONS

DESCRIPTION

This T-1 lamp is specially designed for applications requiring higher on-axis intensity than is achievable with a standard lamp. The light generated is focused to a narrow beam to achieve this effect.

Product Data Sheets, Specification, and Performance Information

<input type="checkbox"/> Datasheet:	198 KB	Click	Click
	HLMP-132x/142x/152x - T-1 (3 mm) High Intensity LED Lamps		
	pdf		













Application Information and Design Aids

<input type="checkbox"/> Application Brief:	42 KB	Click	Click
	AB A02 - Benefits of LEDs for instrument cluster lighting		
	pdf		
<input type="checkbox"/> Application Brief:	35 KB	Click	Click
	AB I-002 - Thermal resistance values for LED lamps		
	pdf		
<input type="checkbox"/> Application Brief:	60 KB	Click	Click
	AB A05 - LED thermal testing		
	pdf		
<input type="checkbox"/> Application Brief:	38 KB	Click	Click
	AB 74 - Auto insertion of option 002 tape and reel LED lamps		
	pdf		
<input type="checkbox"/> Application Brief:	52 KB	Click	Click
	AB A04: LED Lamp Thermal Properties		
	pdf		
<input type="checkbox"/> Application Brief:	35 KB	Click	Click
	AB I-012 - Temperature compensation circuit for constant LED intensity		
	pdf		
<input type="checkbox"/> Application Brief:	63 KB	Click	Click
	AB A03 - LED compatibility with automotive EMC transients		
	pdf		

[Click](#) Add to my links

[Click](#) Keep me updated

[Click](#) Help downloading files

 Application Brief: AB I-003 - Light guide techniques using LED lamps	255 KB pdf		
 Application Note: AN 1027: Soldering LED Components	491 KB pdf		
 Application Note: AN 1005 - Operational considerations for LED lamps and display devices	62 KB pdf		
 Application Note: AN 1100 - Selecting LED lamps for automotive interior applications	163 KB pdf		

[Terms of Use](#)

[Privacy](#)

Product Information and Literature

- [Events](#)
- [Guided Selection](#)
- [Library](#)
- [News Releases](#)
- [Order Information](#)
- [Partner Portal](#)
- [Product Index](#)

HLMP-1320-GH000

This Product is Market Released

T-1 (3mm) High Intensity LED Lamp

FEATURES

- High Intensity
- Popular T-1 Diameter Package
- Selected Minimum Intensity
- Narrow Viewing Angle

APPLICATIONS

DESCRIPTION

This T-1 lamp is specially designed for applications requiring higher on-axis intensity than is achievable with a standard lamp. The light generated is focused to a narrow beam to achieve this effect.

Product Data Sheets, Specification, and Performance Information

<input type="checkbox"/> Datasheet:	198 KB	Click	Click
HLMP-132x/142x/152x - T-1 (3 mm) High Intensity LED Lamps	pdf		

Application Information and Design Aids

<input type="checkbox"/> Application Brief:	42 KB	Click	Click
AB A02 - Benefits of LEDs for instrument cluster lighting	pdf		
<input type="checkbox"/> Application Brief:	35 KB	Click	Click
AB I-002 - Thermal resistance values for LED lamps	pdf		
<input type="checkbox"/> Application Brief:	60 KB	Click	Click
AB A05 - LED thermal testing	pdf		
<input type="checkbox"/> Application Brief:	255 KB	Click	Click
AB I-003 - Light guide techniques using LED lamps	pdf		
<input type="checkbox"/> Application Brief:	52 KB	Click	Click
AB A04: LED Lamp Thermal Properties	pdf		
<input type="checkbox"/> Application Brief:	35 KB	Click	Click
AB I-012 - Temperature compensation circuit for constant LED intensity	pdf		
<input type="checkbox"/> Application Brief:	63 KB	Click	Click
AB A03 - LED compatibility with automotive EMC transients	pdf		

[Add to my links](#)

[Keep me updated](#)

[Help downloading files](#)

Application Note: <u>AN 1027: Soldering LED Components</u>	491 KB pdf	Click	Click
Application Note: <u>AN 1100 - Selecting LED lamps for automotive interior applications</u>	163 KB pdf	Click	Click
Application Note: <u>AN 1031- Achieving Uniform Front Panel Appearance using 2 Intensity Bin Select Option for LED Devices</u>	100 KB pdf	Click	Click
Application Note: <u>AN 1005 - Operational considerations for LED lamps and display devices</u>	62 KB pdf	Click	Click

[Terms of Use](#)

[Privacy](#)

Home > [Products & Services](#) > [Semiconductor Products Home](#) > [LED Design Center](#) > Product Information and Literature

Product Information and Literature

- [Events](#)
- [Guided Selection](#)
- [Library](#)
- [News Releases](#)
- [Order Information](#)
- [Partner Portal](#)
- [Product Index](#)

HLMP-1321-G00A1

This Product is Market Released

T-1 (3mm) High Intensity LED Lamp

FEATURES

- High Intensity
- High Efficiency Red in Popular T1 Diameter Package
- Selected Minimum Intensities
- Narrow Viewing Angle
- General Purpose Leads
- Reliable and Rugged
- Available in Right Angle Housing

APPLICATIONS

DESCRIPTION

This T-1 lamp is specially designed for applications requiring higher on-axis intensity than is achievable with a standard lamp. The light generated is focused to a narrow beam to achieve this effect.

Product Data Sheets, Specification, and Performance Information

<input type="checkbox"/> Datasheet:	198	<input type="button" value="Click"/>	<input type="button" value="Click"/>
HLMP-132x/142x/152x - T-1 (3 mm) High Intensity LED Lamps	KB		
	pdf		

Application Information and Design Aids

<input type="checkbox"/> Application Note:	62 KB	<input type="button" value="Click"/>	<input type="button" value="Click"/>
AN 1005 - Operational considerations for LED lamps and display devices	pdf		

[Add to my links](#)

[Keep me updated](#)

[Help downloading files](#)

[Terms of Use](#)

[Privacy](#)

Product Information and Literature

- [Events](#)
- [Guided Selection](#)
- [Library](#)
- [News Releases](#)
- [Order Information](#)
- [Partner Portal](#)
- [Product Index](#)

HLMP-1321-HI000

This Product is Market Released

T-1 (3mm) High Intensity LED Lamp

FEATURES

- High Intensity
- High Efficiency Red in Popular T1 Diameter Package
- Selected Minimum Intensities
- Narrow Viewing Angle
- General Purpose Leads
- Reliable and Rugged
- Available in Bulk

APPLICATIONS

DESCRIPTION

This T-1 lamp is specially designed for applications requiring higher on-axis intensity than is achievable with a standard lamp. The light generated is focused to a narrow beam to achieve this effect.

Product Data Sheets, Specification, and Performance Information

<input type="checkbox"/> Datasheet:	198 KB	Click	Click
	HLMP-132x/142x/152x - T-1 (3 mm) High Intensity LED Lamps		
	pdf		

Application Information and Design Aids

<input type="checkbox"/> Application Note:	62 KB	Click	Click
	AN 1005 - Operational considerations for LED lamps and display devices		
	pdf		
<input type="checkbox"/> Application Note:	100 KB	Click	Click
	AN 1031- Achieving Uniform Front Panel Appearance using 2 Intensity Bin Select Option for LED Devices		
	pdf		

[Click](#) [Add to my links](#)

[Click](#) [Keep me updated](#)

[Click](#) [Help downloading files](#)

[Terms of Use](#)

[Privacy](#)

Product Information and Literature

- [Events](#)
- [Guided Selection](#)
- [Library](#)
- [News Releases](#)
- [Order Information](#)
- [Partner Portal](#)
- [Product Index](#)

HLMP-1420-F0002

Preliminary Product Information

T-1 (3mm) High Intensity LED Lamp

FEATURES

- High Intensity
- Popular T-1 Diameter Package
- Selected Minimum Intensity
- Narrow Viewing Angle

DESCRIPTION

This T-1 lamp is specially designed for applications requiring higher on-axis intensity than is achievable with a standard lamp. The light generated is focused to a narrow beam to achieve this effect.

Product Data Sheets, Specification, and Performance Information

<input type="checkbox"/> Datasheet:	198 KB	Click	Click
HLMP-132x/142x/152x - T-1 (3 mm) High Intensity LED Lamps	pdf		













Application Information and Design Aids

<input type="checkbox"/> Application Brief:	52 KB	Click	Click
AB A04: LED Lamp Thermal Properties	pdf		
<input type="checkbox"/> Application Brief:	60 KB	Click	Click
AB A05 - LED thermal testing	pdf		
<input type="checkbox"/> Application Brief:	63 KB	Click	Click
AB A03 - LED compatibility with automotive EMC transients	pdf		
<input type="checkbox"/> Application Brief:	255 KB	Click	Click
AB I-003 - Light guide techniques using LED lamps	pdf		
<input type="checkbox"/> Application Brief:	42 KB	Click	Click
AB A02 - Benefits of LEDs for instrument cluster lighting	pdf		
<input type="checkbox"/> Application Brief:	35 KB	Click	Click
AB I-002 - Thermal resistance values for LED lamps	pdf		
<input type="checkbox"/> Application Brief:	35 KB	Click	Click
AB I-012 - Temperature compensation circuit for constant LED intensity	pdf		
<input type="checkbox"/> Application Brief:	38 KB	Click	Click
AB 74 - Auto insertion of option 002 tape and reel LED lamps	pdf		

[Add to my links](#)

[Keep me updated](#)

[Help downloading files](#)

 Application Note: AN 1027: Soldering LED Components	491 KB pdf		
 Application Note: AN 1100 - Selecting LED lamps for automotive interior applications	163 KB pdf		
 Application Note: AN 1021 - Utilizing LED lamps packaged on tape and reel	229 KB pdf		
 Application Note: AN 1005 - Operational considerations for LED lamps and display devices	62 KB pdf		

[Terms of Use](#)

[Privacy](#)

Product Information and Literature

- [Events](#)
- [Guided Selection](#)
- [Library](#)
- [News Releases](#)
- [Order Information](#)
- [Partner Portal](#)
- [Product Index](#)

HLMP-1420-F00A1

This Product is Market Released

T-1 (3mm) High Intensity LED Lamp

FEATURES

- High Intensity
- Popular T-1 Diameter Package
- Selected Minimum Intensity
- Narrow Viewing Angle

DESCRIPTION

This T-1 lamp is specially designed for applications requiring higher on-axis intensity than is achievable with a standard lamp. The light generated is focused to a narrow beam to achieve this effect.

Product Data Sheets, Specification, and Performance Information

<input type="checkbox"/> Datasheet:	198 KB pdf	Click	Click
	HLMP-132x/142x/152x - T-1 (3 mm) High Intensity LED Lamps		

Application Information and Design Aids

<input type="checkbox"/> Application Brief:	60 KB pdf	Click	Click
	AB A05 - LED thermal testing		
<input type="checkbox"/> Application Brief:	63 KB pdf	Click	Click
	AB A03 - LED compatibility with automotive EMC transients		
<input type="checkbox"/> Application Brief:	52 KB pdf	Click	Click
	AB A04: LED Lamp Thermal Properties		
<input type="checkbox"/> Application Brief:	35 KB pdf	Click	Click
	AB I-002 - Thermal resistance values for LED lamps		
<input type="checkbox"/> Application Brief:	35 KB pdf	Click	Click
	AB I-012 - Temperature compensation circuit for constant LED intensity		
<input type="checkbox"/> Application Brief:	255 KB pdf	Click	Click
	AB I-003 - Light guide techniques using LED lamps		
<input type="checkbox"/> Application Brief:	42 KB pdf	Click	Click
	AB A02 - Benefits of LEDs for instrument cluster lighting		
<input type="checkbox"/> Application Note:	491 KB pdf	Click	Click
	AN 1027: Soldering LED Components		

[Add to my links](#)

[Keep me updated](#)

[Help downloading files](#)

- Application Note: [AN 1100 - Selecting LED lamps for automotive interior applications](#) 163 KB pdf [Click](#) [Click](#)
- Application Note: [AN 1005 - Operational considerations for LED lamps and display devices](#) 62 KB pdf [Click](#) [Click](#)

[Terms of Use](#)

[Privacy](#)

Product Information and Literature

- [Events](#)
- [Guided Selection](#)
- [Library](#)
- [News Releases](#)
- [Order Information](#)
- [Partner Portal](#)
- [Product Index](#)

HLMP-1520-E0001

Preliminary Product Information

T-1 (3mm) High Intensity LED Lamp

FEATURES

- High Intensity
- Popular T-1 Diameter Package
- Selected Minimum Intensity
- Narrow Viewing Angle

DESCRIPTION

This T-1 lamp is specially designed for applications requiring higher on-axis intensity than is achievable with a standard lamp. The light generated is focused to a narrow beam to achieve this effect.

Product Data Sheets, Specification, and Performance Information

<input type="checkbox"/> Datasheet:	198 KB	Click	Click
HLMP-132x/142x/152x - T-1 (3 mm) High Intensity LED Lamps	pdf		

Application Information and Design Aids

<input type="checkbox"/> Application Brief:	63 KB	Click	Click
AB A03 - LED compatibility with automotive EMC transients	pdf		
<input type="checkbox"/> Application Brief:	60 KB	Click	Click
AB A05 - LED thermal testing	pdf		
<input type="checkbox"/> Application Brief:	42 KB	Click	Click
AB A02 - Benefits of LEDs for instrument cluster lighting	pdf		
<input type="checkbox"/> Application Brief:	255 KB	Click	Click
AB I-003 - Light guide techniques using LED lamps	pdf		
<input type="checkbox"/> Application Brief:	35 KB	Click	Click
AB I-002 - Thermal resistance values for LED lamps	pdf		
<input type="checkbox"/> Application Brief:	35 KB	Click	Click
AB I-012 - Temperature compensation circuit for constant LED intensity	pdf		
<input type="checkbox"/> Application Brief:	52 KB	Click	Click
AB A04: LED Lamp Thermal Properties	pdf		
<input type="checkbox"/> Application Note:	491 KB	Click	Click
AN 1027: Soldering LED Components	pdf		

[Add to my links](#)

[Keep me updated](#)

[Help downloading files](#)

<input type="checkbox"/> Application Note: AN 1100 - Selecting LED lamps for automotive interior applications	163 KB pdf	Click	Click
<input type="checkbox"/> Application Note: AN 1021 - Utilizing LED lamps packaged on tape and reel	229 KB pdf	Click	Click
<input type="checkbox"/> Application Note: AN 1005 - Operational considerations for LED lamps and display devices	62 KB pdf	Click	Click

[Terms of Use](#)

[Privacy](#)

Product Information and Literature

- [Events](#)
- [Guided Selection](#)
- [Library](#)
- [News Releases](#)
- [Order Information](#)
- [Partner Portal](#)
- [Product Index](#)

HLMP-1520-E0002

Preliminary Product Information

T-1 (3mm) High Intensity LED Lamp

FEATURES

- High Intensity
- Popular T-1 Diameter Package
- Selected Minimum Intensity
- Narrow Viewing Angle

DESCRIPTION

This T-1 lamp is specially designed for applications requiring higher on-axis intensity than is achievable with a standard lamp. The light generated is focused to a narrow beam to achieve this effect.













Product Data Sheets, Specification, and Performance Information

<input type="checkbox"/> Datasheet:	198 KB	Click	Click
	HLMP-132x/142x/152x - T-1 (3 mm) High Intensity LED Lamps		
	pdf		

Application Information and Design Aids

<input type="checkbox"/> Application Brief:	52 KB	Click	Click
	AB A04: LED Lamp Thermal Properties		
	pdf		
<input type="checkbox"/> Application Brief:	60 KB	Click	Click
	AB A05 - LED thermal testing		
	pdf		
<input type="checkbox"/> Application Brief:	63 KB	Click	Click
	AB A03 - LED compatibility with automotive EMC transients		
	pdf		
<input type="checkbox"/> Application Brief:	255 KB	Click	Click
	AB I-003 - Light guide techniques using LED lamps		
	pdf		
<input type="checkbox"/> Application Brief:	42 KB	Click	Click
	AB A02 - Benefits of LEDs for instrument cluster lighting		
	pdf		
<input type="checkbox"/> Application Brief:	35 KB	Click	Click
	AB I-002 - Thermal resistance values for LED lamps		
	pdf		
<input type="checkbox"/> Application Brief:	35 KB	Click	Click
	AB I-012 - Temperature compensation circuit for constant LED intensity		
	pdf		
<input type="checkbox"/> Application Brief:	38 KB	Click	Click
	AB 74 - Auto insertion of option 002 tape and reel LED lamps		
	pdf		

- [Add to my links](#)
- [Keep me updated](#)
- [Help downloading files](#)

 Application Note: AN 1027: Soldering LED Components	491 KB pdf		
 Application Note: AN 1100 - Selecting LED lamps for automotive interior applications	163 KB pdf		
 Application Note: AN 1021 - Utilizing LED lamps packaged on tape and reel	229 KB pdf		
 Application Note: AN 1005 - Operational considerations for LED lamps and display devices	62 KB pdf		

[Terms of Use](#)

[Privacy](#)

Product Information and Literature

- [Events](#)
- [Guided Selection](#)
- [Library](#)
- [News Releases](#)
- [Order Information](#)
- [Partner Portal](#)
- [Product Index](#)

HLMP-1520-E00A1

This Product is Market Released

T-1 (3mm) High Intensity LED Lamp

FEATURES

- High Intensity
- Popular T-1 Diameter Package
- Selected Minimum Intensity
- Narrow Viewing Angle

DESCRIPTION

This T-1 lamp is specially designed for applications requiring higher on-axis intensity than is achievable with a standard lamp. The light generated is focused to a narrow beam to achieve this effect.

Product Data Sheets, Specification, and Performance Information

<input type="checkbox"/> Datasheet:	198 KB pdf	Click	Click
	HLMP-132x/142x/152x - T-1 (3 mm) High Intensity LED Lamps		

Application Information and Design Aids

<input type="checkbox"/> Application Brief:	60 KB pdf	Click	Click
	AB A05 - LED thermal testing		
<input type="checkbox"/> Application Brief:	63 KB pdf	Click	Click
	AB A03 - LED compatibility with automotive EMC transients		
<input type="checkbox"/> Application Brief:	52 KB pdf	Click	Click
	AB A04: LED Lamp Thermal Properties		
<input type="checkbox"/> Application Brief:	35 KB pdf	Click	Click
	AB I-002 - Thermal resistance values for LED lamps		
<input type="checkbox"/> Application Brief:	35 KB pdf	Click	Click
	AB I-012 - Temperature compensation circuit for constant LED intensity		
<input type="checkbox"/> Application Brief:	255 KB pdf	Click	Click
	AB I-003 - Light guide techniques using LED lamps		
<input type="checkbox"/> Application Brief:	42 KB pdf	Click	Click
	AB A02 - Benefits of LEDs for instrument cluster lighting		
<input type="checkbox"/> Application Note:	491 KB pdf	Click	Click
	AN 1027: Soldering LED Components		

- [Add to my links](#)
- [Keep me updated](#)
- [Help downloading files](#)

- Application Note: 163 KB [Click](#) [Click](#)
[AN 1100 - Selecting LED lamps for automotive interior applications](#) pdf
- Application Note: 62 KB [Click](#) [Click](#)
[AN 1005 - Operational considerations for LED lamps and display devices](#) pdf

[Terms of Use](#)

[Privacy](#)

Product Information and Literature

- [Events](#)
- [Guided Selection](#)
- [Library](#)
- [News Releases](#)
- [Order Information](#)
- [Partner Portal](#)
- [Product Index](#)

HLMP-1520-E00A2

This Product is Market Released

T-1 (3mm) High Intensity LED Lamp

FEATURES

- High Intensity
- Popular T-1 Diameter Package
- Selected Minimum Intensity
- Narrow Viewing Angle

DESCRIPTION

This T-1 lamp is specially designed for applications requiring higher on-axis intensity than is achievable with a standard lamp. The light generated is focused to a narrow beam to achieve this effect.

Product Data Sheets, Specification, and Performance Information

<input type="checkbox"/> Datasheet:	198 KB	Click	Click
	HLMP-132x/142x/152x - T-1 (3 mm) High Intensity LED Lamps		
	pdf		

Application Information and Design Aids

<input type="checkbox"/> Application Brief:	60 KB	Click	Click
	AB A05 - LED thermal testing		
	pdf		
<input type="checkbox"/> Application Brief:	63 KB	Click	Click
	AB A03 - LED compatibility with automotive EMC transients		
	pdf		
<input type="checkbox"/> Application Brief:	52 KB	Click	Click
	AB A04: LED Lamp Thermal Properties		
	pdf		
<input type="checkbox"/> Application Brief:	35 KB	Click	Click
	AB I-002 - Thermal resistance values for LED lamps		
	pdf		
<input type="checkbox"/> Application Brief:	35 KB	Click	Click
	AB I-012 - Temperature compensation circuit for constant LED intensity		
	pdf		
<input type="checkbox"/> Application Brief:	255 KB	Click	Click
	AB I-003 - Light guide techniques using LED lamps		
	pdf		
<input type="checkbox"/> Application Brief:	42 KB	Click	Click
	AB A02 - Benefits of LEDs for instrument cluster lighting		
	pdf		
<input type="checkbox"/> Application Note:	491 KB	Click	Click
	AN 1027: Soldering LED Components		
	pdf		

- [Add to my links](#)
- [Keep me updated](#)
- [Help downloading files](#)

- Application Note: 163 KB [Click](#) [Click](#)
[AN 1100 - Selecting LED lamps for automotive interior applications](#) pdf
- Application Note: 62 KB [Click](#) [Click](#)
[AN 1005 - Operational considerations for LED lamps and display devices](#) pdf

[Terms of Use](#)

[Privacy](#)

Product Information and Literature

- [Events](#)
- [Guided Selection](#)
- [Library](#)
- [News Releases](#)
- [Order Information](#)
- [Partner Portal](#)
- [Product Index](#)

HLMP-1521-E0001

Preliminary Product Information

T-1 (3mm) High Intensity LED Lamp

FEATURES

- High Intensity
- Popular T-1 Diameter Package
- Selected Minimum Intensity
- Narrow Viewing Angle

DESCRIPTION

This T-1 lamp is specially designed for applications requiring higher on-axis intensity than is achievable with a standard lamp. The light generated is focused to a narrow beam to achieve this effect.

Product Data Sheets, Specification, and Performance Information

<input type="checkbox"/> Datasheet:	198 KB pdf	Click	Click
HLMP-132x/142x/152x - T-1 (3 mm) High Intensity LED Lamps			

Application Information and Design Aids

<input type="checkbox"/> Application Brief:	63 KB pdf	Click	Click
AB A03 - LED compatibility with automotive EMC transients			
<input type="checkbox"/> Application Brief:	60 KB pdf	Click	Click
AB A05 - LED thermal testing			
<input type="checkbox"/> Application Brief:	42 KB pdf	Click	Click
AB A02 - Benefits of LEDs for instrument cluster lighting			
<input type="checkbox"/> Application Brief:	255 KB pdf	Click	Click
AB I-003 - Light guide techniques using LED lamps			
<input type="checkbox"/> Application Brief:	35 KB pdf	Click	Click
AB I-002 - Thermal resistance values for LED lamps			
<input type="checkbox"/> Application Brief:	35 KB pdf	Click	Click
AB I-012 - Temperature compensation circuit for constant LED intensity			
<input type="checkbox"/> Application Brief:	52 KB pdf	Click	Click
AB A04: LED Lamp Thermal Properties			
<input type="checkbox"/> Application Note:	491 KB pdf	Click	Click
AN 1027: Soldering LED Components			

[Add to my links](#)

[Keep me updated](#)

[Help downloading files](#)

Application Note: AN 1100 - Selecting LED lamps for automotive interior applications	163 KB pdf	Click	Click
Application Note: AN 1021 - Utilizing LED lamps packaged on tape and reel	229 KB pdf	Click	Click
Application Note: AN 1005 - Operational considerations for LED lamps and display devices	62 KB pdf	Click	Click

[Terms of Use](#)

[Privacy](#)

Product Information and Literature

- [Events](#)
- [Guided Selection](#)
- [Library](#)
- [News Releases](#)
- [Order Information](#)
- [Partner Portal](#)
- [Product Index](#)

HLMP-1521-E0002

Preliminary Product Information

T-1 (3mm) High Intensity LED Lamp

FEATURES

- High Intensity
- Popular T-1 Diameter Package
- Selected Minimum Intensity
- Narrow Viewing Angle

DESCRIPTION

This T-1 lamp is specially designed for applications requiring higher on-axis intensity than is achievable with a standard lamp. The light generated is focused to a narrow beam to achieve this effect.

Product Data Sheets, Specification, and Performance Information

<input type="checkbox"/> Datasheet:	198 KB pdf	Click	Click
	HLMP-132x/142x/152x - T-1 (3 mm) High Intensity LED Lamps		













Application Information and Design Aids

<input type="checkbox"/> Application Brief:	52 KB pdf	Click	Click
	AB A04: LED Lamp Thermal Properties		
<input type="checkbox"/> Application Brief:	60 KB pdf	Click	Click
	AB A05 - LED thermal testing		
<input type="checkbox"/> Application Brief:	63 KB pdf	Click	Click
	AB A03 - LED compatibility with automotive EMC transients		
<input type="checkbox"/> Application Brief:	255 KB pdf	Click	Click
	AB I-003 - Light guide techniques using LED lamps		
<input type="checkbox"/> Application Brief:	42 KB pdf	Click	Click
	AB A02 - Benefits of LEDs for instrument cluster lighting		
<input type="checkbox"/> Application Brief:	35 KB pdf	Click	Click
	AB I-002 - Thermal resistance values for LED lamps		
<input type="checkbox"/> Application Brief:	35 KB pdf	Click	Click
	AB I-012 - Temperature compensation circuit for constant LED intensity		
<input type="checkbox"/> Application Brief:	38 KB pdf	Click	Click
	AB 74 - Auto insertion of option 002 tape and reel LED lamps		

[Add to my links](#)

[Keep me updated](#)

[Help downloading files](#)

 Application Note: AN 1027: Soldering LED Components	491 KB pdf		
 Application Note: AN 1100 - Selecting LED lamps for automotive interior applications	163 KB pdf		
 Application Note: AN 1021 - Utilizing LED lamps packaged on tape and reel	229 KB pdf		
 Application Note: AN 1005 - Operational considerations for LED lamps and display devices	62 KB pdf		

[Terms of Use](#)

[Privacy](#)

Product Information and Literature

- [Events](#)
- [Guided Selection](#)
- [Library](#)
- [News Releases](#)
- [Order Information](#)
- [Partner Portal](#)
- [Product Index](#)

HLMP-1521-E00A1

This Product is Market Released

T-1 (3mm) High Intensity LED Lamp

FEATURES

- High Intensity
- Popular T-1 Diameter Package
- Selected Minimum Intensity
- Narrow Viewing Angle

DESCRIPTION

This T-1 lamp is specially designed for applications requiring higher on-axis intensity than is achievable with a standard lamp. The light generated is focused to a narrow beam to achieve this effect.

Product Data Sheets, Specification, and Performance Information

<input type="checkbox"/> Datasheet:	198 KB pdf	Click	Click
	HLMP-132x/142x/152x - T-1 (3 mm) High Intensity LED Lamps		

Application Information and Design Aids

<input type="checkbox"/> Application Brief:	60 KB pdf	Click	Click
	AB A05 - LED thermal testing		
<input type="checkbox"/> Application Brief:	63 KB pdf	Click	Click
	AB A03 - LED compatibility with automotive EMC transients		
<input type="checkbox"/> Application Brief:	52 KB pdf	Click	Click
	AB A04: LED Lamp Thermal Properties		
<input type="checkbox"/> Application Brief:	35 KB pdf	Click	Click
	AB I-002 - Thermal resistance values for LED lamps		
<input type="checkbox"/> Application Brief:	35 KB pdf	Click	Click
	AB I-012 - Temperature compensation circuit for constant LED intensity		
<input type="checkbox"/> Application Brief:	255 KB pdf	Click	Click
	AB I-003 - Light guide techniques using LED lamps		
<input type="checkbox"/> Application Brief:	42 KB pdf	Click	Click
	AB A02 - Benefits of LEDs for instrument cluster lighting		
<input type="checkbox"/> Application Note:	491 KB pdf	Click	Click
	AN 1027: Soldering LED Components		

[Click](#) **Add to my links**

[Click](#) **Keep me updated**

[Click](#) **Help downloading files**

- Application Note: [AN 1100 - Selecting LED lamps for automotive interior applications](#) 163 KB pdf [Click](#) [Click](#)
- Application Note: [AN 1005 - Operational considerations for LED lamps and display devices](#) 62 KB pdf [Click](#) [Click](#)

[Terms of Use](#)

[Privacy](#)

Product Information and Literature

- [Events](#)
- [Guided Selection](#)
- [Library](#)
- [News Releases](#)
- [Order Information](#)
- [Partner Portal](#)
- [Product Index](#)

HLMP-1521-E00A2

This Product is Market Released

T-1 (3mm) High Intensity LED Lamp

FEATURES

- High Intensity
- Popular T-1 Diameter Package
- Selected Minimum Intensity
- Narrow Viewing Angle

DESCRIPTION

This T-1 lamp is specially designed for applications requiring higher on-axis intensity than is achievable with a standard lamp. The light generated is focused to a narrow beam to achieve this effect.

Product Data Sheets, Specification, and Performance Information

<input type="checkbox"/> Datasheet:	198 KB	Click	Click
	HLMP-132x/142x/152x - T-1 (3 mm) High Intensity LED Lamps		
	pdf		

Application Information and Design Aids

<input type="checkbox"/> Application Brief:	60 KB	Click	Click
	AB A05 - LED thermal testing		
	pdf		
<input type="checkbox"/> Application Brief:	63 KB	Click	Click
	AB A03 - LED compatibility with automotive EMC transients		
	pdf		
<input type="checkbox"/> Application Brief:	52 KB	Click	Click
	AB A04: LED Lamp Thermal Properties		
	pdf		
<input type="checkbox"/> Application Brief:	35 KB	Click	Click
	AB I-002 - Thermal resistance values for LED lamps		
	pdf		
<input type="checkbox"/> Application Brief:	35 KB	Click	Click
	AB I-012 - Temperature compensation circuit for constant LED intensity		
	pdf		
<input type="checkbox"/> Application Brief:	255 KB	Click	Click
	AB I-003 - Light guide techniques using LED lamps		
	pdf		
<input type="checkbox"/> Application Brief:	42 KB	Click	Click
	AB A02 - Benefits of LEDs for instrument cluster lighting		
	pdf		
<input type="checkbox"/> Application Note:	491 KB	Click	Click
	AN 1027: Soldering LED Components		
	pdf		

[Click](#) **Add to my links**

[Click](#) **Keep me updated**

[Click](#) **Help downloading files**

- Application Note: [AN 1100 - Selecting LED lamps for automotive interior applications](#) 163 KB pdf [Click](#) [Click](#)
- Application Note: [AN 1005 - Operational considerations for LED lamps and display devices](#) 62 KB pdf [Click](#) [Click](#)

[Terms of Use](#)

[Privacy](#)

Product Information and Literature

- [Events](#)
- [Guided Selection](#)
- [Library](#)
- [News Releases](#)
- [Order Information](#)
- [Partner Portal](#)
- [Product Index](#)

HLMP-1420-F00A2

This Product is Market Released

T-1 (3mm) High Intensity LED Lamp

FEATURES

- High Intensity
- Popular T-1 Diameter Package
- Selected Minimum Intensity
- Narrow Viewing Angle

DESCRIPTION

This T-1 lamp is specially designed for applications requiring higher on-axis intensity than is achievable with a standard lamp. The light generated is focused to a narrow beam to achieve this effect.

Product Data Sheets, Specification, and Performance Information

<input type="checkbox"/> Datasheet:	198 KB	Click	Click
HLMP-132x/142x/152x - T-1 (3 mm) High Intensity LED Lamps	pdf		

Application Information and Design Aids

<input type="checkbox"/> Application Brief:	60 KB	Click	Click
AB A05 - LED thermal testing	pdf		
<input type="checkbox"/> Application Brief:	63 KB	Click	Click
AB A03 - LED compatibility with automotive EMC transients	pdf		
<input type="checkbox"/> Application Brief:	52 KB	Click	Click
AB A04: LED Lamp Thermal Properties	pdf		
<input type="checkbox"/> Application Brief:	35 KB	Click	Click
AB I-002 - Thermal resistance values for LED lamps	pdf		
<input type="checkbox"/> Application Brief:	35 KB	Click	Click
AB I-012 - Temperature compensation circuit for constant LED intensity	pdf		
<input type="checkbox"/> Application Brief:	255 KB	Click	Click
AB I-003 - Light guide techniques using LED lamps	pdf		
<input type="checkbox"/> Application Brief:	42 KB	Click	Click
AB A02 - Benefits of LEDs for instrument cluster lighting	pdf		
<input type="checkbox"/> Application Note:	491 KB	Click	Click
AN 1027: Soldering LED Components	pdf		

[Add to my links](#)

[Keep me updated](#)

[Help downloading files](#)

- Application Note: [AN 1100 - Selecting LED lamps for automotive interior applications](#) 163 KB pdf [Click](#) [Click](#)
- Application Note: [AN 1005 - Operational considerations for LED lamps and display devices](#) 62 KB pdf [Click](#) [Click](#)

[Terms of Use](#)

[Privacy](#)