


2.0A Surface Mount Schottky Rectifier

Features

- Mini-SMA Package for Surface Mounted Applications
- Low Leakage Current, High Efficiency
- Epoxy Molding Compound has UL Flammability Classification 94V-0
- RoHS Compliance



MFP



Mechanical Data

Case:	MFP / MINI-SMA, Molded plastic body
Terminals:	Solder plated, solderable per MIL-STD-750, Method 2026
Polarity:	Indicated by cathode band
Mounting Position:	Any
Weight:	0.04 gram





Maximum Ratings and Electrical Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Description	MFPS 22S	MFPS 23S	MFPS 24S	MFPS 25S	MFPS 26S	MFPS 28S	MFPS 210S	Unit	Conditions
V_{RRM}	Max. Repetitive Peak Reverse Voltage	20	30	40	50	60	80	100	V	
V_{RMS}	Max. RMS Voltage	14	21	28	35	42	56	70	V	
I_{F(AV)}	Average Forward Rectified Current	2.0							A	See Fig.1
I_{FSM}	Peak Forward Surge Current	50							A	
V_F	Max. Forward Voltage	0.5		0.7		0.85		V	I _F =2.0A	
I_R	Reverse Current @ V _R = V _{RRM}	0.5							mA	T _A =25°C
		10							mA	T _A =125°C
R_{thJA}	Thermal Resistance	85							°C / W	Junction to ambient
C_J	Diode Junction Capacitance	160							pF	V _R = 4V, f=1MHz
T_J,T_{STG}	Operating Junction and Storage Temperature Range	-55 to +125			-55 to +150				°C	

2.0A Surface Mount Schottky Rectifier

MFPS22S - MFPS210S


Typical Characteristics Curves

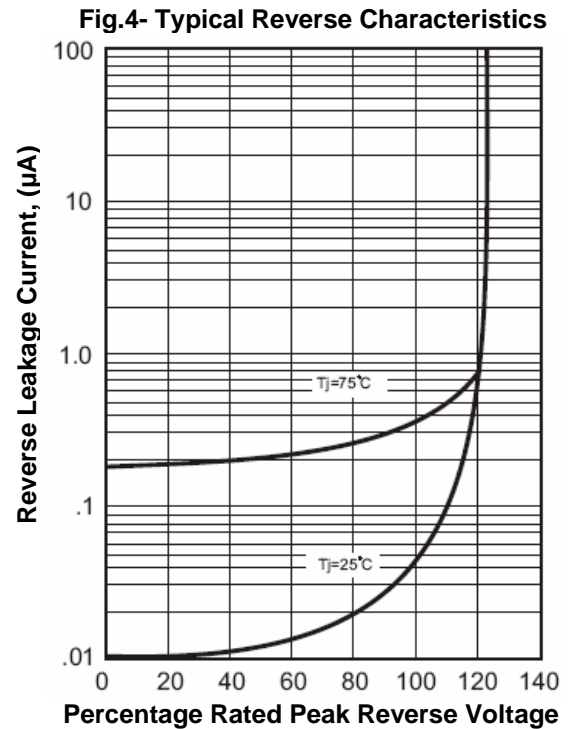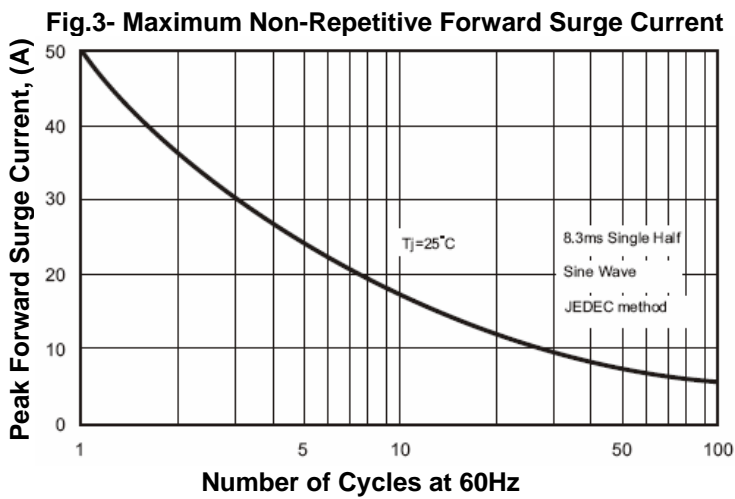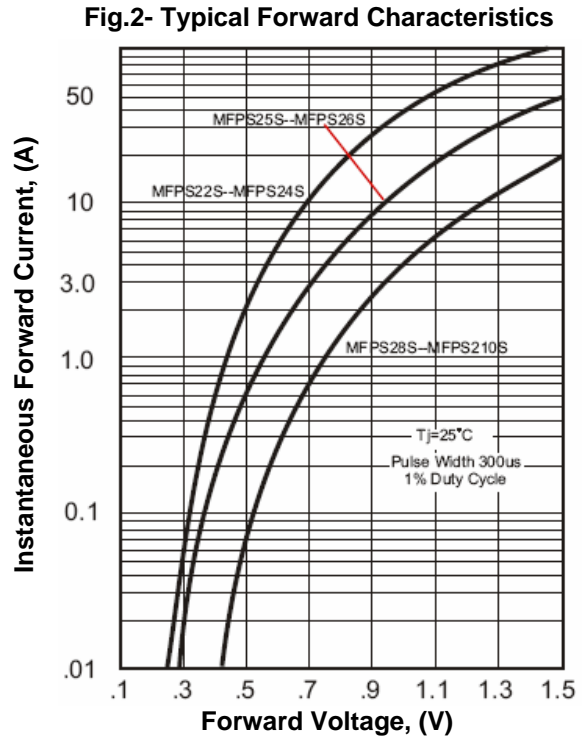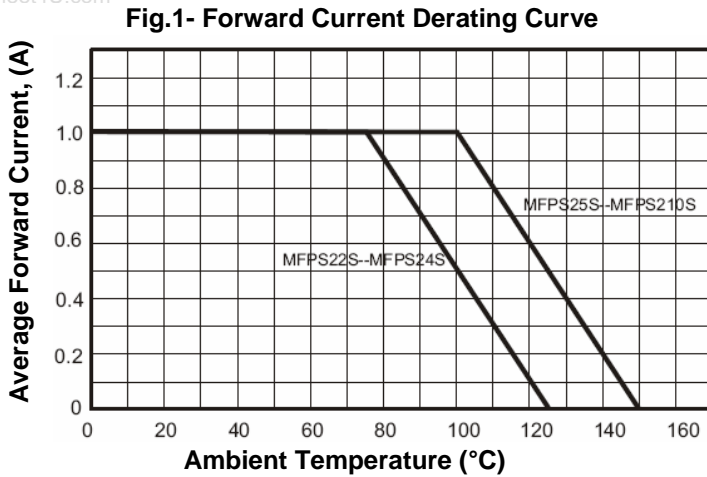


2.0A Surface Mount Schottky Rectifier

MFPS22S - MFPS210S

Fig.5-Typical Junction Capacitance

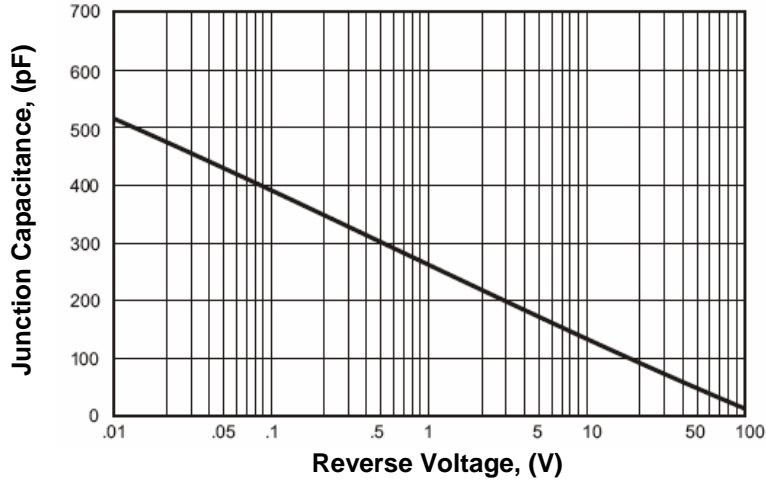

Dimensions in inches (mm)

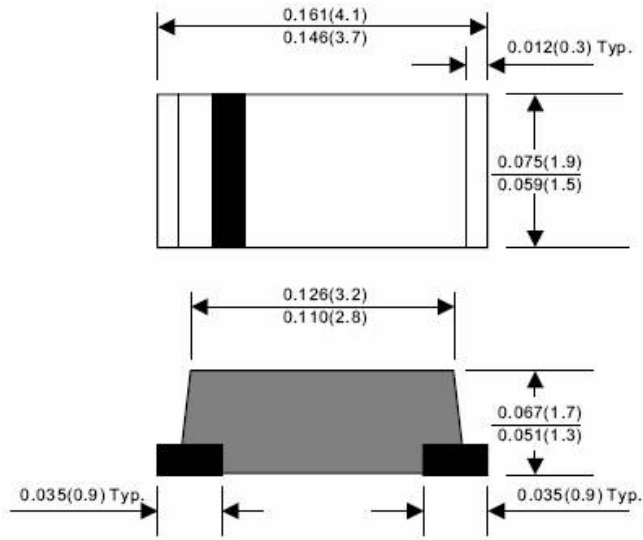

MFP

2.0A Surface Mount Schottky Rectifier

MFPS22S - MFPS210S

www.DataSheet4U.com

How to contact us:

US HEADQUARTERS

28040 WEST HARRISON PARKWAY, VALENCIA, CA 91355-4162

Tel: (800) TAITRON (800) 824-8766 (661) 257-6060

Fax: (800) TAITFAX (800) 824-8329 (661) 257-6415

Email: taitron@taitroncomponents.com

Http://www.taitroncomponents.com

TAITRON COMPONENTS MEXICO, S.A .DE C.V.

BOULEVARD CENTRAL 5000 INTERIOR 5 PARQUE INDUSTRIAL ATITALAQUIA, HIDALGO C.P.

42970 MEXICO

Tel: +52-55-5560-1519

Fax: +52-55-5560-2190

TAITRON COMPONENTS INCORPORATED REPRESENTAÇÕES DO BRASIL LTDA

RUA DOMINGOS DE MORAIS, 2777, 2.ANDAR, SALA 24 SAÚDE - SÃO PAULO-SP 04035-001 BRAZIL

Tel: +55-11-5574-7949

Fax: +55-11-5572-0052

TAITRON COMPONENTS INCORPORATED, SHANGHAI REPRESENTATIVE OFFICE

METROBANK PLAZA, 1160 WEST YAN' AN ROAD, SUITE 1503, SHANGHAI, 200052, CHINA

Tel: +86-21-5424-9942

Fax: +86-21-5424-9931