



DIMENSIONS mm (inches)

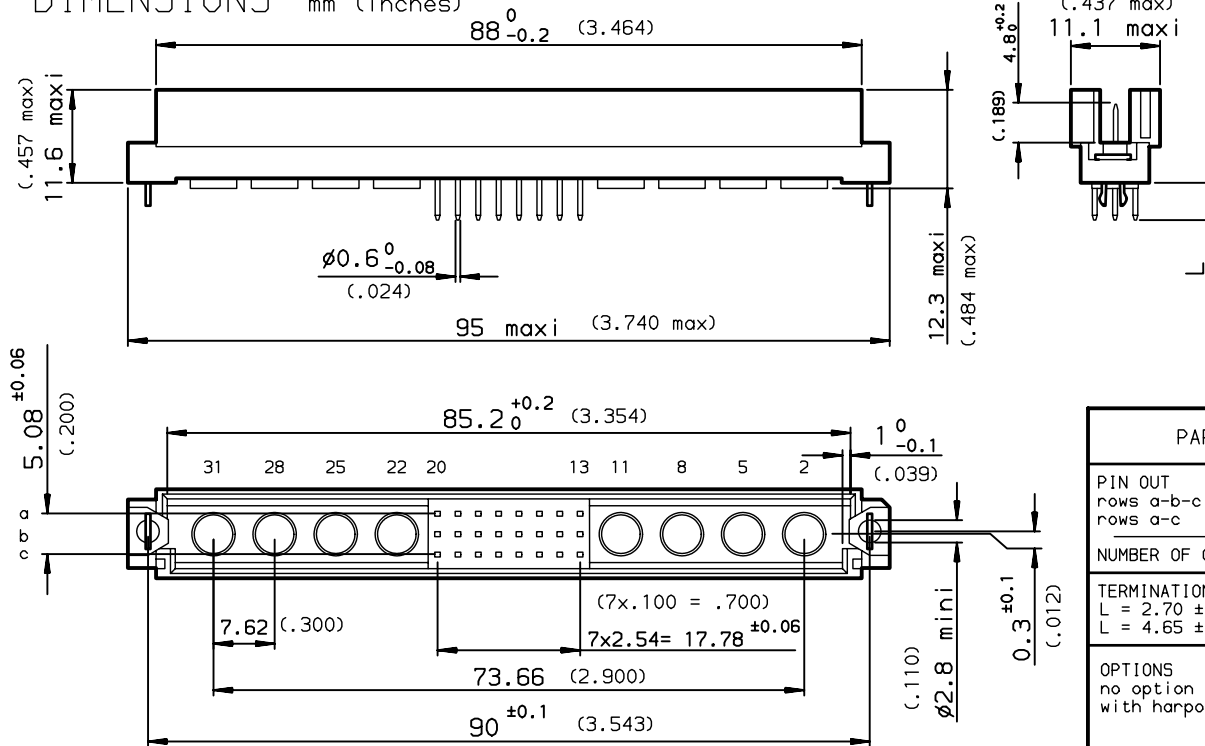

PART NUMBER	8609			G8				5	
PIN OUT									
rows a-b-c	3 24								
rows a-c	4 16								
NUMBER OF CONTACTS									
TERMINATION									
L = 2.70 ±0.25 (0.106)	- 24								
L = 4.65 ±0.25 (0.183)	- 14								
OPTIONS									
no option	7 HAR								
with harpoons	- for PCB thickness 1.6 mm								
	- for PCB thickness 2.4 mm								
	- for PCB thickness 3.2 mm								
PERFORMANCE CLASS									
DIN 41612 class 3	4								
DIN 41612 class 2	5								
DIN 41612 class 1	6								
TERMINATION TYPE									
TIN LEAD	000E1								
LEAD FREE	E1LF								

PCB DRILLING

component side

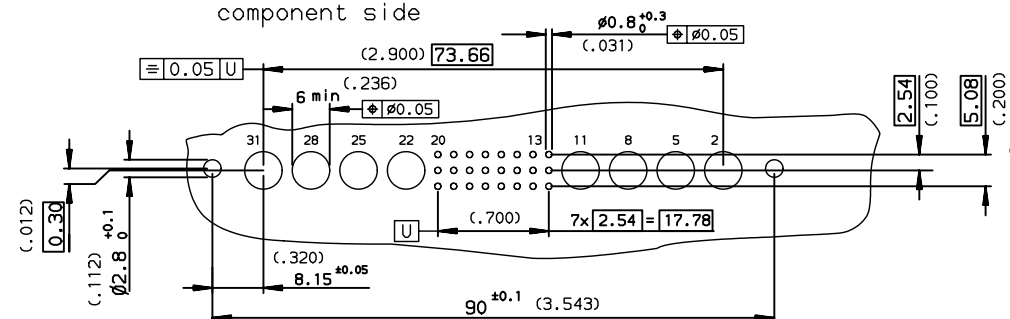

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C-8609-0000A

European Views

www.fciconnect.com		surface ISO 1302	tolerance std ISO 406 ISO 1101	projection mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED		
Dr	ROUILLARD	1996/02/22	0.X	±0.1
Eng	TARON	1996/02/22	0.XX	±0.1
Chr	LEGARE	1996/02/22	0.XX' ±2"	±0.1
Appr	LEGARE	1996/02/22	Product family	DIN 8609
		Spec ref		-
title		STRAIGHT MALE WITH SPECIAL CONTACTS		Scale
SOLDER TO BOARD		C-8609-0505		1.5
catalog no		CUSTOMER		sheet 1 of 1

rev	ecn no	dr	date
A	-	-	1996/02/22
B	LS05-001	JTA	2005/03/01
C	LS06-0095	LGO	2006/06/26
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-