


1.25mm Pitch

Series 6216




LIF Straight Through-Hole High Pin Count

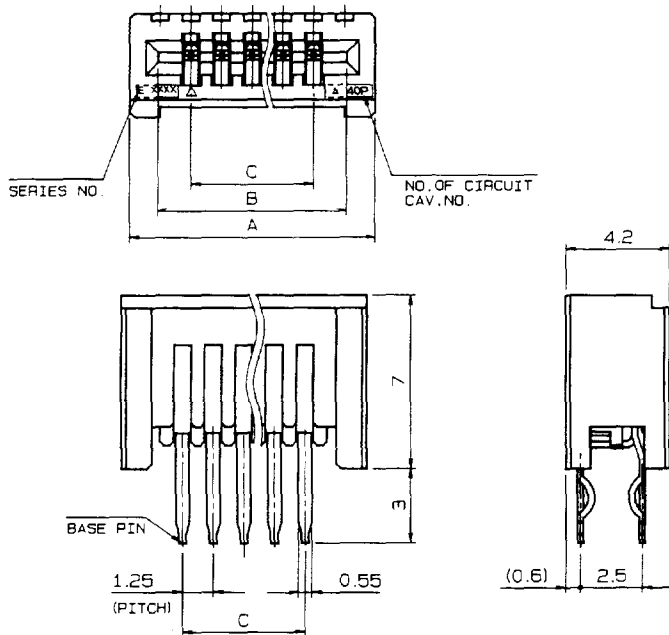


Specifications


- Number of Contacts – 4-40
- Tube Packaged or Tray Packaged
- Voltage – 200 V
- Current Rating – 1.0 amp max.
- Dielectric Withstanding Voltage – 500V RMS min.
- Operating Temperature – (-20°C - +85°C)
- Contact Material – phosphor bronze (tin-lead plated)
- Insulator Material – glass-filled PBT, (UL 94 V-O) black color
- FFC/FPC Thickness – 0.3 ± 0.05 mm (0.012 ± 0.002 ")
- PCB Thickness – 1.0-1.6mm (0.039-0.633")
- Profile Height – Straight – 7.0mm (0.276")
Right Angle – 4.2mm (0.165")
- Reverse footprint for straight type also available – contact sales office for details

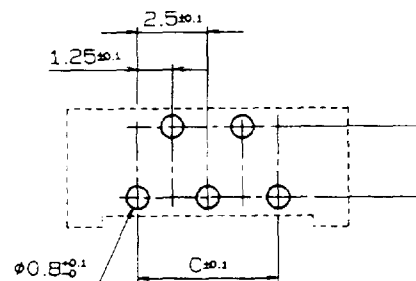

MOUNTING LAYOUT (t=1~1.6mm)

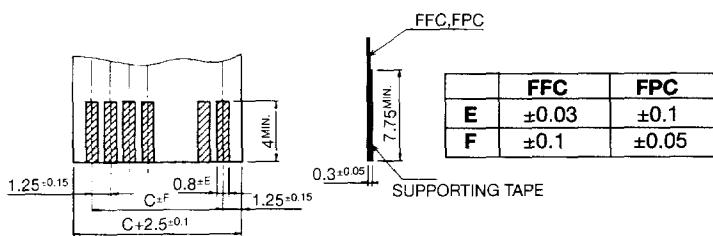

FFC, FPC SPECIFICATION

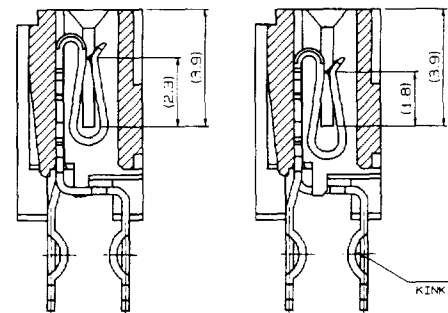

LONG CONTACT (ODD PIN)

SHORT CONTACT (EVEN PIN)

PART NUMBER	NO. OF CONTACTS	A	B	C	QTY. PER TRAY
00 6216 131 82X 808	31	42.50	40.16	37.50	80
132	32	43.75	41.41	38.75	80
133	33	45.00	42.66	40.00	80
134	34	46.25	43.91	41.25	70
135	35	47.50	45.16	42.50	70
136	36	48.75	46.41	43.75	70
137	37	50.00	47.66	45.00	70
138	38	51.25	48.91	46.25	70
139	39	52.50	50.16	47.50	60
00 6216 140 82X 808	40	53.75	51.41	48.75	60

(Dimensions: mm)

ORDERING CODE

00 6216 1XX 82X 808

NUMBER OF CONTACTS (31-40)
TRAY PACKAGE

VARIATION CODE
0: WITH KINKED LEGS
(EACH TWO PINS AT BOTH ENDS)
1: WITHOUT KINKED LEGS