


Power Relay K (Open – Sealed)

- Limiting continuous current 45A
- Wide voltage range
- 24VDC coil versions available
- For high current version refer to Power Relay K-S

Typical applications

ABS control, blower fans, car alarm, cooling fan, engine control, fuel pump, hazard warning signal, heated front screen, heated rear screen, ignition, lamps front/rear/fog light, interior lights, main switch/supply relay, seat control, seatbelt pretensioner, sun roof, turn signal, valves, window lifter, wiper control.

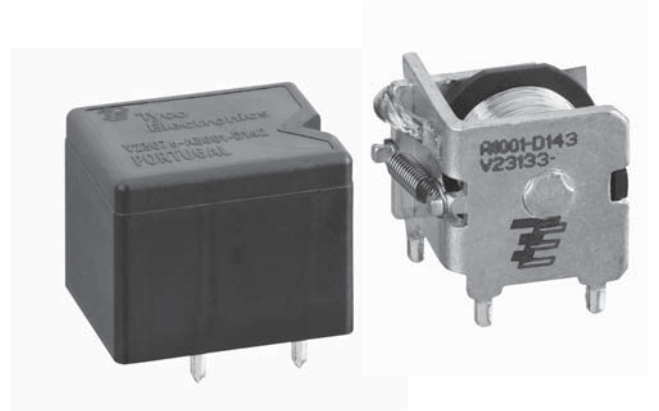


Contact Data

Typical applications	Resistive/inductive loads	Resistive/inductive loads	Indicator lamps	Headlights, capacitive loads	Headlights capacitive loads
Contact arrangement	1 form A, 1 NO	1 form C, 1 CO	1 form A, 1 NO	1 form A, 1 NO	1 form C, 1 CO
Rated voltage	12VDC	12VDC	12VDC	12VDC	12VDC
Rated current	45A	A/B (NO/NC)	30A	40A	A/B (NO/NC)
Limiting continuous current		45/30A			40/25A
23°C	45A	45/30A	30A	40A	40/25A
85°C	30A	30/25A	25A	25A	25/20A
Limiting making current ¹⁾	100A	100/30A	120A ³⁾	180A	180/60A
Limiting breaking current ²⁾	60A	60/30A	60A	60A	60/30A
Contact material	AgNi0.15	AgNi0.15	AgSnO ₂	AgSnO ₂	AgSnO ₂
Min. recommended contact load		1A at 5VDC ⁴⁾			
Initial voltage drop, at 10A, typ./max.		20/300mV			
Operate/release time		typ. 5/3ms ⁵⁾			
Electrical endurance	>2x10 ⁵ ops. at 13.5VDC, 40A	>2x10 ⁵ ops. at 13.5VDC, 40A	>2.2x10 ⁶ ops. up to 8x21W	>10 ⁵ ops. up to 4x60W	>10 ⁵ ops. up to 4x60W
Mechanical endurance, DC coil		>10 ⁷ ops.			

- 1) The values apply to a resistive or inductive load with suitable spark suppression and at maximum 13.5VDC for 12VDC or 27VDC for 24VDC load voltages.
- 2) For a load current duration of maximum 3s for a make/break ratio of 1:10.
- 3) Corresponds to a peak inrush current on initial actuation (cold filament).
- 4) See chapter Diagnostics of Relays in our Application Notes or consult the internet at <http://relays.te.com/appnotes/>
- 5) For unsuppressed relay coil. A low resistive suppression device in parallel to the relay coil increases the release time and reduces the lifetime caused by increased erosion and/or higher risk of contact tack welding.

Max. DC load breaking capacity

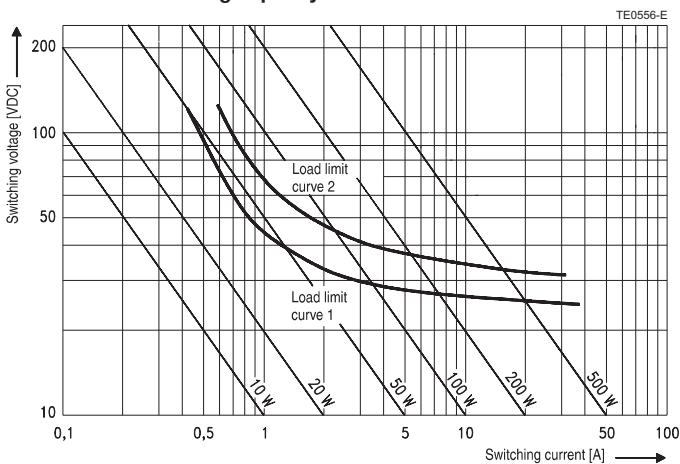

Load limit curve 1: arc extinguishes, during transit time (changeover contact).
 Load limit curve 2: safe shutdown, no stationary arc (make contact).
 Load limit curves measured with low inductive resistors verified for 1000 switching events.

Power Relay K (Open – Sealed) (Continued)

Coil Data


Rated coil voltage 12VDC / 24VDC

Coil versions, DC coil

Coil code	Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance $\Omega \pm 10\%$	Rated coil power W
001	12	6.9	1.2	90	1.6
022	24	14.1	2.4	362	1.6

All figures are given for coil without pre-energization, at ambient temperature +23°C. Other coils on request.

Coil operating range

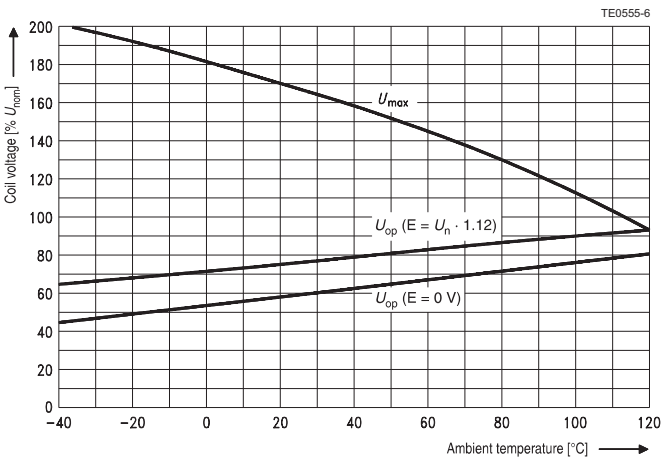

Does not take into account the temperature rise due to the contact current
E = pre-energization

Insulation Data

Initial dielectric strength
between open contacts 500VAC_{rms}
between contact and coil 500VAC_{rms}

Other Data

EU RoHS/ELV compliance compliant
Ambient temperature, DC coil -40 to +105°C⁶⁾
Climatic cycling with condensation, EN ISO 6988 3 cycles, storage 8/16h
Temperature cycling (shock), IEC 60068-2-14, Na 20 cycles, -40/+85°C (dwell time 1h)
Damp heat cyclic, IEC 60068-2-30, Db, Variant 1 6 cycles, upper air temperature 55°C
Damp heat constant, IEC 60068-2-3, method Ca 56 days, upper air temperature 55°C
Degree of protection, IEC 61810 RT 0/II – open version
RT III – immersion cleanable version
Corrosive gas, IEC 60068-2-42 10 days
IEC 60068-2-43 10 days
Vibration resistance (functional), IEC 60068-2-6 (sine pulse form), acceleration, acc. to position 10 to 200Hz, 20 to 40g⁷⁾
Shock resistance (functional), IEC 60068-2-27 (half sine form single pulses), acceleration, acc. to position 8ms 30g⁷⁾
Terminal type PCB
Weight sealed version approx. 22g (0.77oz)
open version approx. 19g (0.67oz)
Solderability (aging 3: 4h/155°C) for leaded process ($T_m = 183^\circ\text{C}$), for Pb-free process ($T_m = 217^\circ\text{C}$), IEC 60068-2-20 Ta, method 1, hot dip 5s, 215°C
Storage conditions according IEC 600688⁸⁾
Packaging unit sealed version 300 pcs.
open version 500 pcs.


6) See coil operating range DC.
7) No change in the switching state >10µs.
8) For general storage and processing recommendations please refer to our Application Notes and especially to Storage in the Definitions or at <http://relays.te.com/appnotes/>

Terminal Assignment (Open and Sealed Version)


Bottom view on solder pins

1 form A, 1 NO

1 form C, 1 CO



TE1091-B1




TE1086-A1

*) Terminal 4 to be bridged


Power Relay K (Open – Sealed) (Continued)

Dimensions

Power Relay K open version

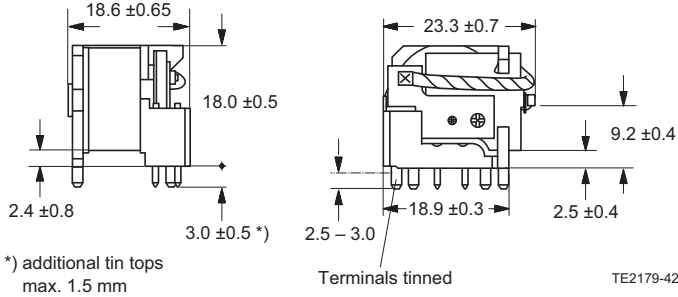


Power Relay K sealed version

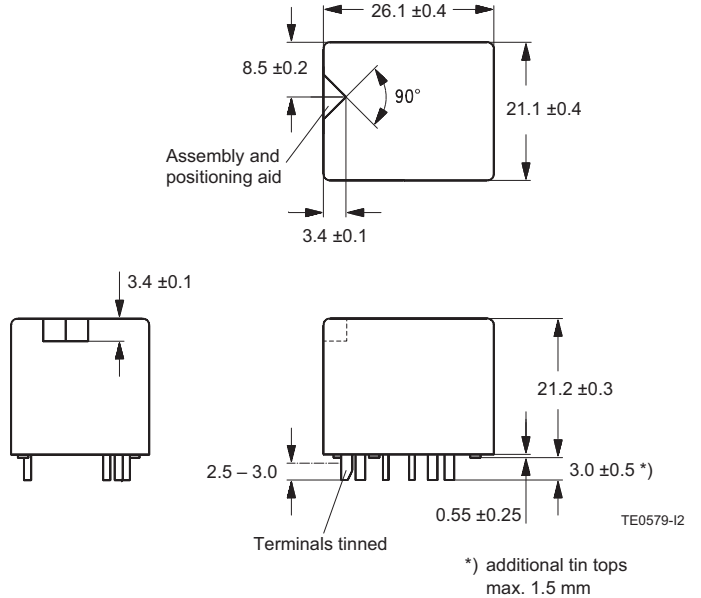


Mounting Hole Layout

Bottom view on solder pins

Power Relay K open version

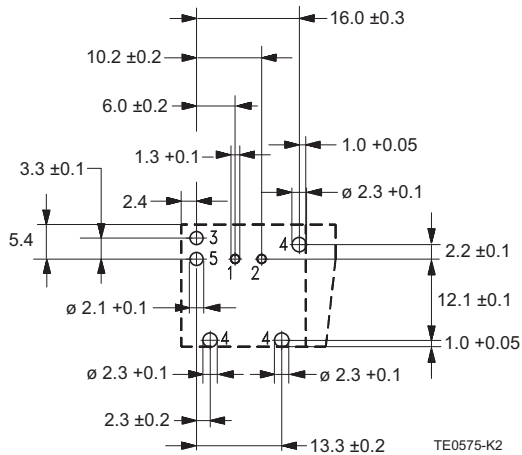

Power Relay K sealed version

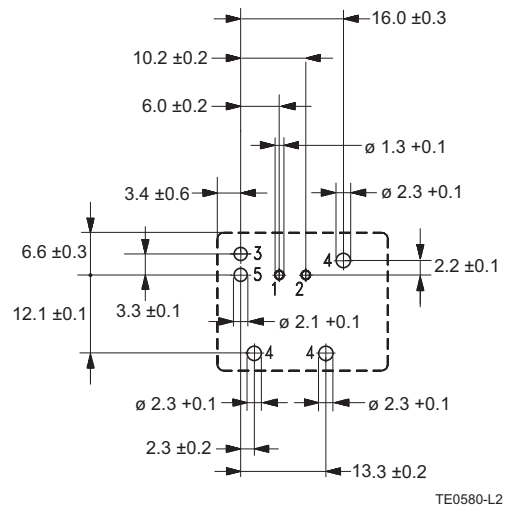

Power Relay K (Open – Sealed) (Continued)

Product code structure		Typical product code		V23076	-A	1	022	-C	13	3
Type										
		V23076 Power Relay K, sealed								
		V23133 Power Relay K, open								
Terminal		A PCB								
Design		1 Single relay		3 Single relay						
Coil		001 12VDC		022 24VDC						
Contact type		C Single contact		D Single contact						
Contact material		13 AgNi0.15		14 AgSnO ₂						
		15 AgSnO ₂ (Special)								
Contact arrangement		2 1 form A, 1 NO		3 1 form C, 1 CO						

Product code	Terminal/Encl.	Design	Coil	Contact	Cont. material	Arrangement	Part number		
V23076-A1001-C133	PCB, sealed	Single relay	12VDC	Single	AgNi0.15	1 form C, CO	1393277-4		
V23076-A1001-D143					AgSnO ₂		1393277-6		
V23076-A3001-C132					AgNi0.15		1 form A, NO	1-1393277-4	
V23076-A3001-D142					AgSnO ₂			1-1393277-7	
V23076-A3001-D152 ¹⁾					AgSnO ₂ special		1-1414175-0		
V23076-A1022-C133			24VDC			AgNi0.15	1 form C, CO	1393277-8	
V23076-A1022-D143						AgSnO ₂		1393277-9	
V23076-A3022-C132						AgNi0.15		1 form A, NO	1-1393277-8
V23076-A3022-D142						AgSnO ₂			1-1393277-9
V23133-A1001-C133						PCB, open		Single relay	12VDC
V23133-A1001-D143	AgSnO ₂	1-1393278-3							
V23133-A3001-C132	AgNi0.15	1 form A, NO	5-1393278-7						
V23133-A3001-D142	AgSnO ₂		5-1393278-9						
V23133-A3001-D152 ¹⁾	AgSnO ₂ special	1-1414173-0							
V23133-A1022-C133	24VDC		AgNi0.15	1 form C, CO	3-1393278-7				
V23133-A1022-D143			AgSnO ₂		3-1393278-9				
V23133-A3022-C132			AgNi0.15		1 form A, NO		7-1393278-1		
V23133-A3022-D142			AgSnO ₂				7-1393278-2		
V23133-A3022-D152 ¹⁾			AgSnO ₂ special		1-1414174-0				

1) For indicator lamps.