


MATERIAL DATA

INSULATOR: LIQUID CRYSTAL POLYMER
UL RATING: 94 V-0
CONTACTS: PHOSPHOR BRONZE
MOUNTING: .100 [2.54] GRID
OPERATING TEMPERATURE: -50°C TO +105°C


ELECTRICAL DATA

CONTACT RESISTANCE: 30 MILLIOHMS MAX. @ 6 VDC
CURRENT RATING: 1.0 AMP
INSULATION RESISTANCE: 5000 MEGOHMS MIN
DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC MIN.
FOR 1 MINUTE


238 PIN PGA

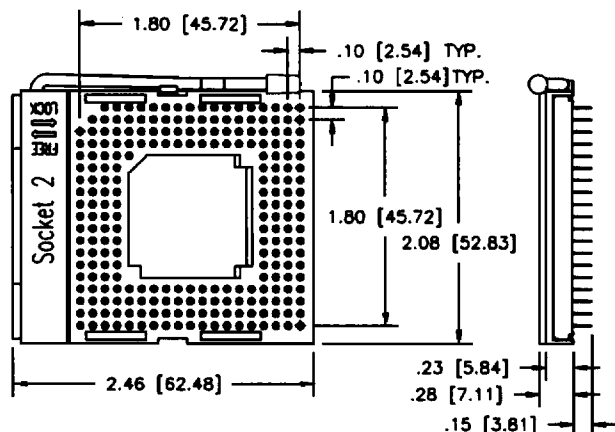


237 PIN PGA

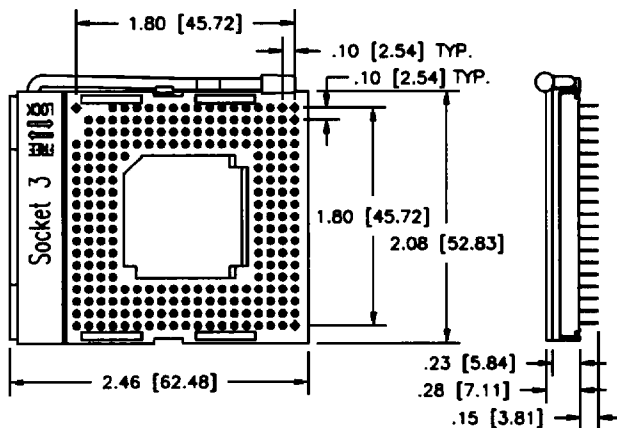

273 PIN PGA

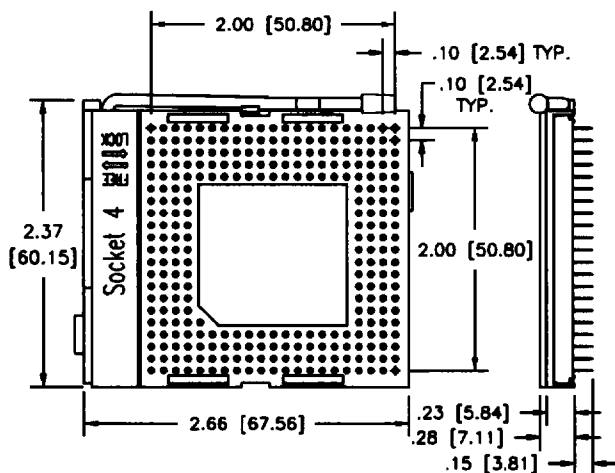

320 PIN IPGA

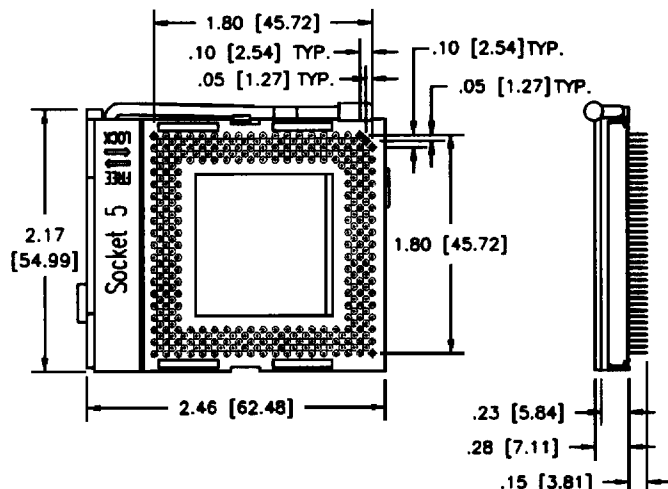

ORDERING INFORMATION

675-XXX-X
SERIES — PLATING
CONTACT: GOLD
TERMINAL: -1= GOLD FLASH OVER NICKEL
-2= 10μ INCHES GOLD OVER NICKEL
-3= 30μ INCHES GOLD OVER NICKEL
-4= GOLD PLATING ON CONTACT AREA,
120μ INCHES TIN

NO. OF CONTACTS
#2 238 PIN #4 273 PIN
#3 237 PIN #5 320 PIN