


PCB Terminal Strips, Series 256, Pin Spacings 5/5.08 mm / 0.2 in; 7.5/7.62 mm / 0.3 in; 10/10.16 mm / 0.4 in

CAGE CLAMP®



2
13

Front-entry

Pin spacing 5/5.08 mm / 0.2 in
0.08 – 2.5 mm² | AWG 28 – 12
250 V/4 kV/3, 16 A | 300 V, 15 A
500 V/4 kV/2, 16 A | 300/600 V, 15/5 A

5 – 6 mm / 0.22 in

Pin spacing 7.5/7.62 mm / 0.3 in
0.08 – 2.5 mm² | AWG 28 – 12
400 V/6 kV/3, 16 A | 300 V, 15 A
800 V/6 kV/2, 16 A | 300/600 V, 15/5 A

5 – 6 mm / 0.22 in




Pin spacing 10/10.16 mm / 0.4 in
0.08 – 2.5 mm² | AWG 28 – 12
500 V/6 kV/3, 16 A | 300 V, 15 A
1000 V/6 kV/2, 16 A | 300/600 V, 15/5 A

5 – 6 mm / 0.22 in

* VDE K 88 N CCA P BV NV




* VDE K 88 N CCA P BV NV

* VDE K 88 N CCA P BV NV

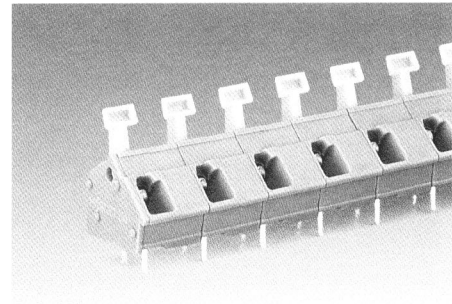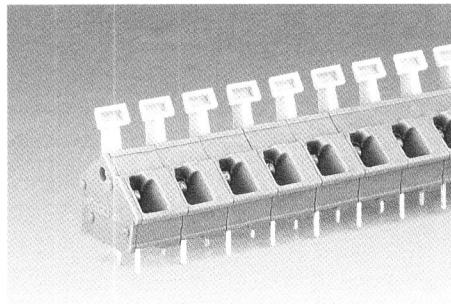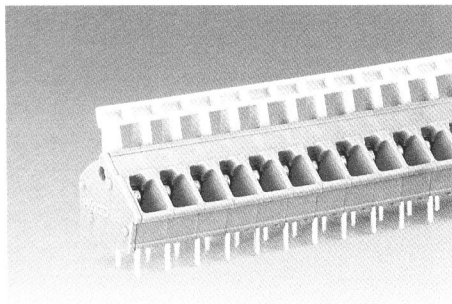

No. of poles	Item-No.	Pack.-unit pcs	No. of poles	Item-No.	Pack.-unit pcs	No. of poles	Item-No.	Pack.-unit pcs
Terminal strips, grey, standard lengths, 2 solder pins/pole			Terminal strips, grey, standard lengths, 2 solder pins/pole			Terminal strips, grey, standard lengths, 2 solder pins/pole		
2	256-402	400 (4 x 100)	2	256-502	280 (4 x 70)	2	256-602	200 (4 x 50)
3	256-403	280 (4 x 70)	3	256-503	180 (4 x 45)	3	256-603	140 (4 x 35)
4	256-404	200 (4 x 50)	4	256-504	140 (4 x 35)	4	256-604	100 (4 x 25)
5	256-405	160 (4 x 40)	5	256-505	120 (4 x 30)	5	256-605	80 (4 x 20)
6	256-406	140 (4 x 35)	6	256-506	100 (4 x 25)	6	256-606	60 (4 x 15)
7	256-407	120 (4 x 30)	7	256-507	80 (4 x 20)	7	256-607	60 (4 x 15)
8	256-408	100 (4 x 25)	8	256-508	60 (4 x 15)	8	256-608	60 (4 x 15)
9	256-409	100 (4 x 25)	9	256-509	60 (4 x 15)	9	256-609	40 (4 x 10)
10	256-410	80 (4 x 20)	10	256-510	60 (4 x 15)	10	256-610	40 (4 x 10)
12	256-412	60 (4 x 15)	12	256-512	40 (4 x 10)	12	256-612	40 (4 x 10)
16	256-416	60 (4 x 15)	16	256-516	40 (4 x 10)	16	256-616	20 (4 x 5)
24	256-424	40 (4 x 10)	24	256-524	20 (4 x 5)	24	256-624	20 (4 x 5)
36	256-436	20 (4 x 5)						
48	256-448	20 (4 x 5)						
Additional item-No. for terminal strips with 5.5 mm / 0.217 in long solder pins .../332-000			Additional item-No. for terminal strips with 5.5 mm / 0.217 in long solder pins .../332-000			Additional item-No. for terminal strips with 5.5 mm / 0.217 in long solder pins .../332-000		
For assemblies in other lengths and colors, please contact factory.			For assemblies in other lengths and colors, please contact factory.			For assemblies in other lengths and colors, please contact factory.		
Test adapters see page 2.17.			Test adapters see page 2.17.			Test adapters see page 2.17.		
			Additional item-Nos. for colored terminal strips blue .../-006 ① dark grey .../-008 light grey .../-009 orange .../-012 light green .../-017 ① With blue insulating housings suitable for EEx i applications (only suitable for pin spacings 7.5/7.62 mm/0.3 in and 10/10.16 mm/0.4 in)			Ordering examples Terminal strip, pin spacing 5/5.08 mm/0.2 in 8-pole, orange: 256-408/000-012 Terminal strip with 5.5 mm / 0.217 in long solder pins, pin spacing 7.5/7.62 mm/0.3 in 12-pole, blue: 256-512/332-006		

Dimensions (in mm) (Adjustment of pin spacing is made by pulling on the end blocks so that they expand to satisfy the hole centers required.)

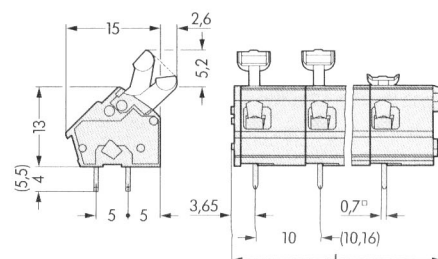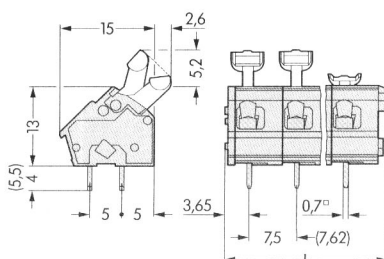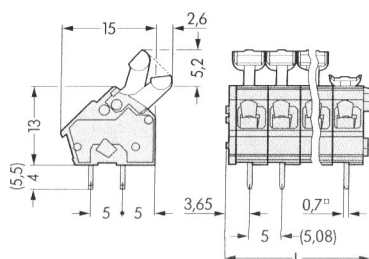

Diameter of drilled hole: 1.1^{+0.1} mm
L = (No. of poles x pin spacing) + 2.9 mm

Diameter of drilled hole: 1.1^{+0.1} mm
L = (No. of poles x pin spacing) + 2.9 mm

Diameter of drilled hole: 1.1^{+0.1} mm
L = (No. of poles x pin spacing) + 2.9 mm