

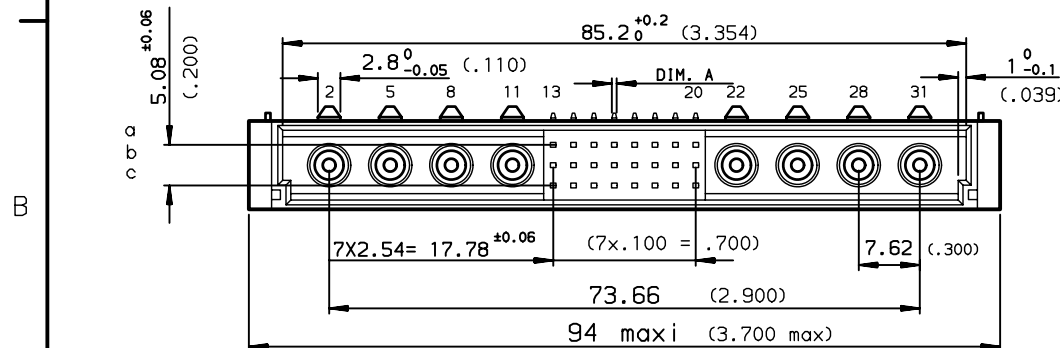
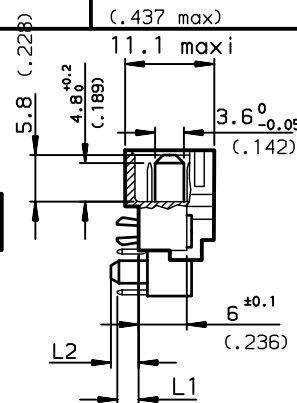


DIMENSIONS mm (inches)

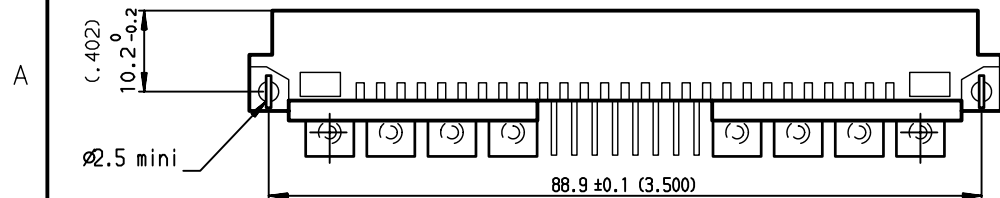

PCB DRILLING

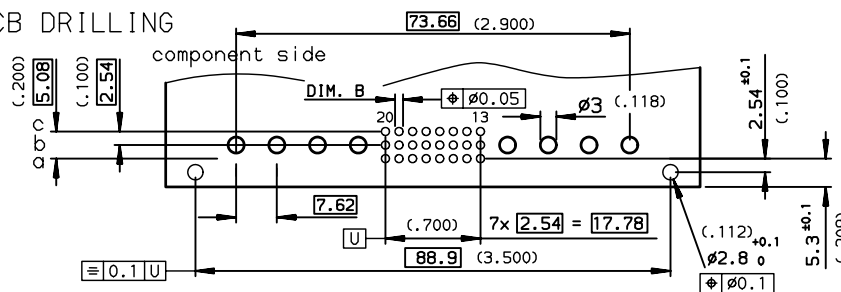

PART NUMBER		8609		GP		5	
PIN OUT		rows a-b-c		rows a-c			
		3 - 24		4 - 16			
NUMBER OF CONTACTS							
TERMINATION		L = 2.75 ±0.15 (0.108)		A = Ø0.6 -0.08		B = Ø0.08 +0.3	
		L2 = 3.40 ±0.2 (0.134)				13 23	
OPTIONS		no option		with harpoons		7 H	
PERFORMANCE CLASS		DIN 41612 class 2		DIN 41612 class 1		5 6	
TERMINATION TYPE		TIN LEAD		LEAD FREE		000E1 E1LF	

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C-8609-0000A

European Views

www.fciconnect.com		surface ISO 1302		tolerance std ISO 406 ISO 1101		projection mm	
		TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	TARON	1997/04/14	ANGULAR	LINEAR	0.X	±0.1	size A3
Eng	TARON	1997/04/14	0.XX	±0.1	0.XX	±0.1	Scale 1.5
Chr	LEGARE	1997/04/14	0.XX' ±2'	0.XXX	±0.1	ECN	LS06-0095
Appr	LEGARE	1997/04/14	Product family		DIN 8609		Spec ref -
FCI		RIGHT ANGLE MALE - STYLE M		with power pins fitted		C-8609-0582	
catalog no				CUSTOMER		sheet 1 of 1	

rev	ecn no	dr	date
B	-	ROU	1997/09/12
C	LS05-001	JTA	2005/03/03
D	LS06-0095	LGO	2006/07/13
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-