


ALUMINUM NITRIDE RESISTORS AND TERMINATIONS

RESISTOR		TERMINATION		POWER (Watts, CW)	CAPACITANCE (pF)	FREQUENCY (GHz)	VSWR (Max.)
MODEL NUMBER	OUTLINE	MODEL NUMBER	OUTLINE				
"A" SERIES (FLANGE)							
A10A-R1	R1	A10B-T1L	T1L	10	0.9	4	1.25:1
A10B-R1	R1	A10A-T1L	T1L	10	0.9	4	1.25:1
		A10B-T1C	T1C	10	0.9	4	1.25:1
		A10A-T1C	T1C	10	0.9	4	1.25:1
		A10B-T1R	T1R	10	0.9	4	1.25:1
A10A-R2	R2	A10A-T1R	T1R	10	0.9	4	1.25:1
A10B-R2	R2	A10B-T2	T2	10	0.9	4	1.25:1
A20A-R3	R3	A20B-T3L	T3L	20	1.4	3	1.25:1
A20B-R3	R3	A20B-T3C	T3C	20	1.4	3	1.25:1
		A20B-T3R	T3R	20	1.4	3	1.25:1
A40A-R4	R4	A40B-T4	T4	40	1.7	2	1.25:1
A40A-R5	R5	A40B-T5	T5	40	4.2	2	1.25:1
A50A-R6	R6	A50B-T6L	T6L	50	1.8	2	1.25:1
		A50B-T6R	T6R	50	1.8	2	1.25:1
A75A-R8	R8	A75B-T8	T8	75	1.8	3	1.25:1
A125A-R9	R9	A125B-T9	T9	125	3.5	1	1.25:1
A125A-R10	R10	A125B-T10	T10	125	3.5	1	1.25:1
A125A-R11	R11	A125B-T11	T11	125	4.2	2	1.25:1
A200A-R12	R12	A200B-T12	T12	200	3.7	2	1.25:1
A200B-R12	R12			200	3.7	2	1.25:1
A250A-R12	R12	A250B-T12	T12	250	3.7	2	1.25:1
A250B-R12	R12			250	3.7	2	1.25:1
"A" SERIES (FLANGELESS)							
A30A-R16	R16	A30B-T16	T16	30	0.9	4	1.25:1
A30B-R16	R16	A30A-T16	T16	30	0.9	4	1.25:1
		A30B-TC	TC	30	0.7	4	1.25:1
		A30A-TC	TC	30	0.7	4	1.25:1
A40A-R17	R17			40	1.4	3	1.25:1
A40B-R17	R17	A40B-T17	T17	40	1.4	3	1.25:1
A100A-R18	R18	A100B-T18	T18	100	3.5	2	1.25:1
A125A-R19	R19	A125B-T19	T19	125	4.2	2	1.25:1
A150A-R20	R20	A150B-T20	T20	150	3.5	1	1.25:1
A200A-R21	R21	A200B-T21	T21	200	3.7	2	1.25:1
A200B-R21	R21			200	3.7	2	1.25:1
A250A-R21	R21	A250B-T21	T21	250	3.7	2	1.25:1
A250B-R21	R21			250	3.7	2	1.25:1
A300A-R21	R21	A300B-T21	T21	300	3.7	2	1.25:1
A300B-R21	R21			300	3.7	2	1.25:1

ORDERING INFORMATION

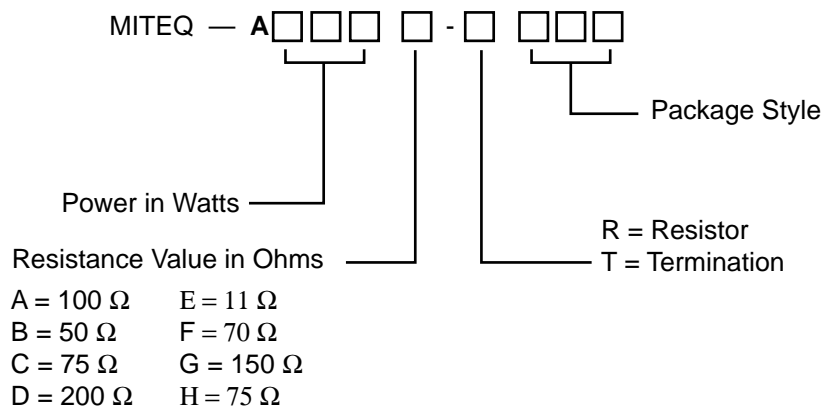

NOTE: Optional resistor values are available upon request. Please contact factory.