

E-Series Coupler

5 - 1000 MHz

EMDC-13-1-75

V3.00

Features

- Coupling: +13 dB Typical
- Surface Mount

Specifications @ 25°C

Frequency Range	5 - 1000 MHz	
Coupling	Nominal	Flatness
5 - 1000 MHz	13 ±1.1 dB	0.9 dB
Main Line Loss	Typical	Maximum
5 - 50 MHz	1.5 dB	2.2 dB
50 - 500 MHz	1.3 dB	2.0 dB
500 - 1000 MHz	1.3 dB	2.0 dB
Directivity	Typical	Minimum
5 - 50 MHz	25 dB	20 dB
50 - 500 MHz	20 dB	15 dB
500 - 1000 MHz	13 dB	7 dB
Return Loss	Typical	Minimum
	14 dB	8 dB

Operating Characteristics

Impedance	75 Ohms Nominal
-----------	-----------------


Ordering Information

Part No.	Packaging
EMDC-13-1-75	Tube
EMDC-13-1-75TR	Forward Tape & Reel

Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Power	250 mW
DC Current	30 mA
Operating Storage Temp	-20° to +85°C

SM-22

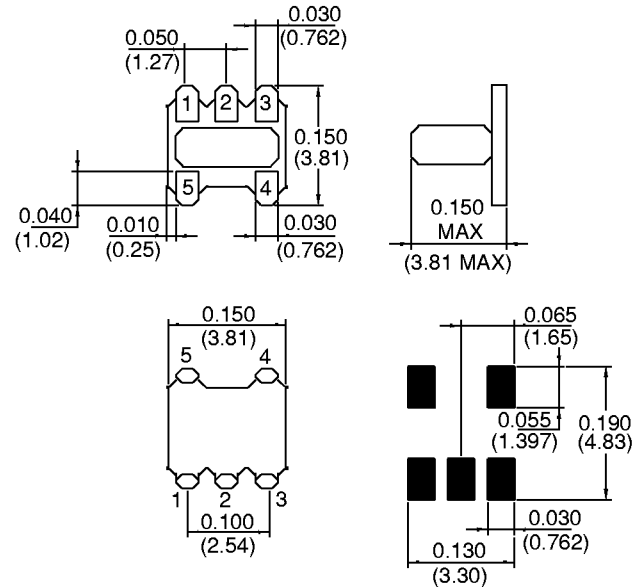

Dimensions in () are in mm.
Unless Otherwise Noted: .x = ±0.04 (1.00)
.xx = ±0.02 (0.50)
.xxx = ±0.010 (0.250)

Pin Configuration

Function	Pin No.
Input	3
Output	4
Coupled	1
Ground	2
External 75 Ohms	5

S 1012 B