


Red LED/photo IC for optical link

L9534/S9022

Light emitter/sensor compatible with IEEE1394.b/S100

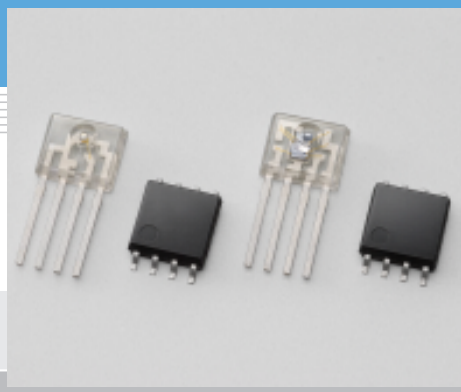

L9534, H9020, S9022 and H9021 devices are POF (Plastic Optical Fiber) link devices that conform to p1394.b (proposal in IEEE1394). The transmitter is comprised of L9534 LED and its driver IC H9020. The receiver consists of S9022 monolithic photo IC integrating a photodiode with an analog amplifier and its output comparator H9021. These devices make it easy to configure high-speed optical links with transmission rates of up to 125 Mbps.

Features

Transmitter

- L9534 red LED and H9020 LED driver IC
- Peak emission wavelength: 650 nm
- High-speed response and high output power
- LVPECL input

Receiver

- S9022 photo IC and H9021 comparator
- 4 M to 125 Mbps
- Monolithic photo IC (S9022)
- LVPECL output
- Wide dynamic range
- Signal Detecting function

Applications

- Home networks and short-range high-speed data communications

Transmitter (L9534, H9020)

■ Absolute maximum ratings (Ta=25 °C)

Parameter	Symbol	Value	Unit
L9534	Forward current	If	40
	Reverse voltage	VR	3
H9020	Supply voltage	Vccmax	-0.5 to +7
	Input voltage	Vimax	-0.5 to Vcc+0.5
Operating temperature		Topr	-20 to +70
Storage temperature		Tstg	-40 to +85

■ Electrical and optical characteristics [Ta=25 °C, Vcc=4.75 to 5.25 V (H9020)] *1

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Data rate	fD	NRZ	DC	-	125	Mbps
Current consumption	Icc	*2	-	25	35	mA
L9534	Peak emission wavelength	λ_p	640	650	660	nm
	Spectral half width (FWHM)	$\Delta\lambda$	-	10	-	nm
	Fiber coupled optical power	Po	-6.5	-	-3	dBm
H9020	High level input voltage	Vih	2.15	-	2.4	V
	Low level input voltage	Vil	1.5	-	1.75	V
Pulse width distortion	Δt	50 % *4	-1	-	+1	ns
Jitter	Δt_j	50 % *4	-	-	1.5	ns


*1: Measured with the recommended driver circuit shown below.

*2: Average value (input signal duty ratio 50 %)

*3: Measured with a plastic fiber GH4001 ($\phi 1$ mm SI-POF, NA=0.5) made by Mitsubishi Rayon.

*4: Pseudo-random bi-phase signal at 125 Mbps (NRZ conversion).

■ Recommended connection circuit

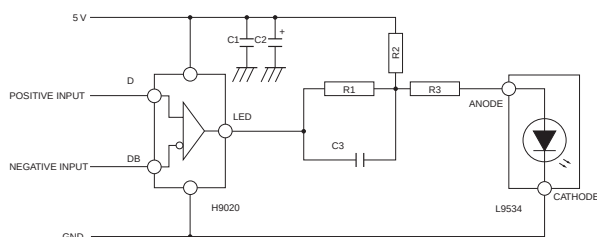

KLEDC0020EC

SOLID STATE DIVISION

Receiver (S9022, H9021)

■ Absolute maximum ratings (Ta=25 °C)

Parameter	Symbol	Value	Unit
Supply voltage	Vcc	-0.5 to +7.0	V
Output voltage	Vo	-0.5 to Vcc+0.5	V
Operating temperature	Topr	-20 to +70	°C
Storage temperature	Tstg	-40 to +85	°C


■ Electrical and optical characteristics [Ta=25 °C, Vcc=4.75 to 5.25 V (S9022), Vcc=3.0 to 3.6 V (H9021)] *5

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Data rate	fD	NRZ signal	4	-	125	Mbps
Minimum overload	Pimax		-2	-	-	dBm
Minimum receiver input power	Pimin		-	-	-22	dBm
Signal detection level	Psd		-	-	-24	dBm
Current consumption	Icc	CL=3 pF, RL=∞, *6	-	-	35	mA
			-	-	60	
Output voltage	High level output voltage	Voh	Vcc -1.1	-	Vcc -0.8	V
	Low level output voltage	Vol	Vcc -1.8	-	Vcc -1.6	V
	Rise time	tr	-	-	2	ns
	Fall time	tf	-	-	2	ns
		20 to 80 % *7	-	-	-	-
Pulse width distortion	Δt	*7	-1.5	-	+1.5	ns
Jitter	Δtj	*7	-	-	2.5	ns
SD	High level output voltage	Vsdh	No-load	Vcc -1.1	-	V
	Low level output voltage	Vsdl	No-load	-	Vcc -1.6	V

*5: Measured with the recommended driver circuit shown below.


*6: Average value (input optical signal duty ratio 50 %) *7: Pseudo-random bi-phase signal at 125 Mbps (NRZ conversion).

■ Recommended connection circuit

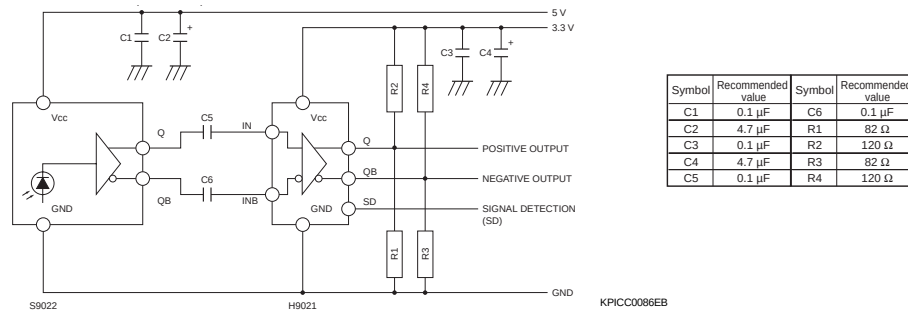


■ Dimensional outlines (unit: mm)

L9534, S9022

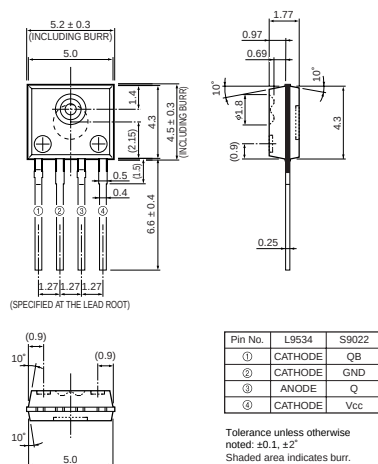

KPICA0048EB

H9020, H9021

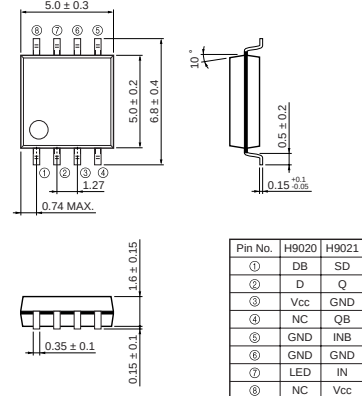

KPICA0049EB

HAMAMATSU

Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications are subject to change without notice. No patent rights are granted to any of the circuits described herein. ©2004 Hamamatsu Photonics K.K.

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Hamamatsu City, 435-8558 Japan, Telephone: (81) 053-434-3311, Fax: (81) 053-434-5184, <http://www.hamamatsu.com>

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P.O.Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-1218

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 08152-3750, Fax: (49) 08152-2658

France: Hamamatsu Photonics France S.A.R.L.: 8, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 10

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777

North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171 41 Soina, Sweden, Telephone: (46) 8-509-031-00, Fax: (46) 8-509-031-01

Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39) 02-935-81-733, Fax: (39) 02-935-81-741

Cat. No. KPIC1049E06
May. 2004 DN