

Baureihe: SP-E 20/11 low profile

(Kompaktschwingdrossel für EVGs)

Series: SP-E 20/11 low profile

(Compact oscillating choke for ECUs)




Technische Merkmale

- low cost
- Kernmaterial: Leistungsferrit K2006
- Spulenkörpermateriale: Polyamid Pa. 6.6 GF 35% UL94 V0
- Isolierstoffklasse B
- Impulsspannungsfestigkeit innerhalb der Wicklung $\geq 2 \text{ kV}_{\text{eff}}$.

Technical characteristics

- low cost
- core material: power ferrite K2006
- coil former material: polyamide Pa. 6.6 GF 35% UL94 V0
- insulation class B
- pulse dielectric strength within winding $\geq 2 \text{ kV}_{\text{eff}}$.

Bestellnummer Order no.	L_0 / mH $\pm 10\%$	I_s / A ($0,9 \times L_0$)	L_N / mH	R_{Cu} / Ω
094.850	0,39	3,2	0,35	0,35
094.851	0,56	2,7	0,5	0,4
094.852	0,82	2,3	0,7	0,5
094.853	1,0	1,9	0,9	0,7
094.854	1,2	1,8	1,0	0,8
094.855	1,8	1,5	1,5	0,95
094.856	2,0	1,4	1,8	1,25
094.857	2,2	1,2	2,0	1,31
094.858	2,7	1,1	2,5	1,5
094.859	3,0	1,1	2,75	1,6
094.860	3,3	1,1	3,0	1,7
094.861	3,9	1,0	3,5	1,82
094.862	4,7	0,9	4,5	2,9
094.863	5,6	0,8	5,0	3,1

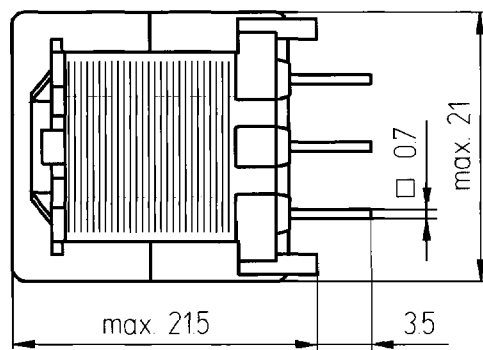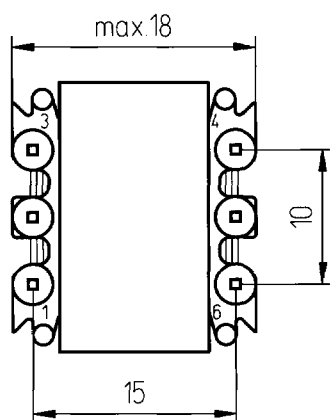

sp1611ka