




BOARD MOUNT, TOP WIRE ENTRY

Board Mount, Low Profile
10.0 mm Centerline,
Top Wire Entry,
Color – Green


UL Rating – 600 V, 13.5 A
16-30 AWG
10 A for field wiring applications



Suggested Screw Torque—
6.0 in.-lbs.

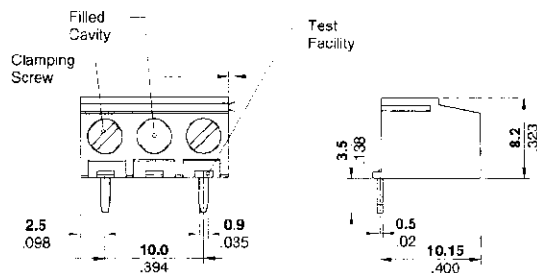


Recommended PC Board Layout




No. of Positions	Dim. A	Part Numbers
2	15.0 [.591]	284095-2
3	20.0 [.787]	284095-3
4	25.0 [.984]	284095-4
5	30.0 [1.181]	284095-5
6	35.0 [1.378]	284095-6
7	40.0 [1.575]	284095-7
8	45.0 [1.772]	284095-8
9	50.0 [1.968]	284095-9
10	55.0 [2.165]	1-284095-0
11	60.0 [2.362]	1-284095-1
12	65.0 [2.559]	1-284095-2
13	70.0 [2.755]	1-284095-3

Board Mount
10.0 mm Centerline,
Top Wire Entry
Color – Green


UL Rating – 600 V, 17.5 A
12-30 AWG
15 A for field entry applications



Suggested Screw Torque—
7.0 in.-lbs.

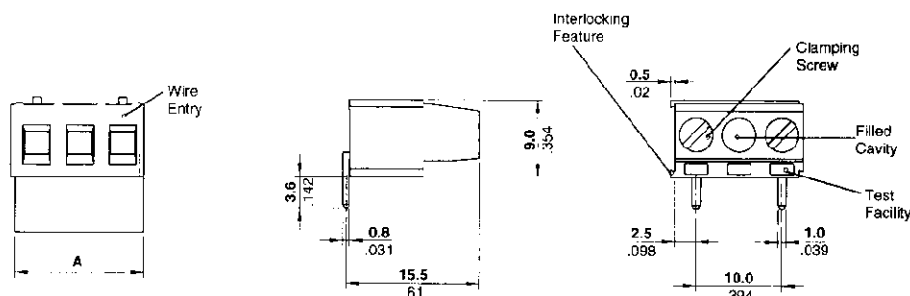

Recommended PC Board Layout



No. of Positions	Dim. A	Part Numbers
2	15.0 [.591]	282852-2
3	20.0 [.787]	282852-3
4	25.0 [.984]	282852-4
5	30.0 [1.181]	282852-5
6	35.0 [1.378]	282852-6
7	40.0 [1.575]	282852-7
8	45.0 [1.772]	282852-8
9	50.0 [1.968]	282852-9
10	55.0 [2.165]	1-282852-0
11	60.0 [2.362]	1-282852-1
12	65.0 [2.559]	1-282852-2
13	70.0 [2.775]	1-282852-3