

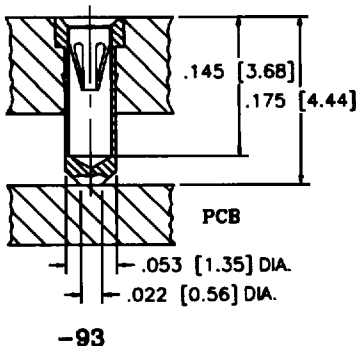


SERIES 106 OPEN FRAME WAFER CHART			
	PIN	DIM "A"	
FIG. 1	6	.300 [7.62]	306
	8	.400 [10.16]	308
	10	.500 [12.70]	310
FIG. 2	14	.700 [17.78]	314
	16	.800 [20.32]	316
	18	.900 [22.86]	318
	20	1.000 [25.40]	320
	22	1.100 [27.94]	322
	24	1.200 [30.48]	324
FIG. 3	28	1.400 [35.56]	328
	16	.800 [20.32]	416
	22	1.100 [27.94]	422
FIG. 4	24	1.200 [30.48]	424
	28	1.400 [35.56]	428
FIG. 5	30	1.500 [38.10]	430
	32	1.600 [40.64]	432
	36	1.800 [45.72]	436
	40	2.000 [50.80]	440
	48	2.400 [60.96]	448
FIG. 6	50	2.500 [63.50]	450
	52	2.600 [66.04]	452
	64	3.200 [81.28]	464

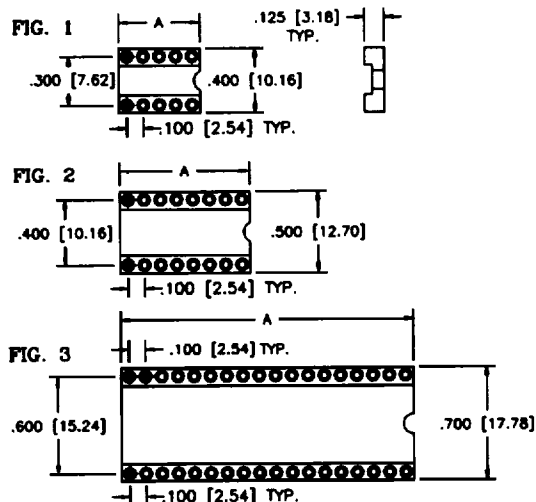

SERIES 206 SOLID FRAME WAFER CHART			
	PIN	DIM "A"	
FIG. 1	6	.300 [7.62]	306
	8	.400 [10.16]	308
	10	.500 [12.70]	310
	14	.700 [17.78]	314
	16	.800 [20.32]	316
	18	.900 [22.86]	318
	20	1.000 [25.40]	320
	24	1.200 [30.48]	324
FIG. 2	16	.800 [20.32]	416
	22	1.100 [27.94]	422
	24	1.200 [30.48]	424
FIG. 3	24	1.200 [30.48]	424
	28	1.400 [35.56]	428
	30	1.500 [38.10]	430
	32	1.600 [40.64]	432
	36	1.800 [45.72]	436
	40	2.000 [50.80]	440

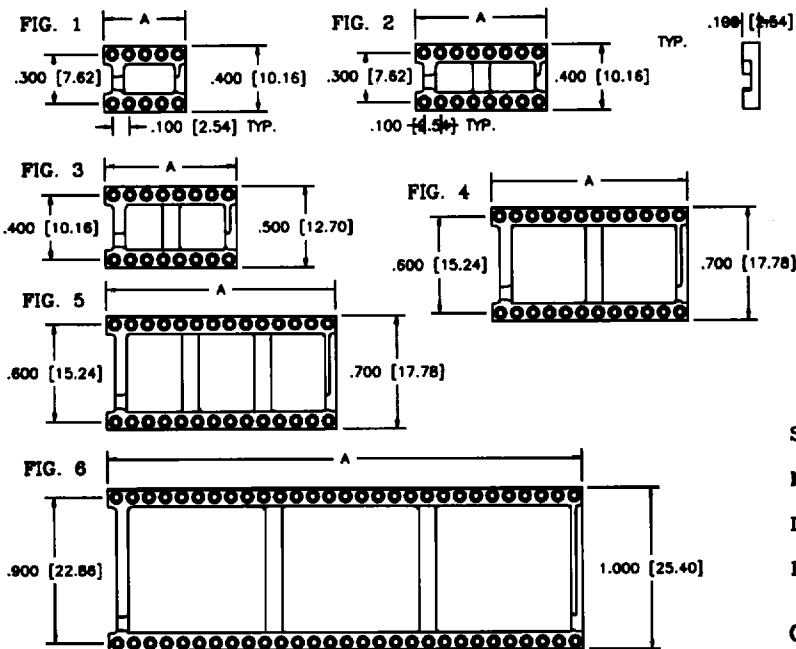

TECHNICAL SPECIFICATIONS

MATERIAL	GREY NYLON 46
INSULATOR	UL 94V-0 LISTED
TERMINAL	BRASS PER ASTM-B16
CONTACT	BeCu PER ASTM-B194
OPERATING TEMP.	-65°C TO +150°C
CONTACT FORCES	
INSERTION	STANDARD 9 oz. AVG.
WITHDRAWAL	STANDARD 2 oz. MIN.

SERIES
106: OPEN
206: SOLID
DIP - SPACING
NO. OF PINS
TERMINAL STYLE
FOR OPTIONAL TERMINAL STYLES
SEE TERMINAL STYLES

ORDERING INFORMATION

106-XXX-XXX-PXX-Y12
206-XXX-XXX-PXX-Y10

LOGO
INSULATOR MATERIAL
OTHER MATERIALS AVAILABLE
CONSULT FACTORY
PLATING: TERMINAL / CONTACT
P30: GOLD / GOLD
P31: TIN-LEAD / GOLD
P32: TIN-LEAD / TIN
OTHER PLATINGS AVAILABLE
SEE OPTIONAL PLATINGS

CONTACT TYPE