

FLAT CABLE CONNECTOR

PHYSICAL PROPERTIES

Connector:

HEADER: Brass, gold over nickel, 94V-0 thermoplastic

CONNECTOR: Copper alloy; gold over nickel 94V-0 thermoplastic

WIRE RANGE: 26-30 AWG solid, 28 AWG stranded

MAXIMUM CURRENT: 1 Ampere

Terminal Block (2MA Series):

HOUSING MATERIAL: Thermoplastic polyester

FLAMMABILITY: UL94V-0

COLOR: Black

MAX. OPERATING TEMPERATURE: 120°C


TERMINALS: Bright acid-tin over copper alloy

SCREWS: #3-48, steel zinc plated


WIRE RANGE: 12-22 AWG

MOUNTING: 2TK2 and 2TK2D Series

SNAPTRACK Channel

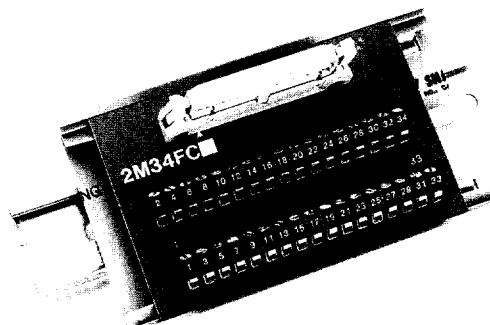

2M34FC

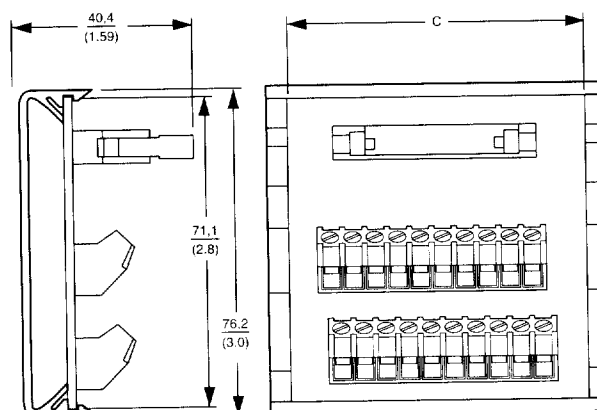

Ordering Information

# OF POSITIONS	CATALOG NUMBER	C
10	2M10FC	38,1 (1.50)
14	2M14FC	53,3 (2.10)
16	2M16FC	58,4 (2.30)
20	2M20FC	68,6 (2.70)
26	2M26FC	81,3 (3.20)
34	2M34FC	104,1(4.10)
40	2M40FC	119,4 (4.70)
50	2M50FC	139,7 (5.50)
60	2M60FC	165,1 (6.50)
64	2M64FC	170,2 (6.70)

Note: Strain relief connector supplied with all assemblies.