

Ribbon Series Connector

Solder Cup, Female



Materials

Contact:

Phosphor Bronze

Insulator:

Polyester, Glass-filled

UL 94V-0, Black

Shell:

Steel Strip

Finishes


Contact:

Code A - Au Flash over
50 uinches Ni undercoat

Code B - 30 uinches Au
50 uinches Ni undercoat

Notes:

Consult our factory
specialists for your
specific design needs.

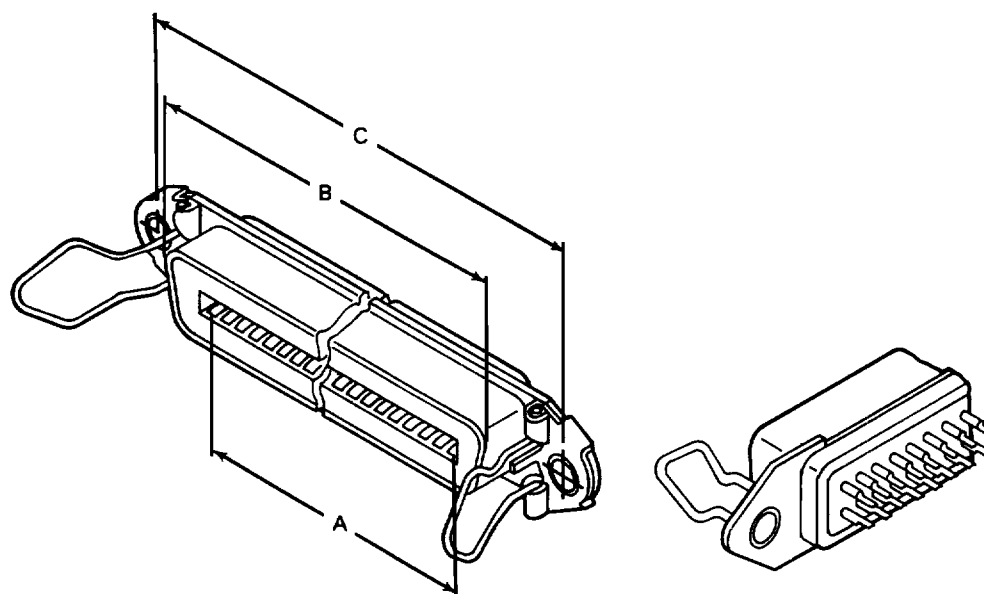

CONTACT POSITION	PLATING CODE	PART NUMBER	HARDWARE W/BAIL LATCH	DIMENSION			
				A	B	C	D
24	A	330-122-108	WITH THROUGH HOLE	2.153	1.225	1.425	1.842
	B	330-122-308		[54.69]	[31.12]	[36.20]	[46.79]
36	A	330-132-108		2.655	1.835	1.935	2.350
	B	330-132-308		[67.69]	[46.61]	[49.15]	[56.69]
50	A	330-152-108		3.259	2.430	2.530	2.948
	B	330-152-308		[82.78]	[61.72]	[64.26]	[74.88]