

Product Specifications

F2A-PDFDR-2-USA

FSJ2P-50 SureFlex™ Jumper with interface types 7-16 DIN Male Right Angle and 7-16 DIN Female, 0.61 m



CHARACTERISTICS


General Specifications

Body Style, Connector A	Right angle
Body Style, Connector B	Straight
Cable Family	FSJ2-50
Interface, Connector A	7-16 DIN Male
Interface, Connector B	7-16 DIN Female
Length	0.610 m 2.001 ft

Electrical Specifications

3rd Order IMD	-100.00 dBm
DTF, Connector A	-32.00 dB
DTF, Connector B	-32.00 dB

Jumper Assembly Sample Label

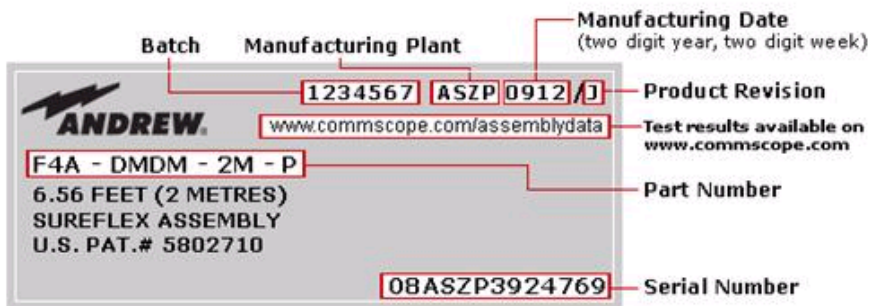

Return Loss/VSWR

Frequency Band	VSWR	Return Loss (dB)
698-960 MHz	1.08	28.00
1700-2200 MHz	1.08	28.00

Regulatory Compliance/Certifications

Agency	Classification
--------	----------------

www.commscope.com/andrew

Product Specifications



F2A-PDFDR-2-USA

RoHS 2002/95/EC
China RoHS SJ/T 11364-2006
ISO 9001:2008

Compliant by Exemption
Above Maximum Concentration Value (MCV)
Designed, manufactured and/or distributed under this quality management system



www.commscope.com/andrew

©2011 CommScope, Inc. All rights reserved.
All trademarks identified by ® or ™ are registered trademarks or trademarks, respectively, of CommScope. All specifications are subject to change.
See www.commscope.com/andrew for the most current information.

page 2 of 2
6/9/2011