

RadHard-by-Design**RHD5921 Analog Voltage Multiplexer
16-Channel, Buffered**www.aeroflex.com/RHDseries

March 8, 2011

**FEATURES**

- ❑ Single power supply operation at 3.3V to 5V
- ❑ Radiation performance
 - Total dose: $>1\text{Mrad(Si)}$; Dose rate = 50 - 300 rads(Si)/s
 - ELDRS Immune
 - SEL Immune $>100\text{ MeV-cm}^2/\text{mg}$
 - Neutron Displacement Damage $>10^{14}\text{ neutrons/cm}^2$
- ❑ Full military temperature range
- ❑ Low Power consumption when enabled
- ❑ CMOS analog switching allows rail to rail operation and low switch impedance
- ❑ Address bus (A0-3), and one enable line
- ❑ High input impedance
- ❑ Designed for aerospace and high reliability space applications
- ❑ Packaging – Hermetic ceramic
 - 24-pin, 0.3"W x 0.6"L x 0.12"Ht SOIC
 - Typical Weight 2 grams
- ❑ DSCC SMD 5962-10243 pending



GENERAL DESCRIPTION

Aeroflex's RHD5921 is a radiation hardened, single supply, 16 channel buffered output multiplexer in a 24-pin SOIC package. The RHD5921 design uses specific circuit topology and layout methods to mitigate total ionizing dose effects and single event latchup. These characteristics make the RHD5921 especially suited for the harsh environment encountered in Deep Space missions. It is guaranteed operational from -55°C to $+125^{\circ}\text{C}$. Available screened in accordance with MIL-PRF-38534 Class K, the RHD5921 is ideal for demanding military and space applications.

ORGANIZATION AND APPLICATION

The RHD5921 is a 16 to 1 CMOS buffered output voltage multiplexer. Channel selection is controlled by 4 bit binary addressing and an active low enable. Multiplexed voltages are buffered by a unity gain CMOS Rail-to-Rail amplifier. When the RHD5921 is disabled, the chip is put into a power-down state and the output is tri-stated.

The devices will not latch with SEU events to above $100\text{ MeV-cm}^2/\text{mg}$. Total dose degradation is minimal to above 1Mrad(Si) . Displacement damage environments to neutron fluence equivalents in the mid 10^{14} neutrons per cm^2 range are readily tolerated. There is no sensitivity to low-dose rate (ELDRS) effects. SEU effects are application dependant.

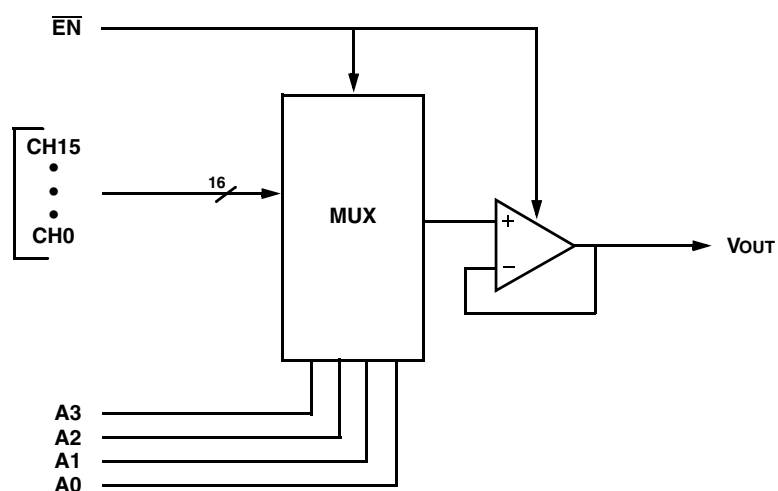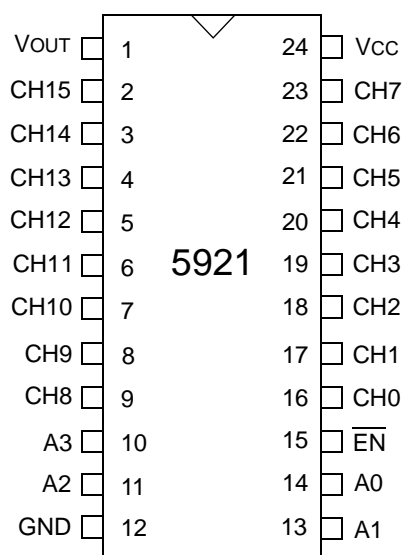

Note:

1. Package and lid are electrically isolated from signal pads.

RHD5921: 16 CHANNEL BUFFERED ANALOG MUX

ABSOLUTE MAXIMUM RATINGS

Parameter	Range	Units
Case Operating Temperature Range	-55 to +125	°C
Storage Temperature Range	-65 to +150	°C
Supply Voltage (+VCC)	+6.0	V
Digital Input Overvoltage (VEN, VA)	< VCC +0.4 > GND -0.4	V V
Analog Input Overvoltage (CH0-CH15)	< VCC +0.4 > GND -0.4	V

NOTICE: Stresses above those listed under "Absolute Maximums Rating" may cause permanent damage to the device. These are stress rating only; functional operation beyond the "Operation Conditions" is not recommended and extended exposure beyond the "Operation Conditions" may affect device reliability.

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Typical	Units
+VCC	Power Supply Voltage	3.3 to 5.0	V
VEN, VA	Logic Low Level	30% VCC	V
VEN, VA	Logic High Level	70% VCC	V

ELECTRICAL PERFORMANCE CHARACTERISTICS

(T_C = -55°C TO +125°C, +VCC = +5V -- UNLESS OTHERWISE SPECIFIED)

Parameter	Symbol	Conditions		Min	Max	Units
Supply Current (+VCC)	+ICC	EN = 30% VCC		0.5	2	mA
	+ISBY	EN = 70% VCC		10	100	μA
Address Input Current (A0-A3)	IAL	VA = 30% VCC	+25°C	-5	5	nA
			+125°C	-50	50	nA
	IAH	VA = 70% VCC	+25°C	-5	5	nA
			+125°C	-50	50	nA
Enable Input Current (EN)	IENL	VEN = 30% VCC	+25°C	-5	5	nA
			+125°C	-50	50	nA
	IENH	VEN = 70% VCC	+25°C	-5	5	nA
			+125°C	-50	50	nA
Input Leakage Current (CH0-CH15)	+IINLK	VIN = +5V, VEN =70% VCC, Output and all unused MUX inputs under test = 0V	+25°C	-5	5	nA
			+125°C	-50	50	nA
Output Leakage Current (VOUT)	+IOUTLK	Tri-state, VEN > 70% VCC	+25°C	-5	5	nA
			+125°C	-20	20	nA

ELECTRICAL PERFORMANCE CHARACTERISTICS (continued)

(T_C = -55°C TO +125°C, +V_{CC} = +5V -- UNLESS OTHERWISE SPECIFIED)

Parameter	Symbol	Conditions	Min	Max	Units
Output ON Voltage	V _{ON1}	V _{IN} = 5 Volts, R _L = 10K	4.9	5.1	V
	V _{ON2}	V _{IN} = 5 Volts, R _L = 1K	4.35	4.65	V
	V _{ON3}	V _{IN} = 3.3 Volts, R _L = 10K	3.2	3.4	V

SWITCHING CHARACTERISTICS




(T_C = -55°C TO +125°C, +V_{CC} = +5V -- UNLESS OTHERWISE SPECIFIED)

Parameter	Symbol	Conditions	Min	Max	Units
Address to Output Delay (ON, OFF)	TAHL	f = 10KHz, V _{IN} = 5 Volts, R _L = 10K	1	5	us
	TALH		1	5	us
Output Slew Rate	T _S		1.8	4	V/us
Enable to Output Delay	TONEN	f = 10KHz, V _{IN} = 5 Volts, R _L = 1K	0.8	2.5	us
	TOFFEN		100	350	ns

TRUTH TABLE (CH0 – CH15)

A3	A2	A1	A0	$\overline{\text{EN}}$	"ON" CHANNEL 1/
X	X	X	X	H	NONE
L	L	L	L	L	CH0
L	L	L	H	L	CH1
L	L	H	L	L	CH2
L	L	H	H	L	CH3
L	H	L	L	L	CH4
L	H	L	H	L	CH5
L	H	H	L	L	CH6
L	H	H	H	L	CH7
H	L	L	L	L	CH8
H	L	L	H	L	CH9
H	L	H	L	L	CH10
H	L	H	H	L	CH11
H	H	L	L	L	CH12
H	H	L	H	L	CH13
H	H	H	L	L	CH14
H	H	H	H	L	CH15


1/ Between (CH0-CH15) and V_{OUT}

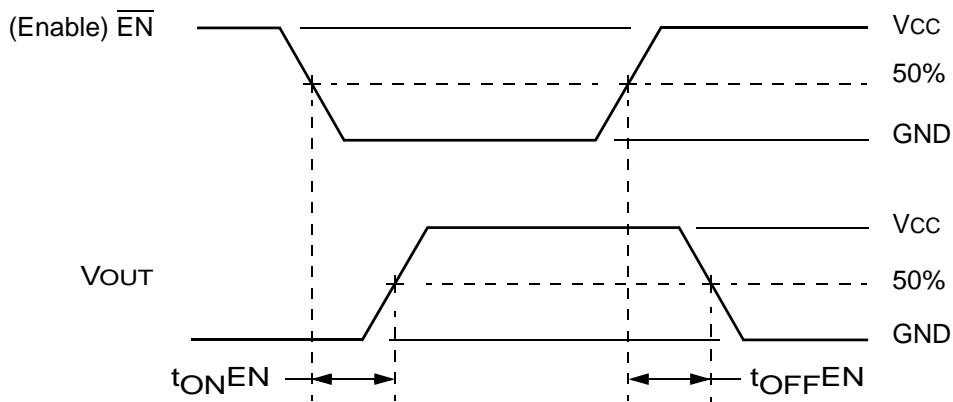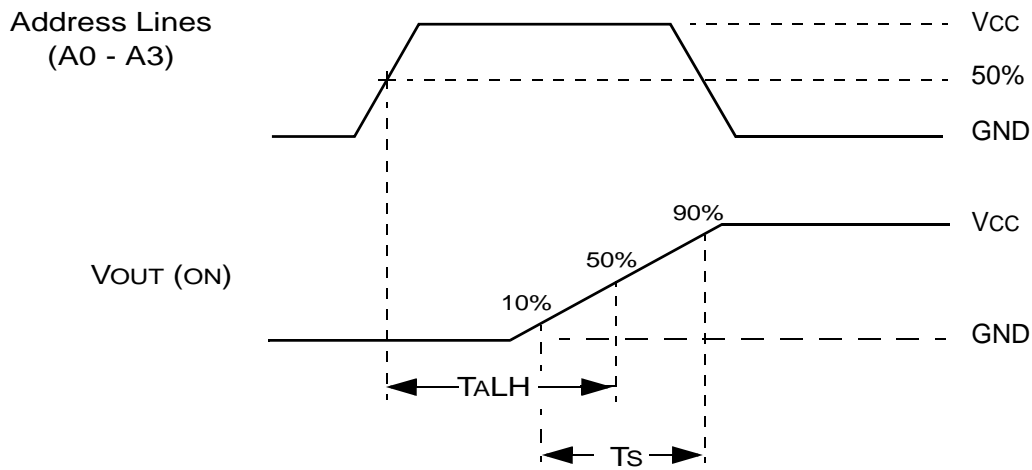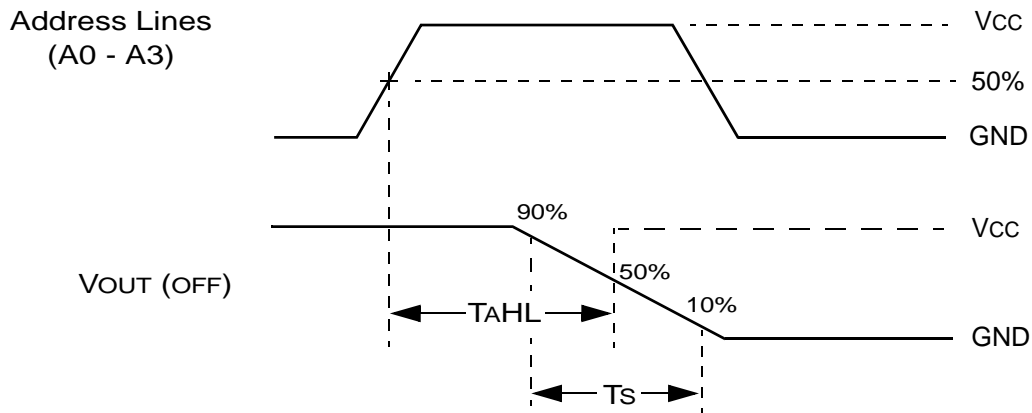

RHD5921 SWITCHING DIAGRAMS

ORDERING INFORMATION

Model	DSCC SMD #	Screening	Package
RHD5921-7	-	Commercial Flow, +25°C testing only	24-pin SOIC
RHD5921-S	-	Military Temperature, -55°C to +125°C Screened in accordance with MIL-PRF-38534, Class K	
RHD5921-201-1S	5962-1024302KXC (Pending)	In accordance with DSCC SMD	
RHD5921-201-2S	5962-1024302KXA (Pending)		
RHD5921-901-1S	5962H1024302KXC (Pending)		
RHD5921-901-2S	5962H1024302KXA (Pending)		

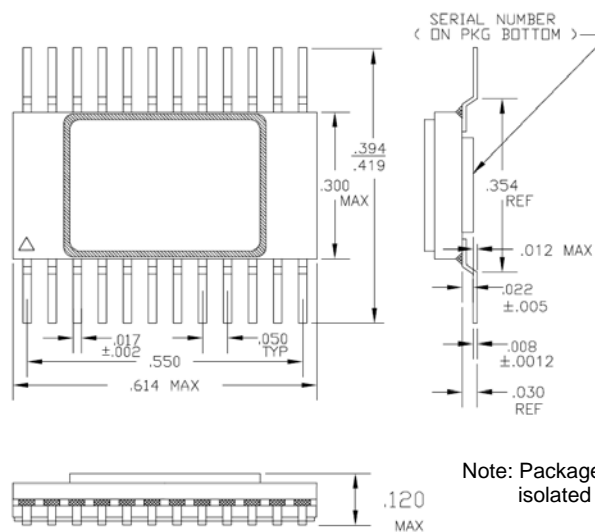

Note: Package and lid are electrically isolated from signal pads.

PACKAGE OUTLINE

EXPORT CONTROL:

This product is controlled for export under the International Traffic in Arms Regulations (ITAR). A license from the U.S. Department of State is required prior to the export of this product from the United States.

EXPORT WARNING:

Aeroflex's military and space products are controlled for export under the International Traffic in Arms Regulations (ITAR) and may not be sold or proposed or offered for sale to certain countries. (See ITAR 126.1 for complete information.)

PLAINVIEW, NEW YORK
Toll Free: 800-THE-1553
Fax: 516-694-6715

INTERNATIONAL
Tel: 805-778-9229
Fax: 805-778-1980

NORTHEAST
Tel: 603-888-3975
Fax: 603-888-4585

SE AND MID-ATLANTIC
Tel: 321-951-4164
Fax: 321-951-4254

WEST COAST
Tel: 949-362-2260
Fax: 949-362-2266

CENTRAL
Tel: 719-594-8017
Fax: 719-594-8468

www.aeroflex.com info-ams@aeroflex.com

Aeroflex Microelectronic Solutions reserves the right to change at any time without notice the specifications, design, function, or form of its products described herein. All parameters must be validated for each customer's application by engineering. No liability is assumed as a result of use of this product. No patent licenses are implied.



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused