

MIL-C-39012/55

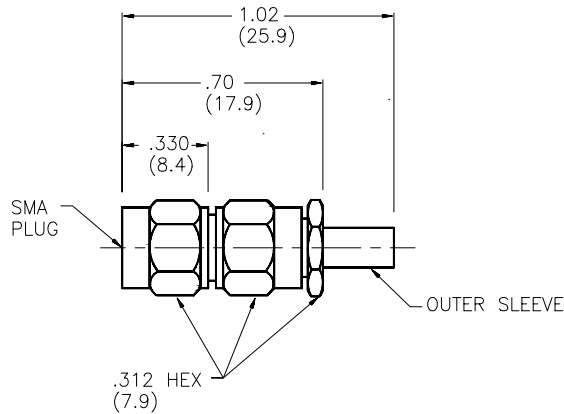


FIGURE 1

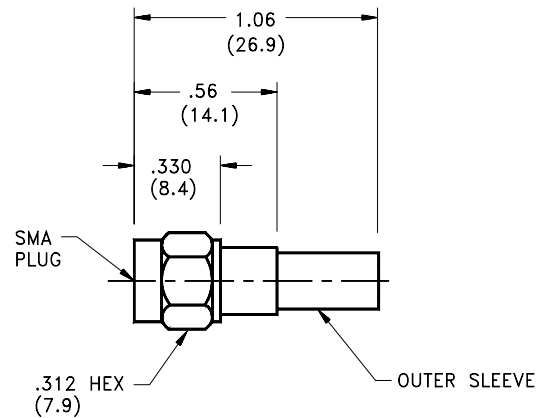


FIGURE 2

MILITARY PART NO.	MIDWEST PART NO.	FIGURE	ASSEMBLY PROCEDURE	CATEGORY	CABLE TYPE	COMMERCIAL ALTERNATE
- 3006	M39012/55-3006	1	SMA -051	A	I	SMA-0196-55-000-02
- 3007	M39012/55-3007	1	SMA -051	A	II	SMA-0188-55-000-02
- 3008*	M39012/55-3008	2	SMA -027	A	III	SMA-0122-55-000-02
- 3009	M39012/55-3009	2	SMA -027	A	IV	SMA-0142-55-000-02
- 3010	M39012/55-3010	2	SMA -027	A	V	SMA-0142-55-000-02
- 3025	M39012/55-3025	1	SMA -051	C	I	SMA-1196-55-000-02
- 3026	M39012/55-3026	1	SMA -051	C	II	SMA-1188-55-000-02
- 3027*	M39012/55-3027	2	SMA -027	C	III	SMA-1122-55-000-02
- 3028	M39012/55-3028	2	SMA -027	C	IX	SMA-1055-55-000-02
- 3029	M39012/55-3029	2	SMA -027	C	X	SMA-1058-55-000-02
- 3030	M39012/55-3030	1	SMA -051	A	XV	SMA-0316-55-000-02
- 3106	M39012/55-3106	1	SMA -051	A	I	SMA-0196-55-000-02
- 3107	M39012/55-3107	1	SMA -051	A	II	SMA-0188-55-000-02
- 3108*	M39012/55-3108	2	SMA -027	A	III	SMA-0122-55-000-02
- 3109	M39012/55-3109	2	SMA -027	A	IV	SMA-0142-55-000-02
- 3110	M39012/55-3110	2	SMA -027	A	V	SMA-0142-55-000-02
- 3125	M39012/55-3125	1	SMA -051	C	I	SMA-1196-55-000-02
- 3126	M39012/55-3126	1	SMA -051	C	II	SMA-1188-55-000-02
- 3127*	M39012/55-3127	2	SMA -027	C	III	SMA-1122-55-000-02
- 3128	M39012/55-3128	2	SMA -027	C	IX	SMA-1055-55-000-02
- 3129	M39012/55-3129	2	SMA -027	C	X	SMA-1058-55-000-02
- 3130	M39012/55-3130	1	SMA -051	A	XV	SMA-0316-55-000-02
- 3502	M39012/55-3502	2	SMA -027	D	XI	SMA-1055-55-000-02
- 3602	M39012/55-3602	2	SMA -027	D	XI	SMA-1055-55-000-02

Notes:

1. Coupling nut is passivated and lockwire safety holes are not used on - 3100 and - 3600 series part numbers.
2. Connector housings are gold plated for soldering of cable outer conductor (Mil-C-39012/55D Amendment 1, Note 9).
3. Category A: solder sleeve; Categories B, C, and D: crimp sleeve.
4. See Appendix for description of connector interfaces, categories and cable types.
5. *Qualification for these items was in process at time of printing, please contact Midwest Microwave for current status.