





## Automotive Transient Voltage Suppressors

**Breakdown Voltage** 6.8 to 43V  
**Peak Pulse Power** 400W

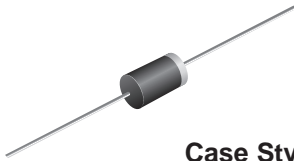

Case Style MPG06

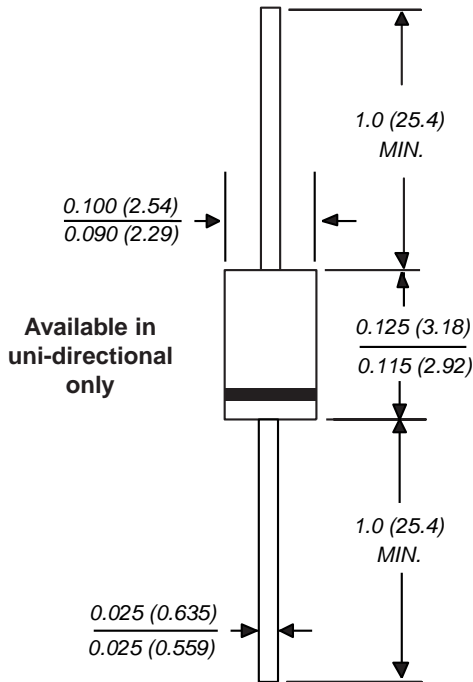

Dimensions in inches and (millimeters)

\* Patent #'s 4,980,315  
5,166,769  
5,278,094

Patented\*

### Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Designed for the hood applications
- Available in uni-directional only
- Exclusive patented PAR<sup>®</sup> oxide passivated chip construction
- 400W peak pulse power capability on 10/1000μs waveform, repetition rate (duty cycle): 1.0%
- Excellent clamping capability
- Low incremental surge resistance
- Very fast response time
- For devices with  $V_{(BR)} \geq 10V$ ,  $I_D$  are typically less than 1.0μA
- High temperature soldering guaranteed: 300°C/10 seconds, 0.375" (9.5mm) lead length, 5lbs. (2.3 kg) tension

### Mechanical Data

**Case:** Molded plastic over passivated junction

**Terminals:** Axial leads, solderable per MIL-STD-750, Method 2026

**Polarity:** Color band denotes positive end (cathode)

**Mounting Position:** Any

**Weight:** 0.0064 oz., 0.181 g

**Packaging codes/options:**

1/5K per Bulk Box, 50K/box

3/3K per Ammo Box (26mm Tape), 60K/box

4/5.5K per 13" Reel (52mm Tape), 22K/box

23/3K per Ammo Box (52mm Tape), 27K/box

50/2.5K per Radial-Tape Ammo Box, 10K/box

### Maximum Ratings and Thermal Characteristics (T<sub>A</sub> = 25°C unless otherwise noted)

Parameter	Symbol	Limit	Unit
Peak power dissipation with a 10/1000μs waveform <sup>(1)</sup> (Fig. 1)	PPPM	Minimum 400	W
Peak pulse power current with a 10/1000μs waveform <sup>(1)(2)</sup> (Fig. 3)	IPPM	See Next Table	A
Steady state power dissipation at T <sub>L</sub> = 75°C lead lengths 0.25" (6.33mm) <sup>(2)</sup>	P <sub>M(AV)</sub>	1.0	W
Peak forward surge current, 8.3ms single half sine-wave <sup>(3)</sup>	I <sub>FSM</sub>	40	A
Maximum instantaneous forward voltage at 25A <sup>(3)</sup>	V <sub>F</sub>	3.5	V
Operating junction and storage temperature range	T <sub>J</sub> , T <sub>STG</sub>	-65 to +185	°C

#### Notes:

(1) Non-repetitive current pulse, per Fig. 3 and derated above T<sub>A</sub> = 25°C per Fig. 2

(2) Mounted on copper pad area of 1.6 x 1.6" (40 x 40mm)

(3) Measured on 8.3ms single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum

# TMPG06-6.8 thru TMPG06-43A



Vishay Semiconductors  
formerly General Semiconductor

## Electrical Characteristics (T<sub>A</sub> = 25°C unless otherwise noted)


Device Type	Breakdown Voltage V <sub>(BR)</sub> <sup>(1)</sup> at I <sub>T</sub> (V)		Test Current I <sub>T</sub> (mA)	Stand-off Voltage V <sub>WM</sub> (Volts)	Maximum Reverse Leakage at V <sub>WM</sub> I <sub>D</sub> (μA)	Maximum Reverse Leakage at V <sub>WM</sub> T <sub>J</sub> =150°C I <sub>D</sub> (μA)	Peak Pulse Current I <sub>PPM</sub> (Note 2) (Amps)	Maximum Clamping Voltage at I <sub>PPM</sub> V <sub>C</sub> (Volts)	Maximum Temp. Coefficient of V <sub>(BR)</sub> (% / °C)
	MIN	MAX							
TMPG06-6.8	6.12	7.48	10.0	5.50	300	1000	27.8	10.8	0.057
TMPG06-6.8A	6.45	7.14	10.0	5.80	300	1000	28.6	10.5	0.057
TMPG06-7.5	6.75	8.25	10.0	6.05	150	500	25.6	11.7	0.060
TMPG06-7.5A	7.13	7.88	10.0	6.40	150	500	26.5	11.3	0.061
TMPG06-8.2	7.38	9.02	10.0	6.63	50.0	200	24.0	12.5	0.065
TMPG06-8.2A	7.79	8.61	10.0	7.02	50.0	200	24.8	12.1	0.065
TMPG06-9.1	8.19	10.0	1.0	7.37	10.0	50.0	21.7	13.8	0.068
TMPG06-9.1A	8.65	9.55	1.0	7.78	10.0	50.0	22.4	13.4	0.068
TMPG06-10	9.00	11.0	1.0	8.10	5.0	20.0	26.7	15.0	0.073
TMPG06-10A	9.50	10.5	1.0	8.55	5.0	20.0	27.6	14.5	0.073
TMPG06-11	9.90	12.1	1.0	8.92	2.0	10.0	24.7	16.2	0.075
TMPG06-11A	10.5	11.6	1.0	9.40	2.0	10.0	25.6	15.6	0.075
TMPG06-12	10.8	13.2	1.0	9.72	1.0	5.0	23.1	17.3	0.076
TMPG06-12A	11.4	12.6	1.0	10.2	1.0	5.0	24.0	16.7	0.078
TMPG06-13	11.7	14.3	1.0	10.5	1.0	5.0	21.1	19.0	0.081
TMPG06-13A	12.4	13.7	1.0	11.1	1.0	5.0	22.0	18.2	0.081
TMPG06-15	13.5	16.3	1.0	12.1	1.0	5.0	18.2	22.0	0.084
TMPG06-15A	14.3	15.8	1.0	12.8	1.0	5.0	18.9	21.2	0.084
TMPG06-16	14.4	17.6	1.0	12.9	1.0	5.0	17.0	23.5	0.086
TMPG06-16A	15.2	16.8	1.0	13.6	1.0	5.0	17.8	22.5	0.086
TMPG06-18	16.2	19.8	1.0	14.5	1.0	5.0	15.1	26.5	0.088
TMPG06-18A	17.1	18.9	1.0	15.3	1.0	5.0	15.9	25.5	0.088
TMPG06-20	18.0	22.0	1.0	16.2	1.0	5.0	13.7	29.1	0.090
TMPG06-20A	19.0	21.0	1.0	17.0	1.0	5.0	14.4	27.7	0.090
TMPG06-22	19.8	24.2	1.0	17.8	1.0	5.0	12.5	31.9	0.092
TMPG06-22A	20.9	23.1	1.0	18.8	1.0	5.0	13.1	30.6	0.092
TMPG06-24	21.6	26.4	1.0	19.4	1.0	5.0	11.5	34.2	0.094
TMPG06-24A	22.8	25.2	1.0	20.5	1.0	5.0	12.0	33.2	0.094
TMPG06-27	24.3	29.7	1.0	21.8	1.0	5.0	10.2	39.1	0.096
TMPG06-27A	25.7	28.4	1.0	23.1	1.0	5.0	10.7	37.5	0.096
TMPG06-30	27.0	33.0	1.0	24.3	1.0	5.0	9.2	43.5	0.097
TMPG06-30A	28.5	31.5	1.0	25.6	1.0	5.0	9.7	41.4	0.097
TMPG06-33	29.7	36.3	1.0	26.8	1.0	5.0	8.4	47.7	0.098
TMPG06-33A	31.4	34.7	1.0	28.2	1.0	5.0	8.8	45.7	0.098
TMPG06-36	32.4	39.6	1.0	29.1	1.0	5.0	7.7	52.0	0.099
TMPG06-36A	34.2	37.8	1.0	30.8	1.0	5.0	8.0	49.9	0.099
TMPG06-39	35.1	42.9	1.0	31.6	1.0	5.0	7.1	56.4	0.100
TMPG06-39A	37.1	41.0	1.0	33.3	1.0	5.0	7.4	53.9	0.100
TMPG06-43	38.7	47.3	1.0	34.8	1.0	5.0	6.5	61.9	0.101
TMPG06-43A	40.9	45.2	1.0	36.8	1.0	5.0	6.7	59.3	0.101

- Notes: (1) V<sub>(BR)</sub> measured after I<sub>T</sub> applied for 300μs, I<sub>T</sub> = square wave pulse or equivalent  
 (2) Surge current waveform per Fig. 3 and derated per Fig. 2  
 (3) All terms and symbols are consistent with ANSI/IEEE C62.35




**Ratings and Characteristic Curves** ( $T_A = 25^\circ\text{C}$  unless otherwise noted)


**Fig. 1 – Peak Pulse Power Rating Curve**

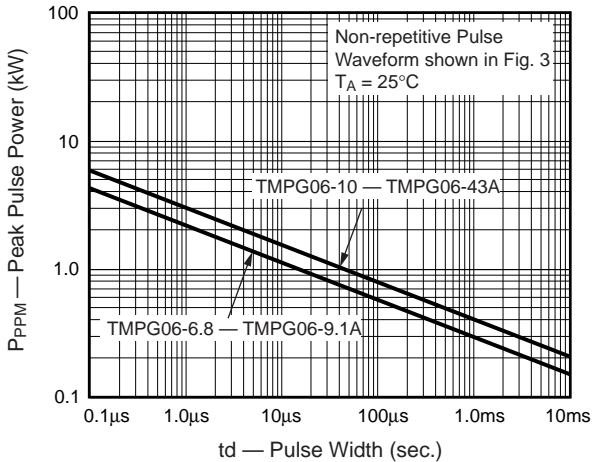


**Fig. 2 – Pulse Derating Curve**

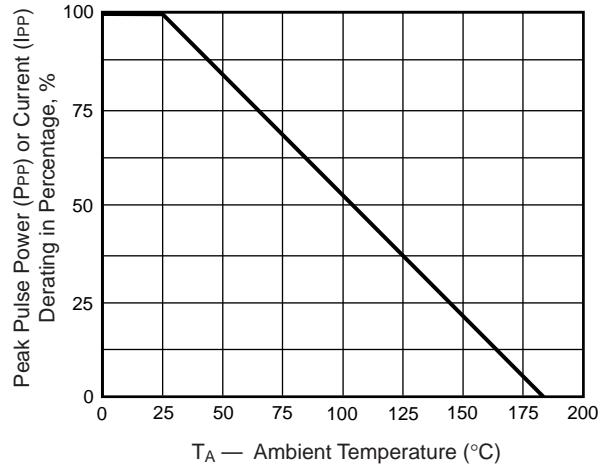


**Fig. 3 – Pulse Waveform**

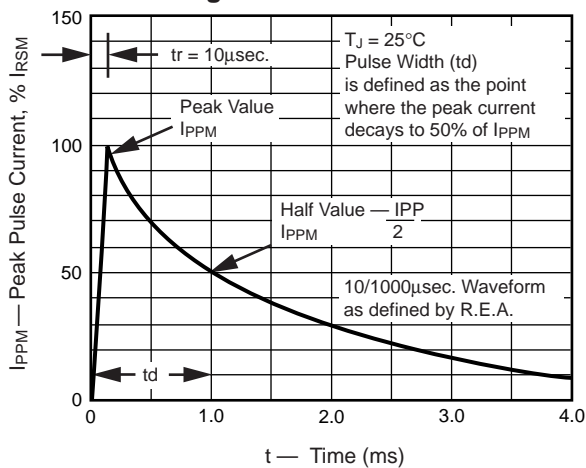


**Fig. 4 – Typical Junction Capacitance**

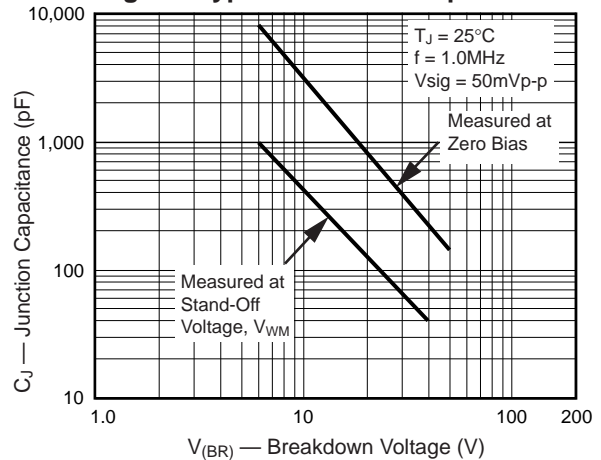

**Fig. 5 – Steady State Power Derating Curve**

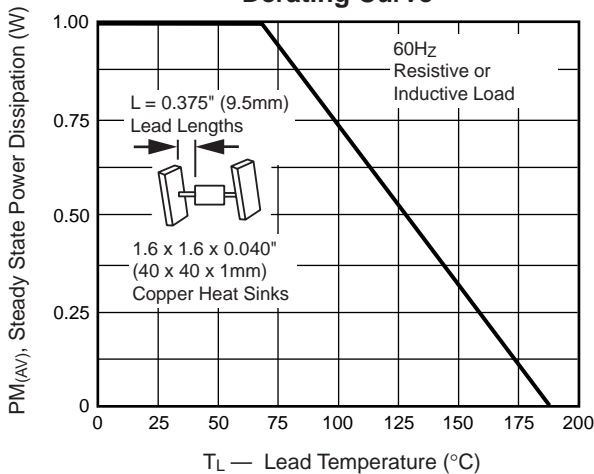

**Fig. 6 - Maximum Non-Repetitive Forward Surge Current**

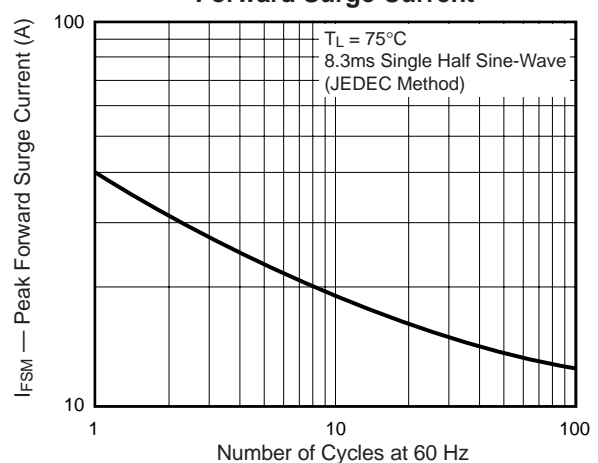



## **Notice**

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.