


1.00mm Pitch

Series 6232




LIF Right Angle Through-Hole (Bottom Contact)

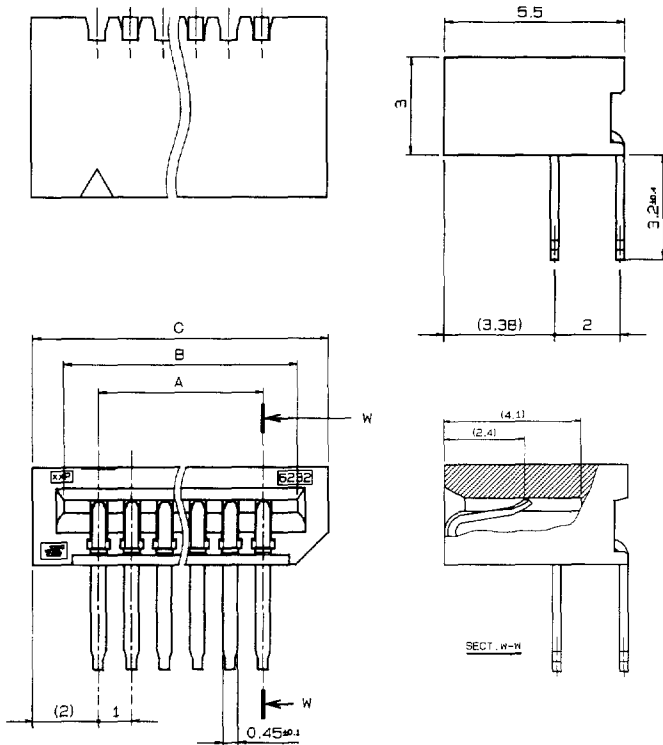


Specifications

- Number of Contacts – 3-30
- Tray Packaged or SMT Tape and Reel
- Voltage – 50 V
- Current Rating – 0.50 amp max.
- Dielectric Withstanding Voltage – 500V RMS min.
- Operating Temperature – (-20°C - +70°C)
- Contact Material – phosphor bronze (tin-lead plated)
- Insulator Material – glass filled PPS or Nylon
- FFC/FPC Thickness – 0.3 ±0.05 mm (0.012 ±0.002")
- Profile Height – 3.0mm – 5.1mm (see sketch)

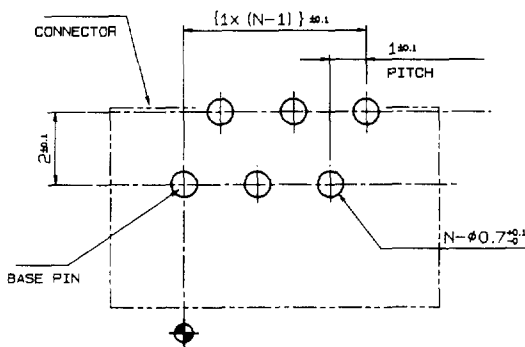

MOUNTING LAYOUT

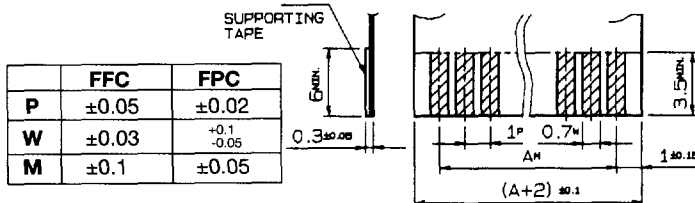

FFC, FPC SPECIFICATION

ORDERING CODE

00 6232 OXX 104 800

TRAY PACKAGE NUMBER OF CONTACTS (03-30)

PART NUMBER	NO. OF CONTACTS	A	B	C	QTY. PER TRAY
00 6232 003 104 800	3	2.0	4.12	6.0	600
004	4	3.0	5.12	7.0	510
005	5	4.0	6.12	8.0	450
006	6	5.0	7.12	9.0	400
007	7	6.0	8.12	10.0	360
008	8	7.0	9.12	11.0	320
009	9	8.0	10.12	12.0	300
010	10	9.0	11.12	13.0	270
011	11	10.0	12.12	14.0	250
012	12	11.0	13.12	15.0	240
013	13	12.0	14.12	16.0	220
014	14	13.0	15.12	17.0	210
015	15	14.0	16.12	18.0	200
016	16	15.0	17.12	19.0	190
017	17	16.0	18.12	20.0	180
018	18	17.0	19.12	21.0	170
019	19	18.0	20.12	22.0	160
020	20	19.0	21.12	23.0	150
021	21	20.0	22.12	24.0	150
022	22	21.0	23.12	25.0	140
023	23	22.0	24.12	26.0	130
024	24	23.0	25.12	27.0	130
025	25	24.0	26.12	28.0	120
026	26	25.0	27.12	29.0	120
027	27	26.0	28.12	30.0	120
028	28	27.0	29.12	31.0	110
029	29	28.0	30.12	32.0	110
00 6232 030 104 800	30	29.0	31.12	33.0	100

(Dimensions: mm)