

Document Title

512Kx8 Bit High Speed Static RAM(5V Operating), Revolutionary Pin out.  
Operated at Commercial Temperature Range.

Revision History

| <u>RevNo.</u> | <u>History</u>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | <u>Draft Data</u>                  | <u>Remark</u>                        |                                    |     |               |               |                |             |            |     |             |            |           |             |            |            |             |            |     |           |          |                 |             |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|--------------------------------------|------------------------------------|-----|---------------|---------------|----------------|-------------|------------|-----|-------------|------------|-----------|-------------|------------|------------|-------------|------------|-----|-----------|----------|-----------------|-------------|
| Rev. 0.0      | Initial release with Design Target.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Jun. 14th, 1996                    | Design Target                        |                                    |     |               |               |                |             |            |     |             |            |           |             |            |            |             |            |     |           |          |                 |             |
| Rev. 0.5      | Release to Preliminary Data Sheet.<br>0.1. Replace Design Target to Preliminary.<br>0.2. Delete 12ns part but add 17ns part.<br>0.3. Relax D.C and A.C parameters and insert new parameter(Icc1) with the test condition.<br>0.3.1. Insert Icc1 parameter with the test condition as address is increased with binary count.<br>0.3.2. Relax D.C and A.C parameters.<br><table><tr><td>Items</td><td>Previous spec.<br/>(15/ - /20ns part)</td><td>Relaxed spec.<br/>(15/17/20ns part)</td></tr><tr><td>Icc</td><td>190/ - /180mA</td><td>220/215/210mA</td></tr><tr><td>tcw</td><td>10/ - /12ns</td><td>12/13/14ns</td></tr><tr><td>tAW</td><td>10/ - /12ns</td><td>12/13/14ns</td></tr><tr><td>tWP(OE=H)</td><td>10/ - /12ns</td><td>12/13/14ns</td></tr><tr><td>tWP1(OE=L)</td><td>12/ - /14ns</td><td>15/17/20ns</td></tr><tr><td>tdw</td><td>7/ - /9ns</td><td>8/9/10ns</td></tr></table> | Items                              | Previous spec.<br>(15/ - /20ns part) | Relaxed spec.<br>(15/17/20ns part) | Icc | 190/ - /180mA | 220/215/210mA | tcw            | 10/ - /12ns | 12/13/14ns | tAW | 10/ - /12ns | 12/13/14ns | tWP(OE=H) | 10/ - /12ns | 12/13/14ns | tWP1(OE=L) | 12/ - /14ns | 15/17/20ns | tdw | 7/ - /9ns | 8/9/10ns | Sep. 16th, 1996 | Preliminary |
| Items         | Previous spec.<br>(15/ - /20ns part)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Relaxed spec.<br>(15/17/20ns part) |                                      |                                    |     |               |               |                |             |            |     |             |            |           |             |            |            |             |            |     |           |          |                 |             |
| Icc           | 190/ - /180mA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 220/215/210mA                      |                                      |                                    |     |               |               |                |             |            |     |             |            |           |             |            |            |             |            |     |           |          |                 |             |
| tcw           | 10/ - /12ns                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 12/13/14ns                         |                                      |                                    |     |               |               |                |             |            |     |             |            |           |             |            |            |             |            |     |           |          |                 |             |
| tAW           | 10/ - /12ns                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 12/13/14ns                         |                                      |                                    |     |               |               |                |             |            |     |             |            |           |             |            |            |             |            |     |           |          |                 |             |
| tWP(OE=H)     | 10/ - /12ns                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 12/13/14ns                         |                                      |                                    |     |               |               |                |             |            |     |             |            |           |             |            |            |             |            |     |           |          |                 |             |
| tWP1(OE=L)    | 12/ - /14ns                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 15/17/20ns                         |                                      |                                    |     |               |               |                |             |            |     |             |            |           |             |            |            |             |            |     |           |          |                 |             |
| tdw           | 7/ - /9ns                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 8/9/10ns                           |                                      |                                    |     |               |               |                |             |            |     |             |            |           |             |            |            |             |            |     |           |          |                 |             |
| Rev. 1.0      | Release to Final Data Sheet.<br>1.1. Delete Preliminary.<br>1.2. Delete Icc1 parameter with the test condition.<br>1.3. Update D.C parameters.<br><table><tr><td>Items</td><td>Previous spec.<br/>(15/17/20ns part)</td><td>Updated spec.<br/>(15/17/20ns part)</td></tr><tr><td>Icc</td><td>220/215/210mA</td><td>170/165/160mA</td></tr></table><br>1.4. Add the test condition for VOH1 with Vcc=5V±5% at 25°C<br>1.5. Add timing <u>diagram</u> to define tWP as "(Timing Wave Form of Write Cycle(CS=Low fixed))"                                                                                                                                                                                                                                                                                                                                                                         | Items                              | Previous spec.<br>(15/17/20ns part)  | Updated spec.<br>(15/17/20ns part) | Icc | 220/215/210mA | 170/165/160mA | Jun. 5th, 1997 | Final       |            |     |             |            |           |             |            |            |             |            |     |           |          |                 |             |
| Items         | Previous spec.<br>(15/17/20ns part)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Updated spec.<br>(15/17/20ns part) |                                      |                                    |     |               |               |                |             |            |     |             |            |           |             |            |            |             |            |     |           |          |                 |             |
| Icc           | 220/215/210mA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 170/165/160mA                      |                                      |                                    |     |               |               |                |             |            |     |             |            |           |             |            |            |             |            |     |           |          |                 |             |
| Rev. 2.0      | 2.1 Add extended and industrial temperature range parts.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Jun. 5th, 1997                     | Final                                |                                    |     |               |               |                |             |            |     |             |            |           |             |            |            |             |            |     |           |          |                 |             |

The attached data sheets are prepared and approved by SAMSUNG Electronics. SAMSUNG Electronics CO., LTD. reserve the right to change the specifications. SAMSUNG Electronics will evaluate and reply to your requests and questions on the parameters of this device. If you have any questions, please contact the SAMSUNG branch office near your office, call or contact Headquarters.

## 512K x 8 Bit High-Speed CMOS Static RAM


### FEATURES

- Fast Access Time 15,17,20ns(Max.)
- Low Power Dissipation
  - Standby (TTL) : 50mA(Max.)
  - (CMOS) : 10mA(Max.)
  - Operating KM684002A - 15 : 170mA(Max.)
  - KM684002A - 17 : 165mA(Max.)
  - KM684002A - 20 : 160mA(Max.)
- Single 5.0V±10% Power Supply
- TTL Compatible Inputs and Outputs
- I/O Compatible with 3.3V Device
- Fully Static Operation
  - No Clock or Refresh required
- Three State Outputs
- Center Power/Ground Pin Configuration
- Standard Pin Configuration
  - KM684002AJ : 36-SOJ-400

### ORDERING INFORMATION

|                     |                  |
|---------------------|------------------|
| KM684002A-15/17/20  | Commercial Temp. |
| KM684002AE-15/17/20 | Extended Temp.   |
| KM684002AI-15/17/20 | Industrial Temp. |


### FUNCTIONAL BLOCK DIAGRAM

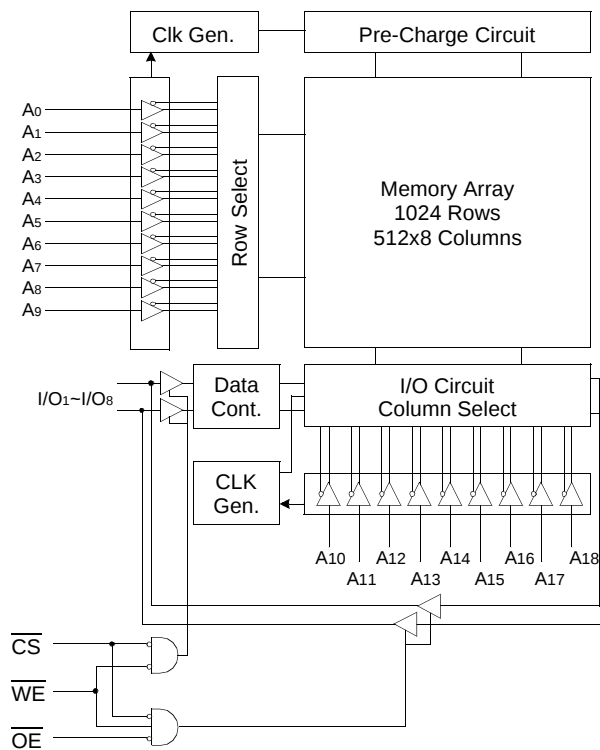

### GENERAL DESCRIPTION

The KM684002A is a 4,194,304-bit high-speed Static Random Access Memory organized as 524,288 words by 8 bits. The KM684002A uses 8 common input and output lines and has an output enable pin which operates faster than address access time at read cycle. The device is fabricated using SAMSUNG's advanced CMOS process and designed for high-speed circuit technology. It is particularly well suited for use in high-density high-speed system applications. The KM684002A is packaged in a 400mil 36-pin plastic SOJ.

### PIN CONFIGURATION(Top View)

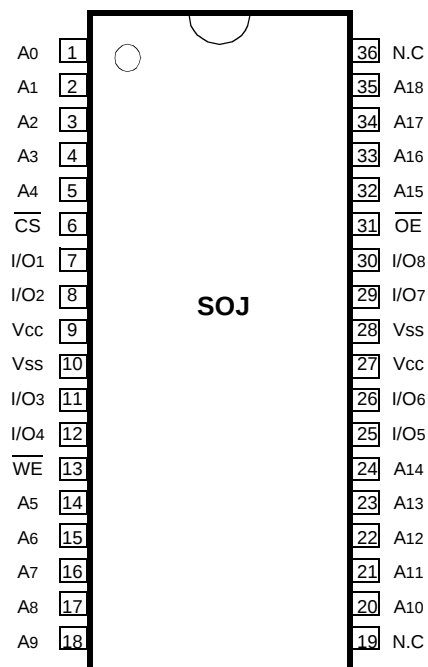

### PIN FUNCTION

| Pin Name        | Pin Function        |
|-----------------|---------------------|
| A0 - A18        | Address Inputs      |
| $\overline{WE}$ | Write Enable        |
| $\overline{CS}$ | Chip Select         |
| $\overline{OE}$ | Output Enable       |
| I/O1 ~ I/O8     | Data Inputs/Outputs |
| Vcc             | Power(+5.0V)        |
| Vss             | Ground              |
| N.C             | No Connection       |

**ABSOLUTE MAXIMUM RATINGS\***

| Parameter                                                     |            | Symbol                             | Rating      | Unit |
|---------------------------------------------------------------|------------|------------------------------------|-------------|------|
| Voltage on Any Pin Relative to V <sub>SS</sub>                |            | V <sub>IN</sub> , V <sub>OUT</sub> | -0.5 to 7.0 | V    |
| Voltage on V <sub>CC</sub> Supply Relative to V <sub>SS</sub> |            | V <sub>CC</sub>                    | -0.5 to 7.0 | V    |
| Power Dissipation                                             |            | P <sub>D</sub>                     | 1.0         | W    |
| Storage Temperature                                           |            | T <sub>STG</sub>                   | -65 to 150  | °C   |
| Operating Temperature                                         | Commercial | T <sub>A</sub>                     | 0 to 70     | °C   |
|                                                               | Extended   | T <sub>A</sub>                     | -25 to 85   | °C   |
|                                                               | Industrial | T <sub>A</sub>                     | -40 to 85   | °C   |

\* Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operating sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

**RECOMMENDED DC OPERATING CONDITIONS**(T<sub>A</sub>=0 to 70°C)

| Parameter          | Symbol          | Min   | Typ | Max                    | Unit |
|--------------------|-----------------|-------|-----|------------------------|------|
| Supply Voltage     | V <sub>CC</sub> | 4.5   | 5.0 | 5.5                    | V    |
| Ground             | V <sub>SS</sub> | 0     | 0   | 0                      | V    |
| Input High Voltage | V <sub>IH</sub> | 2.2   | -   | V <sub>CC</sub> +0.5** | V    |
| Input Low Voltage  | V <sub>IL</sub> | -0.5* | -   | 0.8                    | V    |

NOTE: The above parameters are also guaranteed at extended and industrial temperature ranges.

\* V<sub>IL</sub>(Min) = -2.0V a.c (Pulse Width ≤ 10ns) for I ≤ 20mA

\*\* V<sub>IH</sub>(Max) = V<sub>CC</sub> + 2.0V a.c (Pulse Width ≤ 10ns) for I ≤ 20mA

**DC AND OPERATING CHARACTERISTICS**(T<sub>A</sub>=0 to 70°C, V<sub>CC</sub>=5.0V±10%, unless otherwise specified)

| Parameter                 | Symbol             | Test Conditions                                                                                                           |      | Min | Max  | Unit |
|---------------------------|--------------------|---------------------------------------------------------------------------------------------------------------------------|------|-----|------|------|
| Input Leakage Current     | I <sub>LI</sub>    | V <sub>IN</sub> =V <sub>SS</sub> to V <sub>CC</sub>                                                                       |      | -2  | 2    | μA   |
| Output Leakage Current    | I <sub>LO</sub>    | CS=V <sub>IH</sub> or OE=V <sub>IH</sub> or WE=V <sub>IL</sub><br>V <sub>OUT</sub> =V <sub>SS</sub> to V <sub>CC</sub>    |      | -2  | 2    | μA   |
| Operating Current         | I <sub>CC</sub>    | Min. Cycle, 100% Duty<br>CS=V <sub>IL</sub> , V <sub>IN</sub> =V <sub>IH</sub> or V <sub>IL</sub> , I <sub>OUT</sub> =0mA | 15ns | -   | 170  | mA   |
|                           |                    |                                                                                                                           | 17ns | -   | 165  |      |
|                           |                    |                                                                                                                           | 20ns | -   | 160  |      |
| Standby Current           | I <sub>SB</sub>    | Min. Cycle, CS=V <sub>IH</sub>                                                                                            |      | -   | 50   | mA   |
|                           | I <sub>SB1</sub>   | f=0MHz, CS≥V <sub>CC</sub> -0.2V,<br>V <sub>IN</sub> ≥V <sub>CC</sub> -0.2V or V <sub>IN</sub> ≤0.2V                      |      | -   | 10   |      |
| Output Low Voltage Level  | V <sub>OL</sub>    | I <sub>OL</sub> =8mA                                                                                                      |      | -   | 0.4  | V    |
| Output High Voltage Level | V <sub>OH</sub>    | I <sub>OH</sub> =-4mA                                                                                                     |      | 2.4 | -    | V    |
|                           | V <sub>OH1</sub> * | I <sub>OH1</sub> =-100μA                                                                                                  |      | -   | 3.95 |      |

NOTE: The above parameters are also guaranteed at extended and industrial temperature ranges.

\* V<sub>CC</sub>=5.0V, Temp.=25°C

**CAPACITANCE\***(T<sub>A</sub>=25°C, f=1.0MHz)

| Item                     | Symbol           | Test Conditions      | MIN | Max | Unit |
|--------------------------|------------------|----------------------|-----|-----|------|
| Input/Output Capacitance | C <sub>I/O</sub> | V <sub>I/O</sub> =0V | -   | 8   | pF   |
| Input Capacitance        | C <sub>IN</sub>  | V <sub>IN</sub> =0V  | -   | 7   | pF   |

\* NOTE : Capacitance is sampled and not 100% tested.


## AC CHARACTERISTICS (T<sub>A</sub>=0 to 70°C, V<sub>CC</sub>=5.0V±10%, unless otherwise noted.)

### TEST CONDITIONS

| Parameter                                | Value     |
|------------------------------------------|-----------|
| Input Pulse Levels                       | 0V to 3V  |
| Input Rise and Fall Times                | 3ns       |
| Input and Output timing Reference Levels | 1.5V      |
| Output Loads                             | See below |


NOTE: The above parameters are also guaranteed at extended and industrial temperature ranges.

Output Loads(A)



Output Loads(B)

for t<sub>HZ</sub>, t<sub>LZ</sub>, t<sub>WHZ</sub>, t<sub>OW</sub>, t<sub>OLZ</sub> & t<sub>OHZ</sub>



\* Including Scope and Jig Capacitance

### READ CYCLE

| Parameter                         | Symbol           | KM684002A-15 |     | KM684002A-17 |     | KM684002A-20 |     | Unit |
|-----------------------------------|------------------|--------------|-----|--------------|-----|--------------|-----|------|
|                                   |                  | Min          | Max | Min          | Max | Min          | Max |      |
| Read Cycle Time                   | t <sub>RC</sub>  | 15           | -   | 17           | -   | 20           | -   | ns   |
| Address Access Time               | t <sub>AA</sub>  | -            | 15  | -            | 17  | -            | 20  | ns   |
| Chip Select to Output             | t <sub>CO</sub>  | -            | 15  | -            | 17  | -            | 20  | ns   |
| Output Enable to Valid Output     | t <sub>OE</sub>  | -            | 7   | -            | 8   | -            | 9   | ns   |
| Chip Enable to Low-Z Output       | t <sub>LZ</sub>  | 3            | -   | 3            | -   | 3            | -   | ns   |
| Output Enable to Low-Z Output     | t <sub>OLZ</sub> | 0            | -   | 0            | -   | 0            | -   | ns   |
| Chip Disable to High-Z Output     | t <sub>HZ</sub>  | 0            | 7   | 0            | 8   | 0            | 9   | ns   |
| Output Disable to High-Z Output   | t <sub>OHZ</sub> | 0            | 7   | 0            | 8   | 0            | 9   | ns   |
| Output Hold from Address Change   | t <sub>OH</sub>  | 3            | -   | 3            | -   | 3            | -   | ns   |
| Chip Selection to Power Up Time   | t <sub>PU</sub>  | 0            | -   | 0            | -   | 0            | -   | ns   |
| Chip Selection to Power Down Time | t <sub>PD</sub>  | -            | 15  | -            | 17  | -            | 20  | ns   |



NOTE: The above parameters are also guaranteed at extended and industrial temperature ranges.

## WRITE CYCLE

| Parameter                                       | Symbol           | KM684002A-15 |     | KM684002A-17 |     | KM684002A-20 |     | Unit |
|-------------------------------------------------|------------------|--------------|-----|--------------|-----|--------------|-----|------|
|                                                 |                  | Min          | Max | Min          | Max | Min          | Max |      |
| Write Cycle Time                                | t <sub>WC</sub>  | 15           | -   | 17           | -   | 20           | -   | ns   |
| Chip Select to End of Write                     | t <sub>CW</sub>  | 12           | -   | 13           | -   | 14           | -   | ns   |
| Address Set-up Time                             | t <sub>AS</sub>  | 0            | -   | 0            | -   | 0            | -   | ns   |
| Address Valid to End of Write                   | t <sub>AW</sub>  | 12           | -   | 13           | -   | 14           | -   | ns   |
| Write Pulse Width( $\overline{\text{OE}}$ High) | t <sub>WP</sub>  | 12           | -   | 13           | -   | 14           | -   | ns   |
| Write Pulse Width( $\overline{\text{OE}}$ Low)  | t <sub>WP1</sub> | 15           | -   | 17           | -   | 20           | -   | ns   |
| Write Recovery Time                             | t <sub>WR</sub>  | 0            | -   | 0            | -   | 0            | -   | ns   |
| Write to Output High-Z                          | t <sub>WHZ</sub> | 0            | 7   | 0            | 8   | 0            | 9   | ns   |
| Data to Write Time Overlap                      | t <sub>DW</sub>  | 8            | -   | 9            | -   | 10           | -   | ns   |
| Data Hold from Write Time                       | t <sub>DH</sub>  | 0            | -   | 0            | -   | 0            | -   | ns   |
| End Write to Output Low-Z                       | t <sub>OW</sub>  | 3            | -   | 3            | -   | 3            | -   | ns   |

NOTE: The above parameters are also guaranteed at extended and industrial temperature ranges.


## TIMMING DIAGRAMS

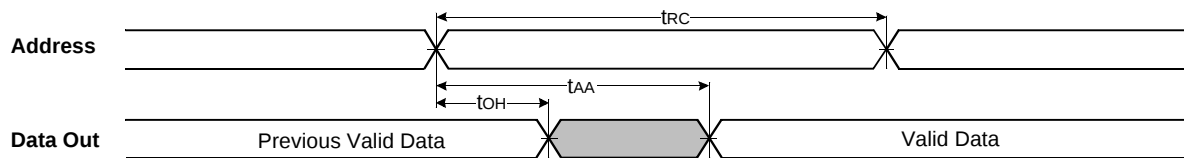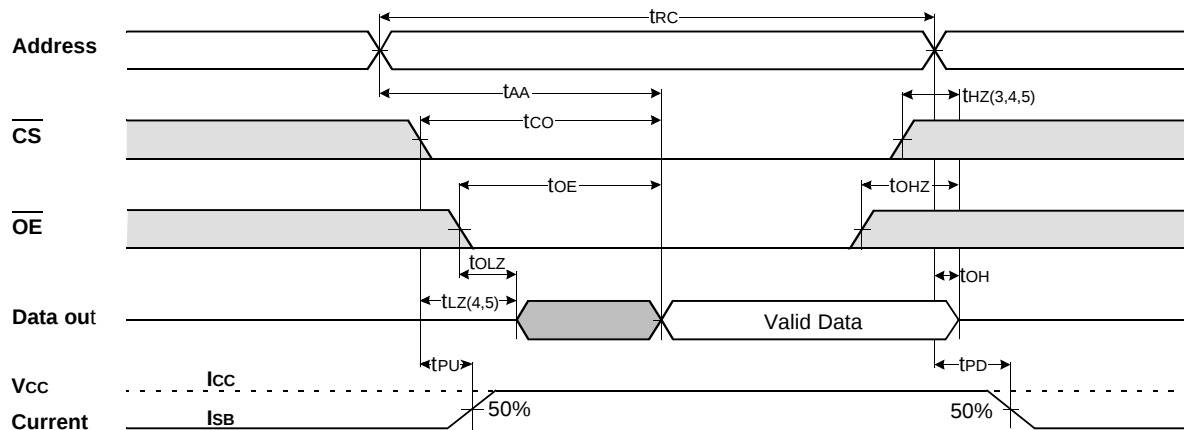TIMING WAVEFORM OF READ CYCLE(1) (Address Controlled,  $\overline{\text{CS}}=\overline{\text{OE}}=V_{\text{IL}}$ ,  $\overline{\text{WE}}=V_{\text{IH}}$ )TIMING WAVEFORM OF READ CYCLE(2) ( $\overline{\text{WE}}=V_{\text{IH}}$ )


**NOTES(READ CYCLE)**


1.  $\overline{WE}$  is high for read cycle.
2. All read cycle timing is referenced from the last valid address to the first transition address.
3.  $t_{HZ}$  and  $t_{OHZ}$  are defined as the time at which the outputs achieve the open circuit condition and are not referenced to  $V_{OH}$  or  $V_{OL}$  levels.
4. At any given temperature and voltage condition,  $t_{HZ}(\text{Max.})$  is less than  $t_{LZ}(\text{Min.})$  both for a given device and from device to device.
5. Transition is measured  $\pm 200\text{mV}$  from steady state voltage with Load(B). This parameter is sampled and not 100% tested.
6. Device is continuously selected with  $\overline{CS} = V_{IL}$ .
7. Address valid prior to coincident with  $\overline{CS}$  transition low.
8. For common I/O applications, minimization or elimination of bus contention conditions is necessary during read and write cycle.

**TIMING WAVEFORM OF WRITE CYCLE(1) ( $\overline{OE} = \text{Clock}$ )**

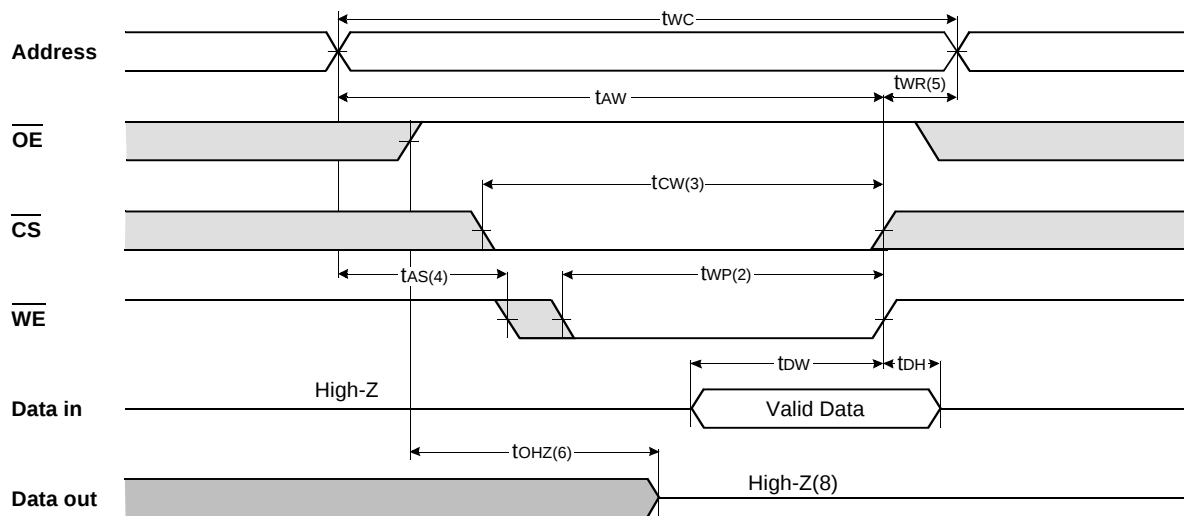

**TIMING WAVEFORM OF WRITE CYCLE(2) ( $\overline{OE} = \text{Low Fixed}$ )**

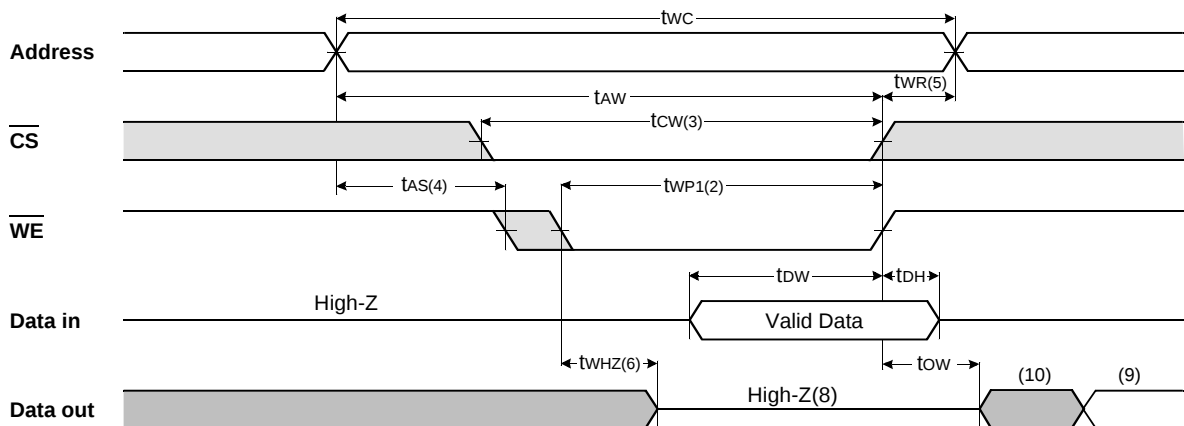

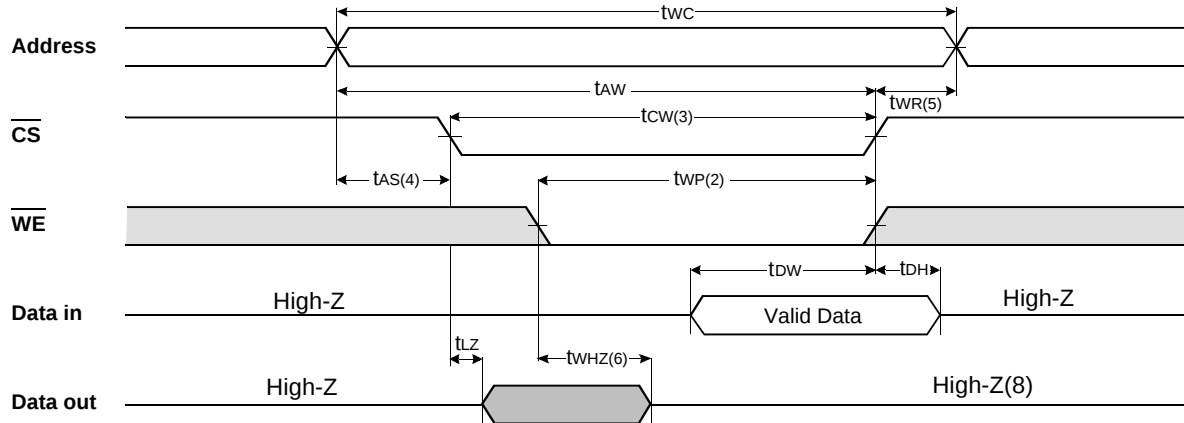TIMING WAVEFORM OF WRITE CYCLE(3) ( $\overline{\text{CS}}$  = Controlled)

## NOTES(WRITE CYCLE)

1. All write cycle timing is referenced from the last valid address to the first transition address.
2. A write occurs during the overlap of a low  $\overline{\text{CS}}$  and  $\overline{\text{WE}}$ . A write begins at the latest transition  $\overline{\text{CS}}$  going low and  $\overline{\text{WE}}$  going low ; A write ends at the earliest transition  $\overline{\text{CS}}$  going high or  $\overline{\text{WE}}$  going high.  $t_{WP}$  is measured from the beginning of write to the end of write.
3.  $t_{CW}$  is measured from the later of  $\overline{\text{CS}}$  going low to end of write.
4.  $t_{AS}$  is measured from the address valid to the beginning of write.
5.  $t_{WR}$  is measured from the end of write to the address change.  $t_{WR}$  applied in case a write ends as  $\overline{\text{CS}}$  or  $\overline{\text{WE}}$  going high.
6. If  $\overline{\text{OE}}$ ,  $\overline{\text{CS}}$  and  $\overline{\text{WE}}$  are in the Read Mode during this period, the I/O pins are in the output low-Z state. Inputs of opposite phase of the output must not be applied because bus contention can occur.
7. For common I/O applications, minimization or elimination of bus contention conditions is necessary during read and write cycle.
8. If  $\overline{\text{CS}}$  goes low simultaneously with  $\overline{\text{WE}}$  going or after  $\overline{\text{WE}}$  going low, the outputs remain high impedance state.
9. DOUT is the read data of the new address.
10. When  $\overline{\text{CS}}$  is low : I/O pins are in the output state. The input signals in the opposite phase leading to the output should not be applied.

## FUNCTIONAL DESCRIPTION

| $\overline{\text{CS}}$ | $\overline{\text{WE}}$ | $\overline{\text{OE}}$ | Mode           | I/O Pin | Supply Current       |
|------------------------|------------------------|------------------------|----------------|---------|----------------------|
| H                      | X                      | X*                     | Not Select     | High-Z  | $I_{SB}$ , $I_{SB1}$ |
| L                      | H                      | H                      | Output Disable | High-Z  | $I_{CC}$             |
| L                      | H                      | L                      | Read           | DOUT    | $I_{CC}$             |
| L                      | L                      | X                      | Write          | DIN     | $I_{CC}$             |

\* NOTE : X means Don't Care.

## PACKAGE DIMENSIONS

## 36-SOJ-400

Units: millimeters/Inches

