

SERIES 360 PIN HEADER

.025 IN. [0.64 MM] SQ. POST
.100 IN. [2.54 MM] PITCH

TYPE
PSS
PSR
PDS
PDR

- .025 IN [0.64 MM] SQUARE POST ON
.100 IN [2.54 MM] CENTERLINE PITCH
- MOLDED WITH STANDOFFS
- UP TO 40 PIN POSITIONS AVAILABLE SINGLE
IN LINE AND 80 POSITIONS DUAL IN LINE
- X/Y STACKABLE





TECHNICAL SPECIFICATIONS

MATERIAL DATA

INSULATOR.....GLASS FILLED POLYESTER
UL RATING.....94V-0
TERMINAL.....BRASS
PLATING.....GOLD OVER NICKEL OR TIN

ELECTRICAL DATA

OPERATING
TEMPERATURE.....-55°C TO +105°C
VOLTAGE RATING.....1000 VAC RMS FOR 1 MIN.
CURRENT RATING 3A
INSULATION
RESISTANCE.....1000 MEGOHMS

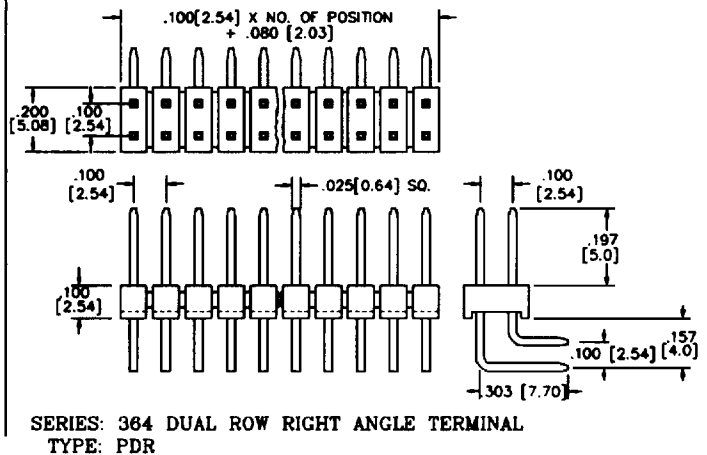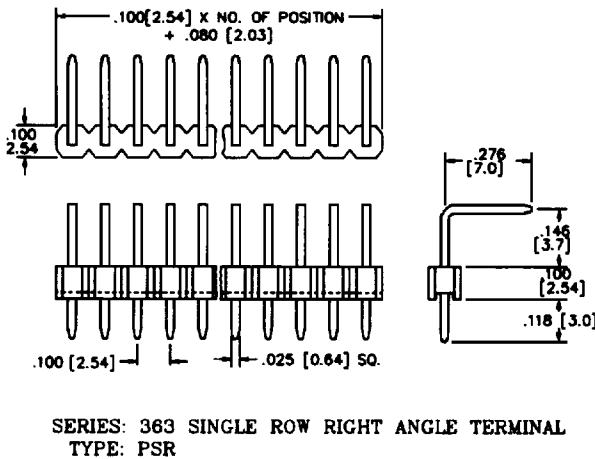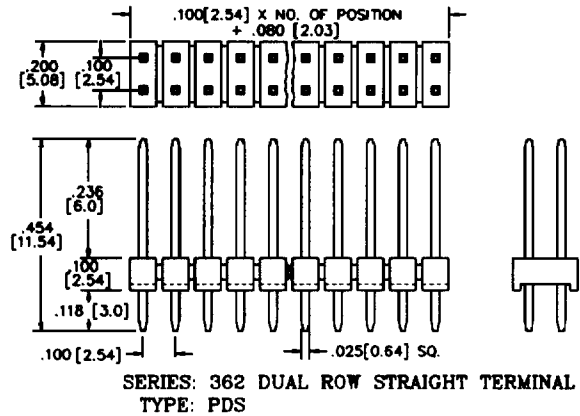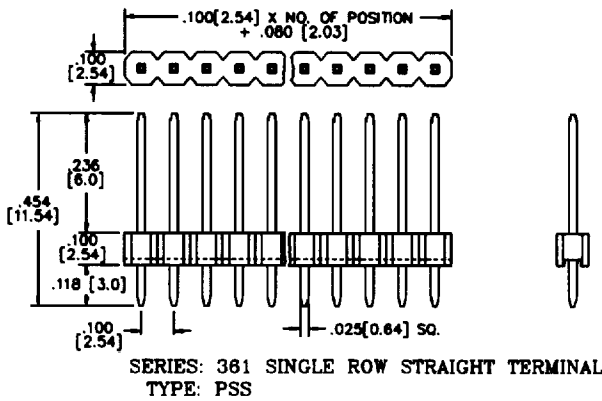

ORDERING INFORMATION

361 - PSS - 040 - 1 - G
SERIES TYPE NO. OF TERMINALS PLATING
1 - 40 SINGLE G: GOLD OVER NICKEL
2 - 80 DOUBLE T: TIN OVER NICKEL
STANDARD TERMINATION
LENGTH SHOWN