
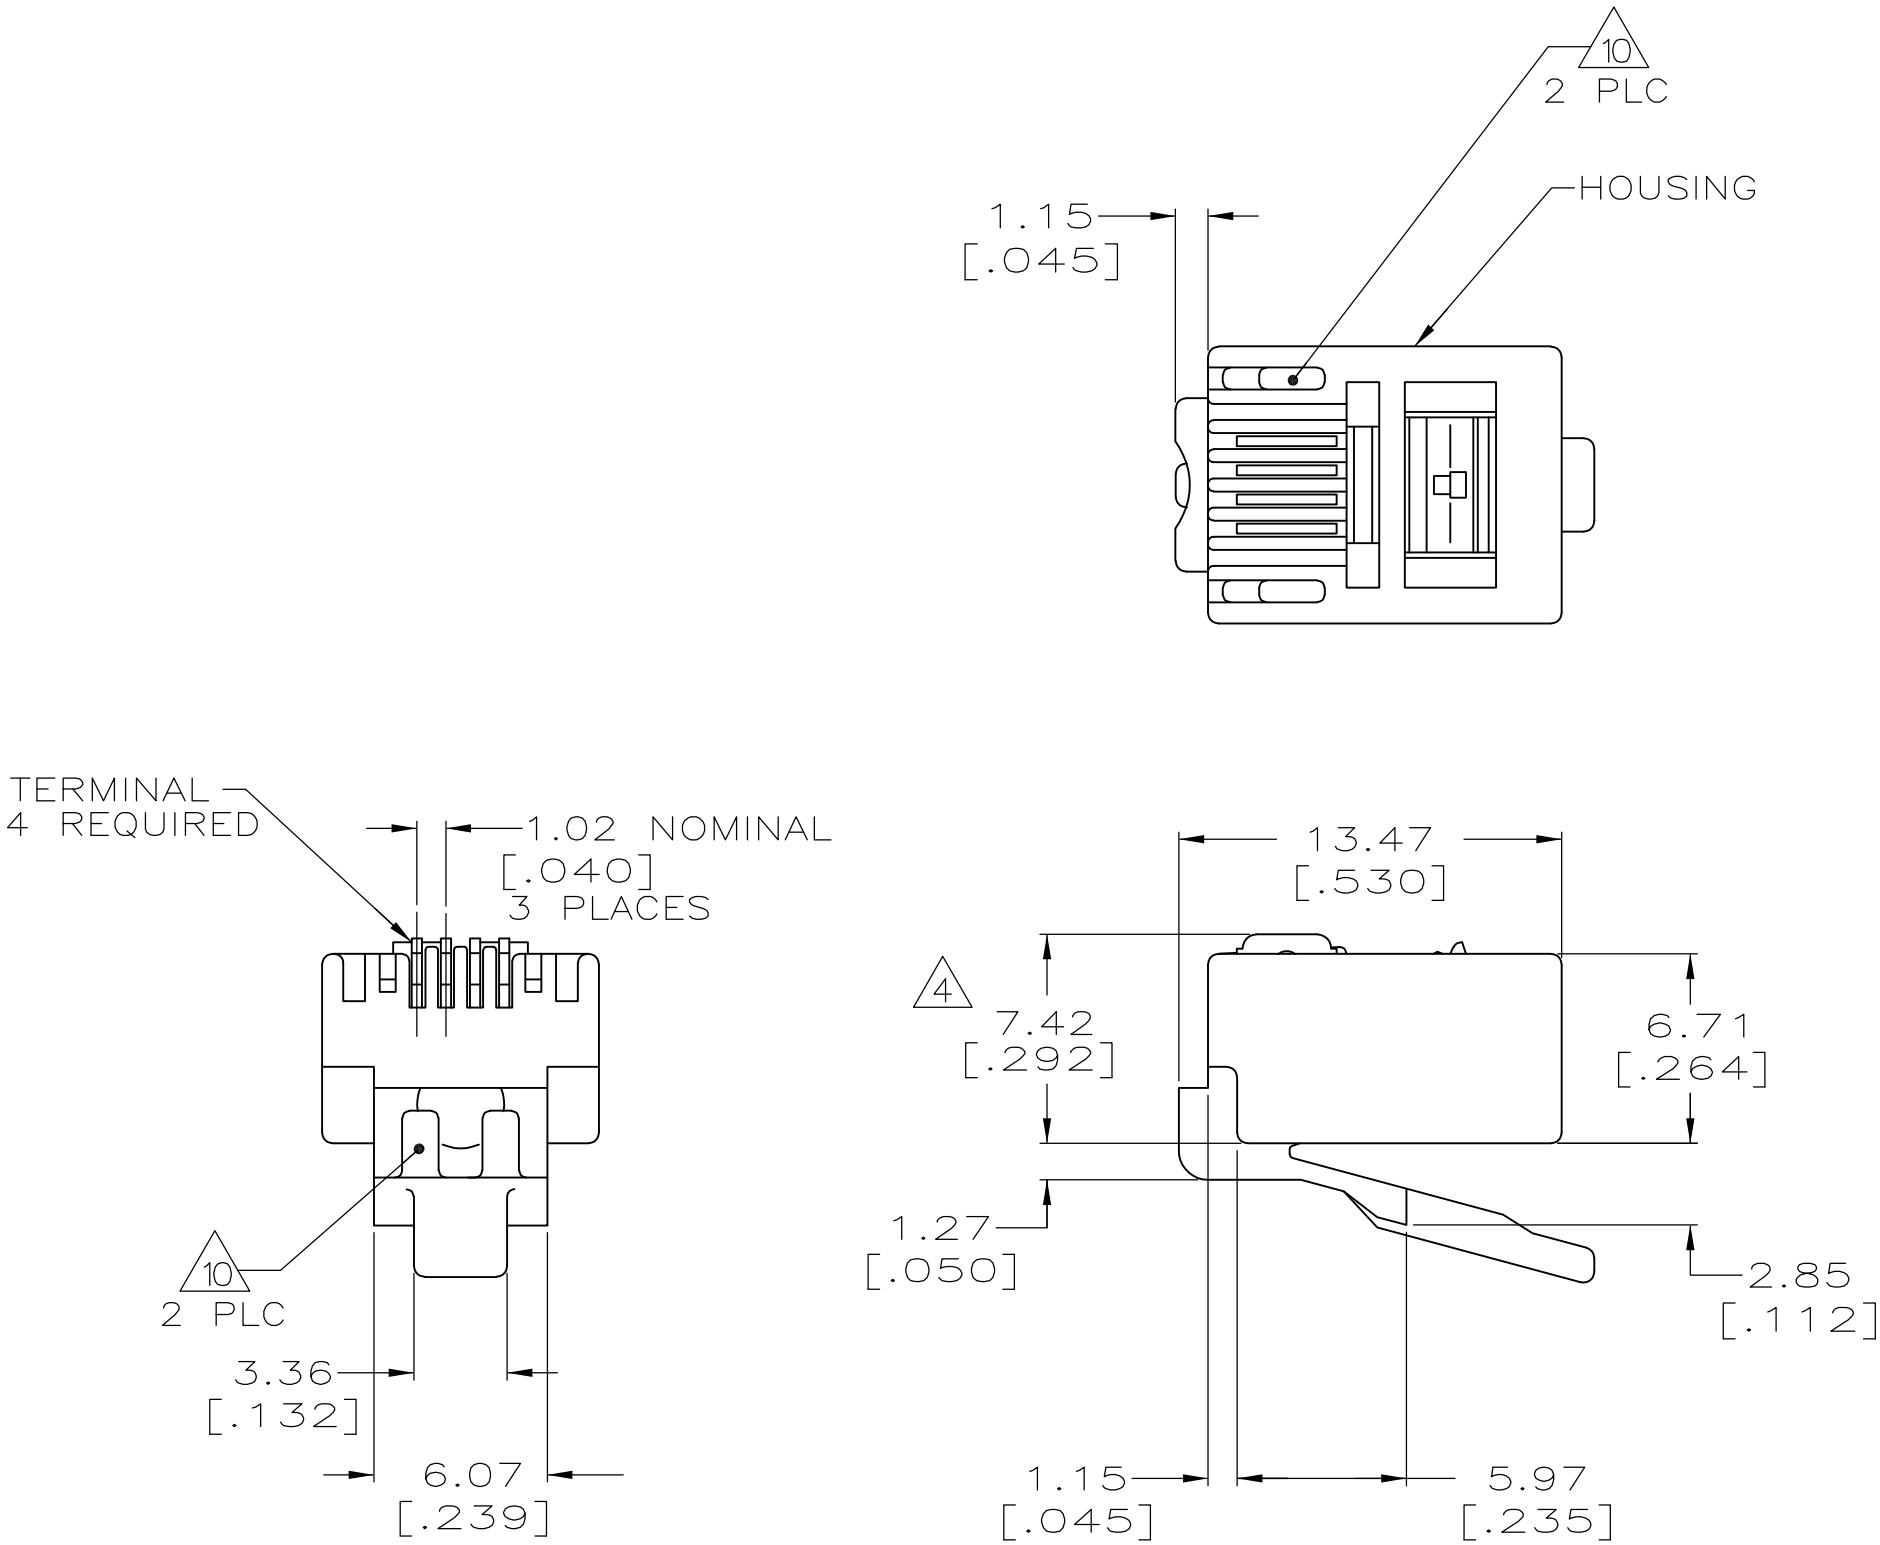


LOC	DIST	REVISIONS				GG	
		P	LTR	DESCRIPTION	DATE	DWN	APVD
HM	00		U	REVISED PER EC 0511-0093-04	12MAY04	SW	BK
			V	OBS -1; REV ECO-07-027076	30DEC07	LH	BM
			W	REV ECO-08-007212	31MAR08	LH	BM

- 1
- DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- 2
- MATERIAL: HOUSING-POLYCARBONATE,CLEAR.
TERMINAL-0.36[.014] THICK PHOSPHOR BRONZE PLATED WITH 1.27μm[.000050] THICK GOLD IN LOCALIZED GOLD PLATE AREA, GOLD FLASH OVER THE REMAINDER, OVER 2.54μm[.000100] THICK NICKEL UNDERPLATE.
3.
- PLUG WILL ACCEPT 26 OR 28 AWG STRANDED WIRE HAVING A MAXIMUM INSULATION DIAMETER OF 0.99[.039] AND A MAXIMUM DIAMETER ROUND CABLE JACKET OF 2.54 [.100] OR OVAL CABLE JACKET OF 2.29 × 4.83[.090 × .190] MAXIMUM.
- 4
- TERMINATED DIMENSION 6.15[.242] MAXIMUM.
- 5
- 10 ASSEMBLIES PER PACKAGE.
- 6
- 10,000 ASSEMBLES PER PACKAGE.
- 7
- 1000 ASSEMBLIES PER PACKAGE.
- 8
- 100 ASSEMBLIES PER PACKAGE.
- 9
- 25 ASSEMBLIES PER PACKAGE.
- 10
- REELED PRODUCT ON STRIP DOES NOT HAVE VOID CORING ILLUSTRATED ON THIS DRAWING.



SUPERSEDED BY 5-641335-7	5	6-641335-3
	9	5-641335-7
	8	5-641335-3
	7	5-641335-2
	6	5-641335-1
OBSOLETE	REELED 10	641335-1
	PACKAGED	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN YTP/UTA 9-1-93		 Tyco Electronics Corporation Harrisburg, PA 17105-3608						
			CHK C.WHITT 9-15-93								
DIMENSIONS: mm [INCHES]		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		APVD J.TONEY 9-20-93		NAME MODULAR PLUG ASSEMBLY, 4 POSITION, LINE -					
		0 PLC ± - 		PRODUCT SPEC 108-1163							
		1 PLC ± -		APPLICATION SPEC							
		2 PLC ± -		114-6016							
3 PLC ± -		WEIGHT -		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO	
4 PLC ± -		FINISH - 		A2		00779		C-641335		-	
MATERIAL - 				CUSTOMER DRAWING		SCALE 4:1		SHEET 1 of 1		REV W	