



Current Mode PWM Controller

FEATURES

- Optimized for Off-line and DC to DC Converters
- Low Start Up Current (<0.5mA)
- Trimmed Oscillator Discharge Current
- Automatic Feed Forward Compensation
- Pulse-by-Pulse Current Limiting
- Enhanced Load Response Characteristics
- Under-Voltage Lockout With Hysteresis
- Double Pulse Suppression
- High Current Totem Pole Output
- Internally Trimmed Bandgap Reference
- 500kHz Operation
- Low Ro Error Amp


DESCRIPTION

The UC1842A/3A/4A/5A family of control ICs is a pin for pin compatible improved version of the UC3842/3/4/5 family. Providing the necessary features to control current mode switched mode power supplies, this family has the following improved features. Start up current is guaranteed to be less than 0.5mA. Oscillator discharge is trimmed to 8.3mA. During under voltage lockout, the output stage can sink at least 10mA at less than 1.2V for Vcc over 5V.

The difference between members of this family are shown in the table below.

Part #	UVLO On	UVLO Off	Maximum Duty Cycle
UC1842A	16.0V	10.0V	<100%
UC1843A	8.5V	7.9V	<100%
UC1844A	16.0V	10.0V	<50%
UC1845A	8.5V	7.9V	<50%

BLOCK DIAGRAM

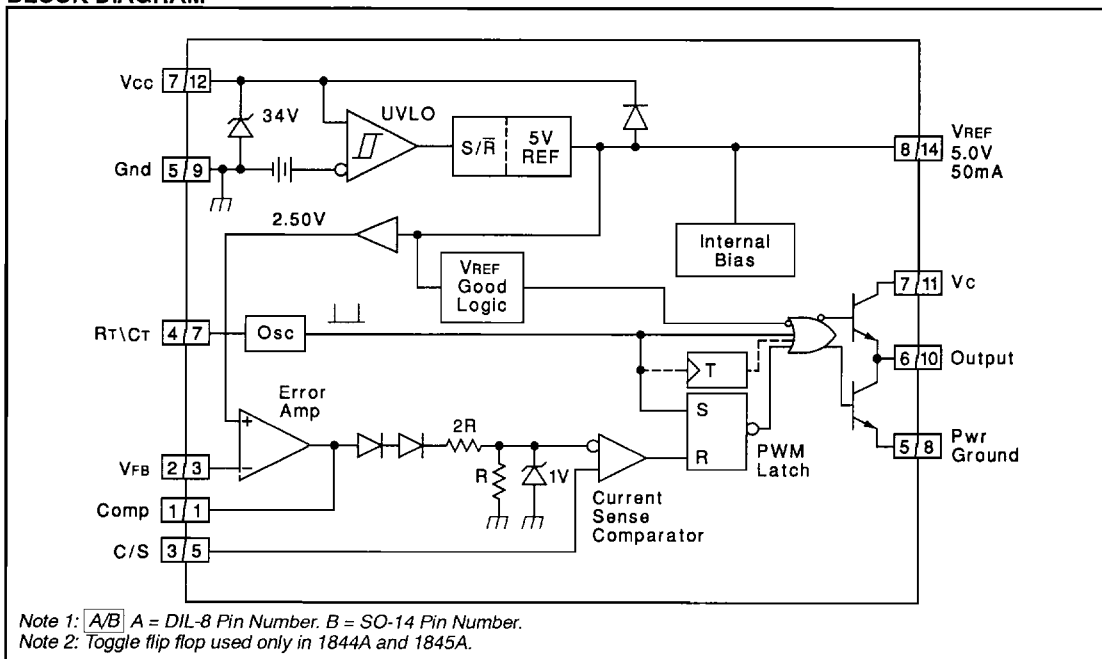


ABSOLUTE MAXIMUM RATINGS (Note 1)

Supply Voltage (Low Impedance Source)	30V
Supply Voltage (I_{CC} mA)	Self Limiting
Output Current	$\pm 1A$
Output Energy (Capacitive Load)	5 μ J
Analog Inputs (Pins 2, 3)	-0.3V to +6.3V
Error Amp Output Sink Current	10mA
Power Dissipation at $T_A \leq 25^\circ C$ (DIL-8)	1W
Storage Temperature Range	-65°C to +150°C
Lead Temperature (Soldering, 10 Seconds)	300°C


Note 1. All voltages are with respect to Ground, Pin 5. Currents are positive into, negative out of the specified terminal. Consult Packaging Section of Databook for thermal limitations and considerations of packages. Pin numbers refer to DIL package only.

SOIC-14 (TOP VIEW) D Package




CONNECTION DIAGRAMS

DIL-8, SOIC-8 (TOP VIEW) J or N, D8 Package



PLCC-20, LCC-20 (TOP VIEW) Q, L Packages



PACKAGE PIN FUNCTION

FUNCTION	PIN
N/C	1
Comp	2
N/C	3-4
VFB	5
N/C	6
ISENSE	7
N/C	8-9
RT/CT	10
N/C	11
Pwr Gnd	12
Gnd	13
N/C	14
Output	15
N/C	16
Vc	17
Vcc	18
N/C	19
VREF	20

ELECTRICAL CHARACTERISTICS Unless otherwise stated, these specifications apply for $-55^\circ C \leq T_A \leq 125^\circ C$ for the UC184xA; $-40^\circ C \leq T_A \leq 85^\circ C$ for the UC284xA; $0 \leq T_A \leq 70^\circ C$ for the UC384xA; $V_{CC} = 15V$ (Note 5); $R_T = 10k$; $C_T = 3.3nF$; $T_A = T_J$; Pin numbers refer to DIL-8.

PARAMETER	TEST CONDITIONS	UC184xA/UC284xA			UC384xA			UNITS
		MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	
Reference Section								
Output Voltage	T _J = 25°C, I _o = 1mA	4.95	5.00	5.05	4.90	5.00	5.10	V
Line Regulation	12 ≤ V _{IN} ≤ 25V		6	20		6	20	mV
Load Regulation	1 ≤ I _o ≤ 20mA		6	25		6	25	mV
Temp. Stability	(Note 2, Note 7)		0.2	0.4		0.2	0.4	mV/°C
Total Output Variation	Line, Load, Temp.	4.9		5.1	4.82		5.18	V
Output Noise Voltage	10Hz ≤ f ≤ 10kHz T _J = 25°C (Note 2)		50			50		μV
Long Term Stability	T _A = 125°C, 1000Hrs. (Note 2)		5	25		5	25	mV
Output Short Circuit		-30	-100	-180	-30	-100	-180	mA
Oscillator Section								
Initial Accuracy	T _J = 25°C (Note 6)	47	52	57	47	52	57	kHz
Voltage Stability	12 ≤ V _{CC} ≤ 25V		0.2	1		0.2	1	%
Temp. Stability	T _{MIN} ≤ T _A ≤ T _{MAX} (Note 2)		5			5		%
Amplitude	V _{PIN 4} peak to peak (Note 2)		1.7			1.7		V
Discharge Current	T _J = 25°C, V _{PIN 4} = 2V (Note 8)	7.8	8.3	8.8	7.8	8.3	8.8	mA
	V _{PIN 4} = 2V (Note 8)	7.5		8.8	7.6		8.8	mA

UC1842A/3A/4A/5A
UC2842A/3A/4A/5A
UC3842A/3A/4A/5A

ELECTRICAL CHARACTERISTICS (cont.) Unless otherwise stated, these specifications apply for -55°C ≤ TA ≤ 125°C for the UC184xA; -40°C ≤ TA ≤ 85°C for the UC284xA; 0 ≤ TA ≤ 70°C for the UC384xA; Vcc = 15V (Note 5); RT = 10k; CT = 3.3nF; TA = TJ; Pin numbers refer to DIL-8.

PARAMETER	TEST CONDITIONS	UC184xA/UC284xA			UC384xA			UNITS
		MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	
Error Amp Section								
Input Voltage	V _{PIN 1} = 2.5V	2.45	2.50	2.55	2.42	2.50	2.58	V
Input Bias Current			-0.3	-1		-0.3	-2	μA
Av _{OL}	2 ≤ V _O ≤ 4V	65	90		65	90		dB
Unity Gain Bandwidth	T _J = 25°C (Note 2)	0.7	1		0.7	1		MHz
PSRR	12 ≤ V _{CC} ≤ 25V	60	70		60	70		dB
Output Sink Current	V _{PIN 2} = 2.7V, V _{PIN 1} = 1.1V	2	6		2	6		mA
Output Source Current	V _{PIN 2} = 2.3V, V _{PIN 1} = 5V	-0.5	-0.8		-0.5	-0.8		mA
V _{OUT} High	V _{PIN 2} = 2.3V, R _L = 15k to ground	5	6		5	6		V
V _{OUT} Low	V _{PIN 2} = 2.7V, R _L = 15k to Pin 8		0.7	1.1		0.7	1.1	V
Current Sense Section								
Gain	(Note 3, Note 4)	2.85	3	3.15	2.85	3	3.15	V/V
Maximum Input Signal	V _{PIN 1} = 5V (Note 3)	0.9	1	1.1	0.9	1	1.1	V
PSRR	12 ≤ V _{CC} ≤ 25V (Note 3)		70			70		dB
Input Bias Current			-2	-10		-2	-10	μA
Delay to Output	V _{PIN 3} = 0 to 2V (Note 2)		150	300		150	300	ns
Output Section								
Output Low Level	I _{SINK} = 20mA		0.1	0.4		0.1	0.4	V
	I _{SINK} = 200mA		15	2.2		15	2.2	V
Output High Level	I _{SOURCE} = 20mA	13	13.5		13	13.5		V
	I _{SOURCE} = 200mA	12	13.5		12	13.5		V
Rise Time	T _J = 25°C, C _L = 1nF (Note 2)		50	150		50	150	ns
Fall Time	T _J = 25°C, C _L = 1nF (Note 2)		50	150		50	150	ns
UVLO Saturation	V _{CC} = 5V, I _{SINK} = 10mA		0.7	1.2		0.7	1.2	V
Under-Voltage Lockout Section								
Start Threshold	x842A/4A	15	16	17	14.5	16	17.5	V
	x843A/5A	7.8	8.4	9.0	7.8	8.4	9.0	V
Min. Operation Voltage After TurnOn	x842A/4A	9	10	11	8.5	10	11.5	V
	x843A/5A	7.0	7.6	8.2	7.0	7.6	8.2	V
PWM Section								
Maximum Duty Cycle	x842A/3A	94	96	100	94	96	100	%
	x844A/5A	47	48	50	47	48	50	%
Minimum Duty Cycle				0			0	%
Total Standby Current								
Start-Up Current			0.3	0.5		0.3	0.5	mA
Operating Supply Current	V _{PIN 2} = V _{PIN 3} = 0V		11	17		11	17	mA
V _{CC} Zener Voltage	I _{CC} = 25mA	30	34		30	34		V

Note 2: These parameters, although guaranteed, are not 100% tested in production.

Note 3: Parameter measured at trip point of latch with V_{PIN 2} = 0.

Note 4: Gain defined as: $A = \frac{\Delta V_{PIN 1}}{\Delta V_{PIN 3}}$; 0 ≤ V_{PIN 3} ≤ 0.8V.

Note 5: Adjust V_{CC} above the start threshold before setting at 15V.

Note 6: Output frequency equals oscillator frequency for the UC1842A and UC1843A. Output frequency is one half oscillator frequency for the UC1844A and UC1845A.


Note 7: "Temperature stability, sometimes referred to as average temperature coefficient, is described by the equation:

$$\text{Temp Stability} = \frac{V_{REF}(\text{max}) - V_{REF}(\text{min})}{T_J(\text{max}) - T_J(\text{min})}$$


V_{REF} (max) and V_{REF} (min) are the maximum & minimum reference voltage measured over the appropriate temperature range. Note that the extremes in voltage do not necessarily occur at the extremes in temperature."

Note 8: This parameter is measured with R_T = 10kΩ to V_{REF}. This contributes approximately 300μA of current to the measurement. The total current flowing into the R_T/C_T pin will be approximately 300μA higher than the measured value.


Error Amp Configuration

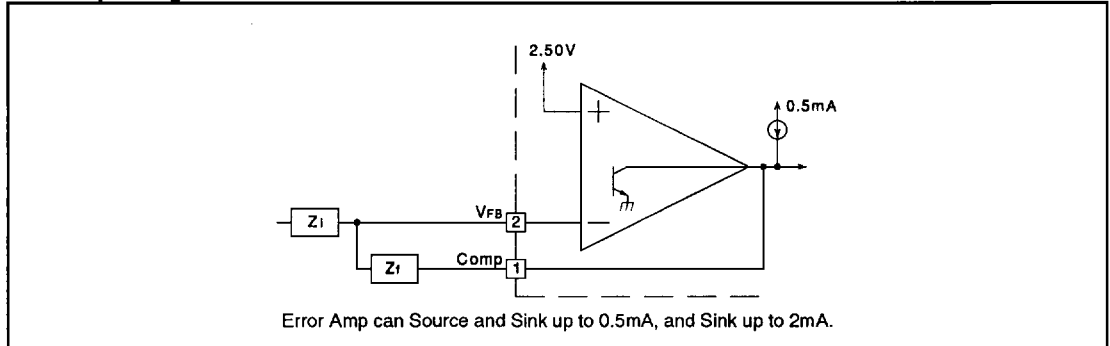

Under-Voltage Lockout

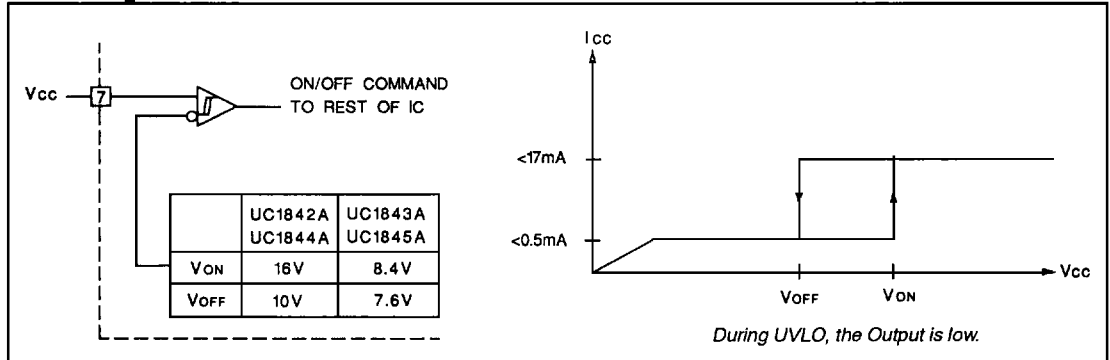


Current Sense Circuit

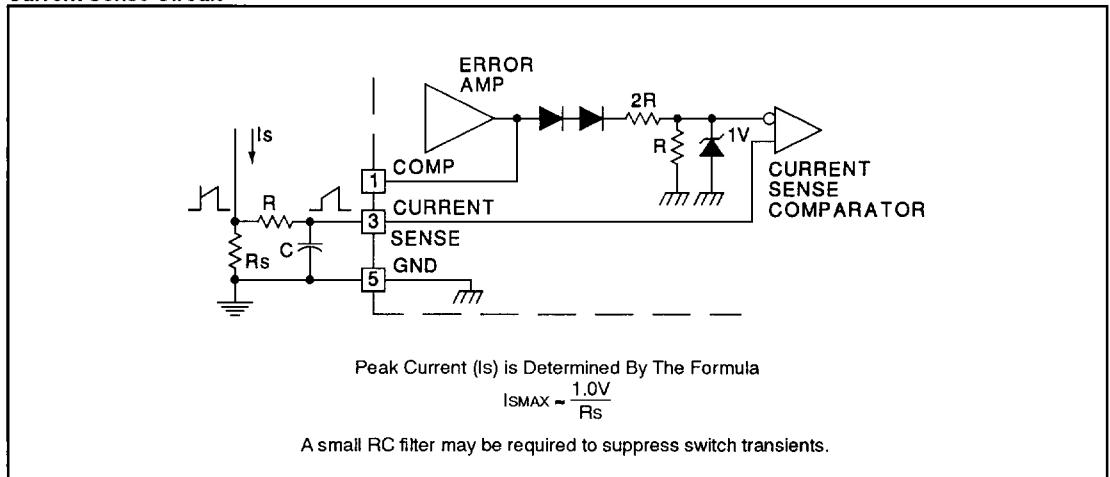


APPLICATIONS DATA (cont.)

Output Saturation Characteristics

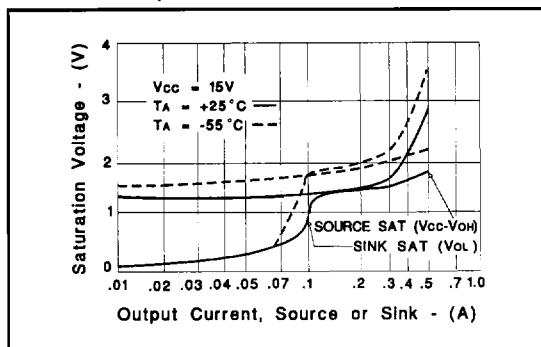


Error Amplifier Open-Loop Frequency Response

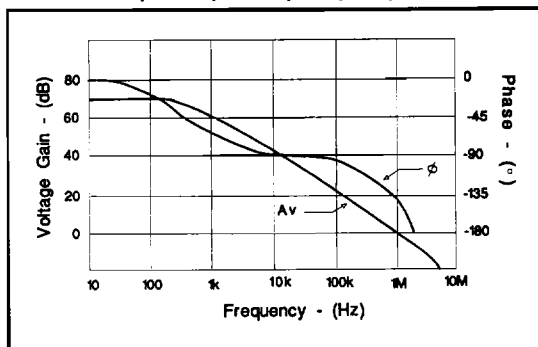


Oscillator Section


Oscillator Frequency vs Timing Resistance



$$\text{For } R_T > 5k \text{ } f \sim \frac{1.72}{R_T C_T}$$

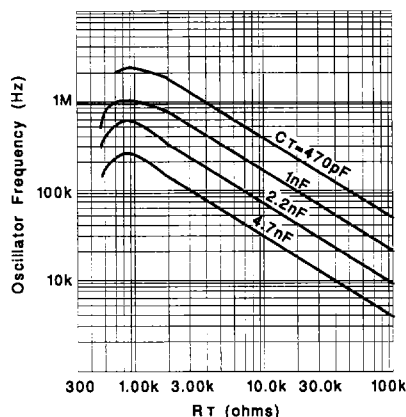

Maximum Duty Cycle vs Timing Resistor

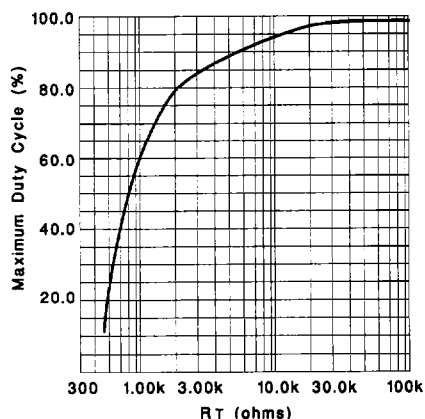

Open-Loop Laboratory Test Fixture

