

PATCH CORDS - JUMPERS

STACKING CROSS PATCH JUMPERS STANDARD BANANA PLUG BOTH ENDS



Available in 10 Colors

795-2219-XX	4 Inches
795-2220-XX	8 Inches
795-2221-XX	12 Inches
795-2231-XX	18 Inches
795-2222-XX	24 Inches
795-2223-XX	36 Inches
795-2224-XX	48 Inches
795-2229-XX	60 Inches
795-2230-XX	72 Inches

Specify Color

1st END — Stacking cross patch standard banana plug. Nickel plated brass body. Nickel plated beryllium copper spring, polypropylene insulation.

WIRE — #18 AWG, stranded copper, PVC insulation.

2nd END — Same as 1st end.

MINIATURE STACKING BANANA PLUG BOTH ENDS



795-2365-XX-25	4 Inches
795-2235-XX-25	6 Inches
795-2366-XX-25	8 Inches
795-2236-XX-25	12 Inches
795-2237-XX-25	18 Inches
795-2238-XX-25	24 Inches
795-2367-XX-25	36 Inches
795-2368-XX-25	48 Inches
795-2369-XX-25	60 Inches

Specify Color

Available in 10 Colors

1st END — Stacking miniature banana plug. Gold plated brass body. Gold plated beryllium copper spring. Polypropylene insulation.

WIRE — #20 AWG, stranded copper wire, PVC insulation.

2nd END — Same as 1st end.

STANDARD STACKING BANANA PLUG TO MINIATURE STACKING BANANA PLUG



Available in (12) Red and
(10) Black

795-2370-XX-25	12 Inches
795-2371-XX-25	18 Inches
795-2372-XX-25	24 Inches
795-2373-XX-25	36 Inches
795-2374-XX-25	48 Inches
795-2375-XX-25	60 Inches

Specify Color

1st END — Stacking cross patch standard banana plug. Gold plated brass body. Gold plated beryllium copper spring.

WIRE — #20 AWG, stranded copper wire, PVC insulation.

2nd END — Stacking miniature banana plug. Gold plated brass body. Gold plated beryllium copper spring. Polypropylene insulation.

STACKING BANANA PLUG TO TIP PLUG



Available in (12) Red and
(10) Black

795-5055-XX-25	4 Inches
795-5056-XX-25	8 Inches
795-5057-XX-25	12 Inches
795-5058-XX-25	18 Inches
795-5059-XX-25	24 Inches
795-5060-XX-25	36 Inches
795-5061-XX-25	48 Inches
795-5062-XX-25	60 Inches

Specify Color

1st END — Stacking cross patch standard banana plug. Plated brass body. Plated beryllium copper spring. Polypropylene insulation.

WIRE — #20 AWG, Stranded copper wire, PVC insulation.

2nd END — Stacking pin tip. Plug gold plated brass body. Gold plated beryllium copper socket. Polypropylene insulation.

INSULATED ALLIGATOR CLIP TO STACKING BANANA PLUG



Available in (12) Red and
(10) Black

795-2290-XX-25	4 Inches
795-2291-XX-25	8 Inches
795-2075-XX-25	12 Inches
795-2076-XX-25	24 Inches
795-2077-XX-25	36 Inches
795-2078-XX-25	48 Inches
795-2079-XX-25	60 Inches

Specify Color

1st END — Plated steel alligator clip with vinyl boot.

WIRE — #18 AWG, stranded copper, PVC insulation.

2nd END — Stacking cross patch banana plug. Nickel plated brass body. Nickel plated beryllium copper spring. Polypropylene insulation.

INSULATED MINIATURE ALLIGATOR CLIP TO STACKING BANANA PLUG



Available in (12) Red and
(10) Black

795-2310-XX-25	4 Inches
795-2311-XX-25	8 Inches
795-2312-XX-25	12 Inches
795-2313-XX-25	24 Inches
795-2314-XX-25	36 Inches
795-2315-XX-25	48 Inches
795-2316-XX-25	60 Inches


Specify Color

1st END — Plated steel miniature alligator clip, vinyl boot.

WIRE — #20 AWG, stranded copper wire, PVC insulation.

2nd END — Stacking cross patch banana plug. Nickel plated brass body. Nickel plated beryllium copper spring. Polypropylene insulation.

INSULATED MINI CLIP TO MINIATURE STACKING BANANA PLUG



Available in (12) Red and
(10) Black

795-2380-XX-25	12 Inches
795-2381-XX-25	24 Inches
795-2382-XX-25	36 Inches
795-2383-XX-25	48 Inches
795-2384-XX-25	60 Inches

Specify Color

1st END — Plated steel miniature alligator clip with vinyl boot.

WIRE — #20 AWG, stranded copper wire, PVC insulation.

2nd END — Stacking miniature banana plug. Gold plated brass body. Gold plated beryllium copper spring. Polypropylene insulation.

INSULATED SPADE LUG TO STACKING BANANA PLUG



Available in (12) Red and
(10) Black

795-2340-XX-25	12 Inches
795-2341-XX-25	24 Inches
795-2342-XX-25	36 Inches
795-2343-XX-25	48 Inches
795-2344-XX-25	60 Inches

Specify Color

1st END — Bright tin plated brass spade lug with butyrate insulating handle.

WIRE — #18 AWG, stranded copper wire, PVC insulation.

2nd END — Stacking cross patch standard banana plug. Nickel plated brass body. Nickel plated beryllium copper spring. Polypropylene insulation.


SPECIFY -
CONCORD
THE COMPONENT PEOPLE

COLOR CODE FOR ORDERING									
BLK	BRN	RED	ORN	YEL	GRN	BLU	PUR	GRY	WHT
10	11	12	13	14	15	16	17	18	19

30 GREAT JONES STREET
NEW YORK, N.Y. 10012-1115
(212) 777-6571 • FAX (212) 995-0161

PATCH CORDS - JUMPERS

STANDARD BANANA PLUG BOTH ENDS

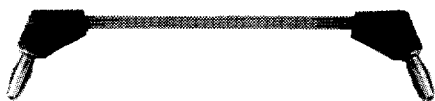

Available in (12) Red and
(10) Black

795-2060-XX	8 Inches
795-2061-XX	12 Inches
795-2062-XX	24 Inches
795-2063-XX	36 Inches


Specify Color ☐

1st END — 40° angled standard banana plug. Nickel plated brass body. Nickel plated beryllium copper spring. Polypropylene insulation.

WIRE — #18 AWG, stranded copper wire, PVC insulation.

2nd END — Same as 1st end.

STANDARD BANANA PLUG TO MINIATURE BANANA PLUG



Available in (12) Red and
(10) Black

795-2070-XX	8 Inches
795-2071-XX	12 Inches
795-2072-XX	24 Inches
795-2073-XX	36 Inches


Specify Color ☐

1st END — 40° angled standard banana plug. Nickel plated brass body. Nickel plated beryllium copper spring. Polypropylene insulation.

WIRE — #20 AWG, stranded copper wire, PVC insulation.

2nd END — 40° angled miniature banana plug. Nickel plated brass body. Nickel plated beryllium copper spring. Polypropylene insulation.

MINIATURE BANANA PLUGS BOTH ENDS



Available in (12) Red and
(10) Black

795-2065-XX	8 Inches
795-2066-XX	12 Inches
795-2067-XX	24 Inches
795-2068-XX	36 Inches


Specify Color ☐

1st END — 40° angled miniature banana plug. Nickel plated brass body. Nickel plated beryllium copper spring. Polypropylene insulation.

WIRE — #20 AWG, stranded copper wire, PVC insulation.

2nd END — Same as 1st end.

40° STANDARD BANANA PLUG TO STANDARD CROSS PATCH BANANA PLUG

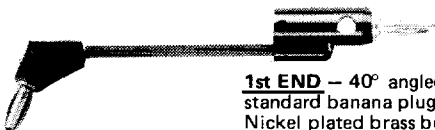

Available in (12) Red and
(10) Black

795-2080-XX	8 Inches
795-2081-XX	12 Inches
795-2082-XX	24 Inches
795-2083-XX	36 Inches

Specify Color ☐

1st END — 40° angled standard banana plug. Nickel plated brass body. Nickel plated beryllium copper spring. Polypropylene insulation.

WIRE — #18 AWG, stranded copper wire, PVC insulation.

2nd END — Cross patch/stacking standard banana plug. Nickel plated brass body. Nickel plated beryllium copper spring.

40° STANDARD BANANA PLUG TO CROSS PATCH PHONE TIP



Available in (12) Red and
(10) Black

795-2090-XX	8 Inches
795-2091-XX	12 Inches
795-2092-XX	24 Inches
795-2093-XX	36 Inches

Specify Color ☐

1st END — 40° angled standard banana plug. Nickel plated brass body. Nickel plated beryllium copper spring. Polypropylene insulation.

WIRE — #18 AWG, stranded copper wire, PVC insulation.

2nd END — Cross patch phone tip. Nickel plated brass tip. Polypropylene insulation.

INSULATED ALLIGATOR CLIP TO BANANA PLUG



Available in (12) Red and (10) Black

795-2300-XX-25	4 Inches
795-2301-XX-25	8 Inches
795-2302-XX-25	12 Inches
795-2303-XX-25	24 Inches
795-2304-XX-25	36 Inches
795-2305-XX-25	48 Inches
795-2306-XX-25	60 Inches

Specify Color ☐

1st END — Plated steel alligator clip with vinyl boot.

WIRE — #18 AWG, stranded copper wire, PVC insulation.

2nd END — Banana plug. Nickel plated brass body. Nickel plated beryllium copper spring. Butyrate insulation.

INSULATED SPADE LUG TO BANANA PLUG



Available in (12) Red and
(10) Black

795-2330-XX-25	12 Inches
795-2331-XX-25	24 Inches
795-2332-XX-25	36 Inches
795-2333-XX-25	48 Inches
795-2334-XX-25	60 Inches

Specify Color ☐

1st END — Bright tin plated brass spade lug with butyrate insulating handle.

WIRE — #18 AWG, stranded copper, PVC insulation.

2nd END — Banana plug. Nickel plated brass body. Nickel plated beryllium copper spring. Butyrate insulating handle.

SPADE LUG BOTH ENDS



Available in (12) Red and (10) Black

795-2100-XX	12 Inches
795-2101-XX	24 Inches
795-2102-XX	36 Inches
795-2103-XX	48 Inches
795-2104-XX	60 Inches

Specify Color ☐

1st END — Bright tin plated brass spade lug with butyrate handle.

WIRE — #18 AWG, stranded copper wire, PVC insulation.

2nd END — Same as 1st end.

PATCH CORDS - JUMPERS

RETRACTABLE SHEATHED JUMPERS, STANDARD BANANA PLUG BOTH ENDS



Available in (12) Red and (10) Black

795-3070-XX-25	4 Inches	1st END — Nylon sheathed banana plug, Nickel plated brass body, nickel plated beryllium copper spring.
795-3071-XX-25	8 Inches	
795-3072-XX-25	12 Inches	
795-3073-XX-25	18 Inches	
795-3074-XX-25	24 Inches	
795-3075-XX-25	36 Inches	WIRE — #18 AWG, stranded copper wire, PVC insulation.
795-3076-XX-25	48 Inches	
795-3077-XX-25	60 Inches	

Specify Color

2nd END — Same as 1st end.

RETRACTABLE SHEATHED BANANA PLUG TO IN-LINE BANANA JACK



RATED FOR 1200 VOLTS/7 AMPS MAX.

Available in (12) Red and (10) Black

795-3078-XX-25	12 Inches	1st END — Nylon sheathed banana plug, Nickel plated brass body, nickel plated beryllium copper spring.
795-3079-XX-25	24 Inches	
795-3080-XX-25	36 Inches	
795-3081-XX-25	48 Inches	
795-3082-XX-25	60 Inches	
		WIRE — #18 AWG, stranded copper wire, PVC insulation.

Specify Color

2nd END — In line banana jack, nickel plated brass.

RETRACTABLE SHEATHED BANANA PLUG TO SAFETY HOOK



RATED FOR 1200 VOLTS MAX./7 AMPS

Available in (12) Red and (10) Black

795-3083-XX-25	12 Inches	1st END — Nylon sheathed banana plug, nickel plated brass body, nickel plated beryllium copper spring.
795-3084-XX-25	24 Inches	
795-3085-XX-25	36 Inches	
795-3086-XX-25	48 Inches	
795-3087-XX-25	60 Inches	
		WIRE — #18 AWG, stranded copper wire, PVC insulation.

Specify Color

2nd END — Safety hook, gold plated beryllium copper contact. Lexan insulation.

BANANA JACK TO STANDARD INSULATED ALLIGATOR CLIP



Available in (12) Red and (10) Black

795-2320-XX-25	12 Inches	1st END — In line banana jack. Nickel plated brass body. Butyrate insulation.
795-2321-XX-25	24 Inches	
795-2322-XX-25	36 Inches	
795-2323-XX-25	48 Inches	
795-2324-XX-25	60 Inches	
		WIRE — #18 AWG, stranded copper wire, PVC insulation.

Specify Color

2nd END — Plated steel alligator clip with vinyl boot.

STANDARD INSULATED ALLIGATOR CLIPS BOTH ENDS



Available in (12) Red and (10) Black

795-2270-XX-25	4 Inches	1st END — Plated steel alligator clip with vinyl boot.
795-2271-XX-25	8 Inches	
795-2035-XX-25	12 Inches	
795-2036-XX-25	24 Inches	
795-2037-XX-25	36 Inches	
795-2038-XX-25	48 Inches	WIRE — #18 AWG, stranded copper wire, PVC insulation.
795-2039-XX-25	60 Inches	

Specify Color

2nd END — Same as 1st end.

INSULATED MINIATURE ALLIGATOR CLIP BOTH ENDS



Available in (12) Red and (10) Black

18 AWG	20 AWG		1st END — Plated steel miniature alligator clip with vinyl boot.
795-2275-XX-25	795-2280-XX-25	4 Inches	
795-2276-XX-25	795-2281-XX-25	8 Inches	
795-2040-XX-25	795-2282-XX-25	12 Inches	
795-2041-XX-25		18 Inches	
795-2042-XX-25	795-2283-XX-25	24 Inches	WIRE — #18 AWG stranded copper wire, PVC insulation.
795-2043-XX-25	795-2284-XX-25	36 Inches	
795-2044-XX-25	795-2285-XX-25	48 Inches	
795-2045-XX-25	795-2286-XX-25	60 Inches	

Specify Color

2nd END — Same as 1st end.

INSULATED MICRO ALLIGATOR CLIPS BOTH ENDS



Available in (12) Red and (10) Black

795-2395-XX-25	4 Inches	1st END — Micro alligator clip. Copper with vinyl boot.
795-2396-XX-25	8 Inches	
795-2397-XX-25	12 Inches	
795-2399-XX-25	24 Inches	
795-2400-XX-25	36 Inches	
795-2401-XX-25	48 Inches	WIRE — #20 AWG, stranded copper wire, PVC insulation.

Specify Color

2nd END — Same as 1st end.

STANDARD INSULATED ALLIGATOR CLIP TO CROSS PATCH PHONE TIP



Available in (12) Red and (10) Black

795-2055-XX	12 Inches	1st END — Plated steel alligator clip with vinyl boot.
795-2056-XX	24 Inches	
795-2057-XX	36 Inches	
795-2058-XX	48 Inches	
795-2059-XX	60 Inches	
		WIRE — #18 gauge stranded copper wire, PVC insulation.

Specify Color

2nd END — Stacking cross patch phone tip. Nickel plated brass body.

SPECIFY —
CONCORD
"THE COMPONENT PEOPLE"

30 GREAT JONES STREET
NEW YORK, N.Y. 10012-1115
(212) 777-6571 • FAX (212) 995-0161

PATCH CORD - JUMPERS

STANDARD ALLIGATOR CLIPS TO SPADE LUG



Available in (12) Red and (10) Black

795-2050-XX	12 Inches	1st END — Plated steel alligator clip with vinyl boot.
795-2051-XX	24 Inches	
795-2052-XX	36 Inches	WIRE — #18 AWG, stranded copper wire, PVC insulation.
795-2053-XX	48 Inches	
795-2054-XX	60 Inches	2nd END — Nickel plated brass spade lug with butyrate handle.

Specify Color ☐

STACKING TIP PLUG BOTH ENDS .080 PINS/.080 JACKS



Available in 10 Colors

795-5045-XX-25	4 Inches	1st END — Stacking pin tip plug. Gold plated brass body.
795-5046-XX-25	8 Inches	
795-5047-XX-25	12 Inches	
795-5048-XX-25	18 Inches	
795-5049-XX-25	24 Inches	
795-5050-XX-25	36 Inches	
795-5051-XX-25	48 Inches	
795-5052-XX-25	60 Inches	

Specify Color ☐

2nd END — Same as 1st end.

EXTENSION STACKING BANANA PLUGS BOTH ENDS



Available in 10 Colors

795-2760-XX-25	4 Inches	1st END — Extension stacking banana plug. Nickel plated brass body, nickel plated beryllium copper spring. Polypropylene insulation.
795-2761-XX-25	8 Inches	
795-2762-XX-25	12 Inches	
795-2763-XX-25	18 Inches	
795-2764-XX-25	24 Inches	
795-2765-XX-25	36 Inches	
795-2766-XX-25	48 Inches	
795-2767-XX-25	60 Inches	

Specify Color ☐

2nd END — Same as 1st end.

CROSS PATCH PHONE TIP .080 PINS/.080 JACKS



Available in Black, Red, Yellow, Green, Blue & White

795-2225-XX	8 Inches	1st END — Stacking cross patch phone tip. Nickel plated brass body.
795-2226-XX	12 Inches	
795-2227-XX	24 Inches	WIRE — #18 AWG, stranded copper wire, PVC insulation.
795-2228-XX	36 Inches	

Specify Color ☐

2nd END — Same as 1st end.

LOW PROFILE STACKING TIP PLUG TO TIP PLUG .080 PINS/.080 JACKS




Available in (12) Red and (10) Black

795-2386-XX-25	4 Inches	1st END — Stacking pin tip plug. Gold plated brass body. Gold plated beryllium copper spring. Polypropylene insulation.
795-2388-XX-25	8 Inches	
795-2389-XX-25	12 Inches	
795-2390-XX-25	18 Inches	
795-2391-XX-25	24 Inches	
795-2392-XX-25	36 Inches	
795-2393-XX-25	48 Inches	
795-2394-XX-25	60 Inches	

Specify Color ☐

2nd END — Same as 1st end.

Test Lead Rack

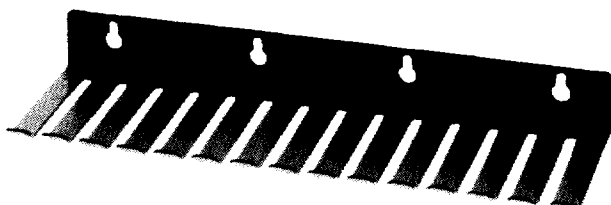

CONCORD NO.
01-5525-14

BLUE ENAMELED FINISHED STEEL
11" LONG, 14 SLOTS

CONCORD[®]
MAINTAINS LARGE
INVENTORIES TO
SHIP SAME DAY ON
MOST PRODUCTS!

MANUFACTURED
BY
CONCORD[®]
"THE COMPONENT PEOPLE"

COLOR CODE FOR ORDERING										
BLK	BRN	RED	ORN	YEL	GRN	BLU	PUR	GRY	WHT	
10	11	12	13	14	15	16	17	18	19	