


IRG4PC30K

Short Circuit Rated
UltraFast IGBT

Features


- High short circuit rating optimized for motor control, $t_{sc} = 10\mu s$, @360V V_{CE} (start), $T_J = 125^\circ C$, $V_{GE} = 15V$
- Combines low conduction losses with high switching speed
- Latest generation design provides tighter parameter distribution and higher efficiency than previous generations



$V_{CES} = 600V$
$V_{CE(on)} \text{ typ.} = 2.21V$
@ $V_{GE} = 15V$, $I_C = 16A$

Benefits

- As a Freewheeling Diode we recommend our HEXFRED™ ultrafast, ultrasoft recovery diodes for minimum EMI / Noise and switching losses in the Diode and IGBT
- Latest generation 4 IGBTs offer highest power density motor controls possible
- This part replaces the IRGPC30K and IRGPC30M devices



Absolute Maximum Ratings

	Parameter	Max.	Units
V_{CES}	Collector-to-Emitter Voltage	600	V
$I_C @ T_C = 25^\circ C$	Continuous Collector Current	28	A
$I_C @ T_C = 100^\circ C$	Continuous Collector Current	16	
I_{CM}	Pulsed Collector Current ①	58	
I_{LM}	Clamped Inductive Load Current ②	58	
t_{sc}	Short Circuit Withstand Time	10	μs
V_{GE}	Gate-to-Emitter Voltage	± 20	V
E_{ARV}	Reverse Voltage Avalanche Energy ③	260	mJ
$P_D @ T_C = 25^\circ C$	Maximum Power Dissipation	100	W
$P_D @ T_C = 100^\circ C$	Maximum Power Dissipation	42	
T_J	Operating Junction and	-55 to +150	$^\circ C$
T_{STG}	Storage Temperature Range		
	Soldering Temperature, for 10 sec.		
	Mounting torque, 6-32 or M3 screw.	300 (0.063 in. (1.6mm) from case) 10 lbf•in (1.1N•m)	

Thermal Resistance

	Parameter	Typ.	Max.	Units
$R_{\theta JC}$	Junction-to-Case	—	1.2	$^\circ C/W$
$R_{\theta CS}$	Case-to-Sink, Flat, Greased Surface	0.24	—	
$R_{\theta JA}$	Junction-to-Ambient, typical socket mount	—	40	
Wt	Weight	6 (0.21)	—	g (oz)

IRG4PC30K

International
IR Rectifier

Electrical Characteristics @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions
$V_{(BR)CES}$	Collector-to-Emitter Breakdown Voltage	600	—	—	V	$V_{GE} = 0V, I_C = 250\mu A$
$V_{(BR)ECS}$	Emitter-to-Collector Breakdown Voltage ④	18	—	—	V	$V_{GE} = 0V, I_C = 1.0A$
$\Delta V_{(BR)CES}/\Delta T_J$	Temperature Coeff. of Breakdown Voltage	—	0.54	—	V/°C	$V_{GE} = 0V, I_C = 1.0mA$
$V_{CE(ON)}$	Collector-to-Emitter Saturation Voltage	—	2.21	—	V	$I_C = 14A$
		—	2.21	2.7		$I_C = 16A$
		—	2.88	—		$I_C = 28A$
		—	2.36	—		$I_C = 16A, T_J = 150^\circ\text{C}$
$V_{GE(th)}$	Gate Threshold Voltage	3.0	—	6.0		$V_{CE} = V_{GE}, I_C = 250\mu A$
$\Delta V_{GE(th)}/\Delta T_J$	Temperature Coeff. of Threshold Voltage	—	-12	—	mV/°C	$V_{CE} = V_{GE}, I_C = 250\mu A$
g_{fe}	Forward Transconductance ⑤	5.4	8.1	—	S	$V_{CE} = 100V, I_C = 16A$
I_{CES}	Zero Gate Voltage Collector Current	—	—	250	μA	$V_{GE} = 0V, V_{CE} = 600V$
		—	—	2.0		$V_{GE} = 0V, V_{CE} = 10V, T_J = 25^\circ\text{C}$
		—	—	1100		$V_{GE} = 0V, V_{CE} = 600V, T_J = 150^\circ\text{C}$
I_{GES}	Gate-to-Emitter Leakage Current	—	—	± 100	nA	$V_{GE} = \pm 20V$

Switching Characteristics @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions
Q_g	Total Gate Charge (turn-on)	—	67	100	nC	$I_C = 16A$
Q_{ge}	Gate - Emitter Charge (turn-on)	—	11	16		$V_{CC} = 400V$
Q_{gc}	Gate - Collector Charge (turn-on)	—	25	37		$V_{GE} = 15V$
$t_{d(on)}$	Turn-On Delay Time	—	26	—	ns	$T_J = 25^\circ\text{C}$
t_r	Rise Time	—	28	—		$I_C = 16A, V_{CC} = 480V$
$t_{d(off)}$	Turn-Off Delay Time	—	130	200		$V_{GE} = 15V, R_G = 23\Omega$
t_f	Fall Time	—	120	170		Energy losses include "tail"
E_{on}	Turn-On Switching Loss	—	0.36	—	mJ	See Fig. 9,10,14
E_{off}	Turn-Off Switching Loss	—	0.51	—		
E_{ts}	Total Switching Loss	—	0.87	1.3		
t_{sc}	Short Circuit Withstand Time	10	—	—	μs	$V_{CC} = 400V, T_J = 125^\circ\text{C}$ $V_{GE} = 15V, R_G = 23\Omega, V_{CPK} < 500V$
$t_{d(on)}$	Turn-On Delay Time	—	25	—	ns	$T_J = 150^\circ\text{C},$
t_r	Rise Time	—	29	—		$I_C = 16A, V_{CC} = 480V$
$t_{d(off)}$	Turn-Off Delay Time	—	190	—		$V_{GE} = 15V, R_G = 23\Omega$
t_f	Fall Time	—	190	—		Energy losses include "tail"
E_{ts}	Total Switching Loss	—	1.2	—	mJ	See Fig. 11,14
E_{on}	Turn-On Switching Loss	—	0.26	—		$T_J = 25^\circ\text{C}, V_{GE} = 15V, R_G = 23\Omega$
E_{off}	Turn-Off Switching Loss	—	0.36	—		$I_C = 14A, V_{CC} = 480V$
E_{ts}	Total Switching Loss	—	0.62	—		Energy losses include "tail"
L_E	Internal Emitter Inductance	—	13	—	nH	Measured 5mm from package
C_{ies}	Input Capacitance	—	920	—		$V_{GE} = 0V$
C_{oes}	Output Capacitance	—	110	—	pF	$V_{CC} = 30V$
C_{res}	Reverse Transfer Capacitance	—	27	—		$f = 1.0MHz$

Details of note ① through ⑤ are on the last page

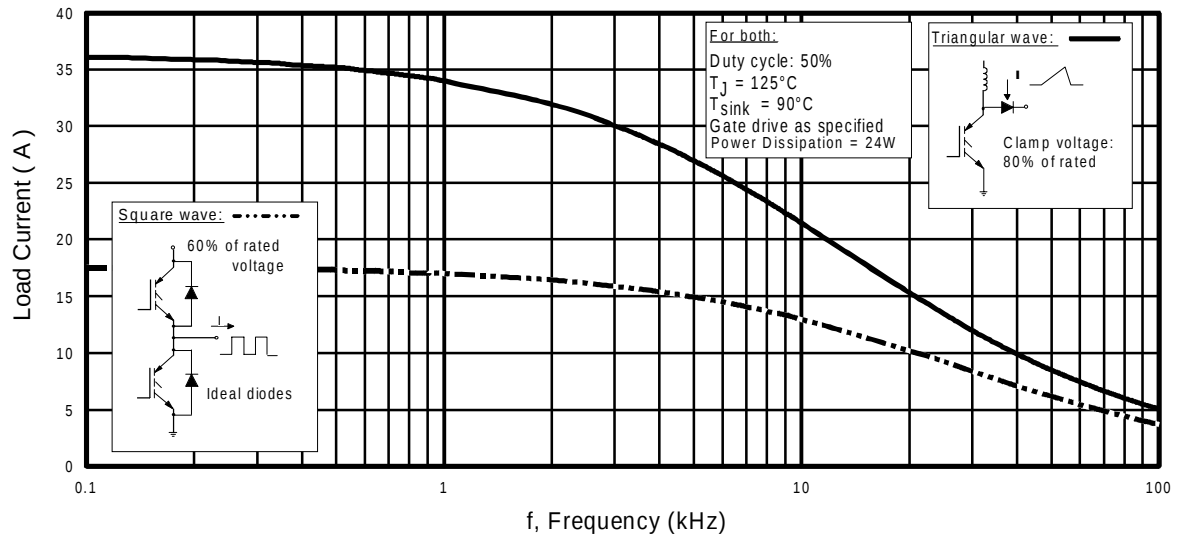


Fig. 1 - Typical Load Current vs. Frequency
(Load Current = I_{RMS} of fundamental)

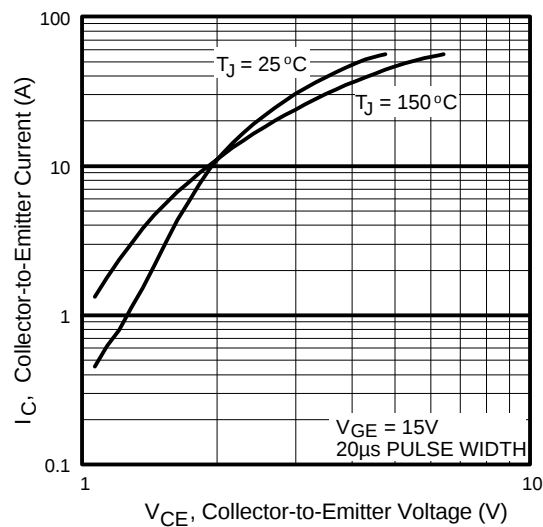


Fig. 2 - Typical Output Characteristics

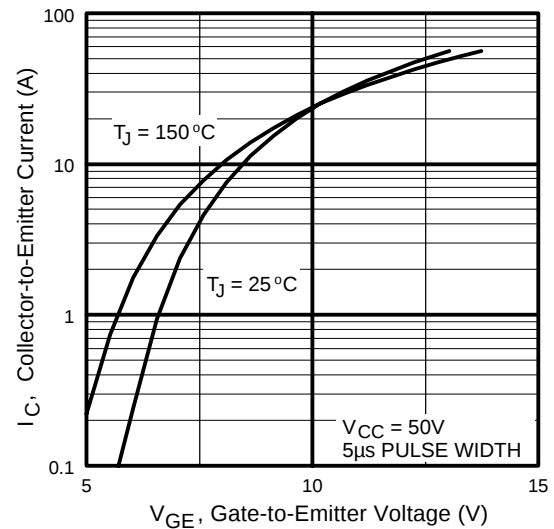


Fig. 3 - Typical Transfer Characteristics

IRG4PC30K

International
IR Rectifier

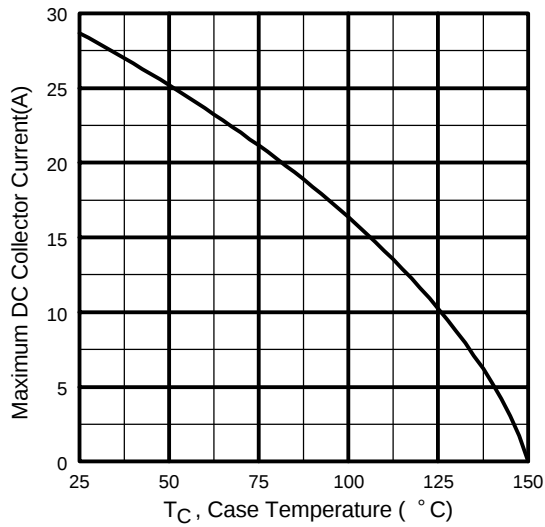


Fig. 4 - Maximum Collector Current vs. Case Temperature

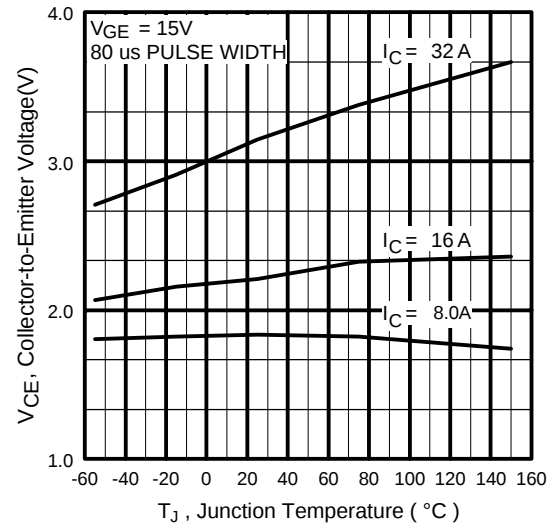


Fig. 5 - Typical Collector-to-Emitter Voltage vs. Junction Temperature

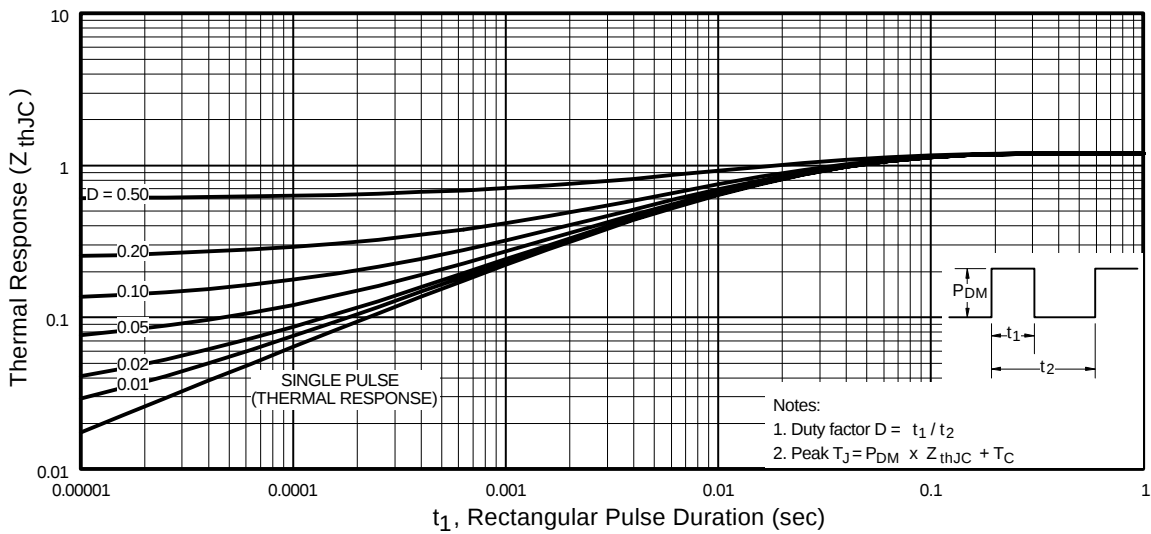


Fig. 6 - Maximum Effective Transient Thermal Impedance, Junction-to-Case

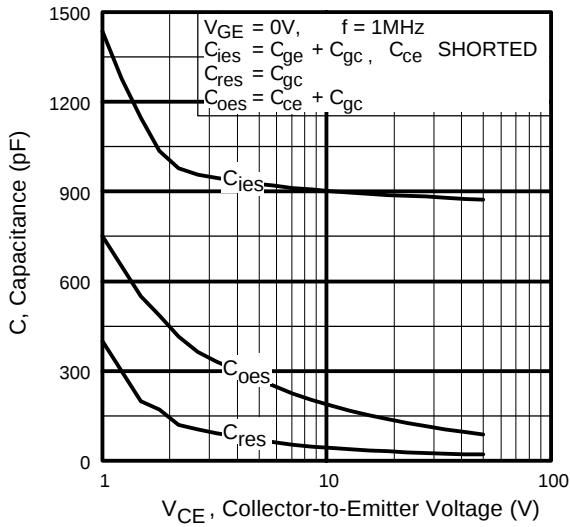


Fig. 7 - Typical Capacitance vs. Collector-to-Emitter Voltage

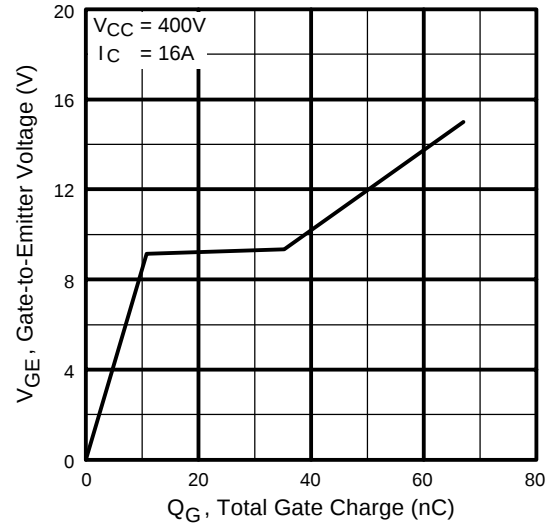


Fig. 8 - Typical Gate Charge vs. Gate-to-Emitter Voltage

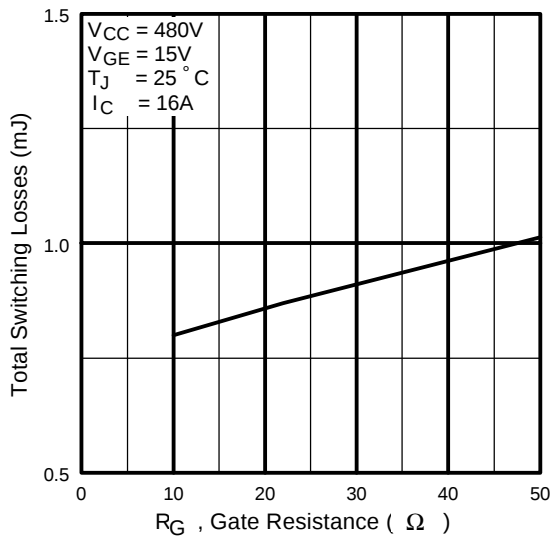


Fig. 9 - Typical Switching Losses vs. Gate Resistance

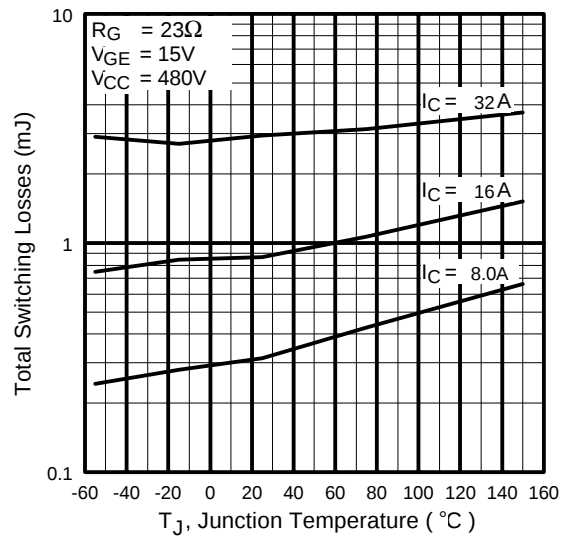


Fig. 10 - Typical Switching Losses vs. Junction Temperature

IRG4PC30K

International
IR Rectifier

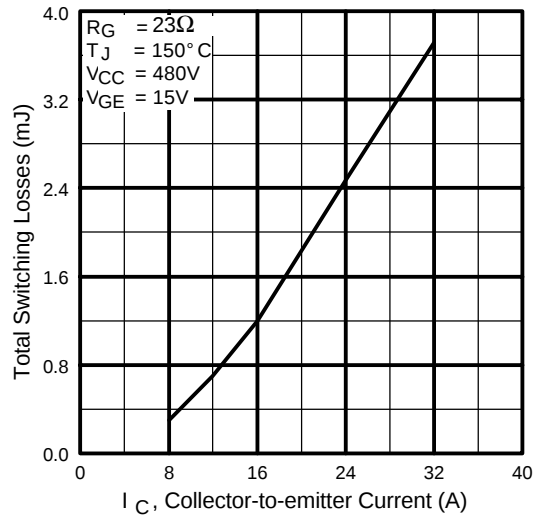


Fig. 11 - Typical Switching Losses vs. Collector-to-Emitter Current

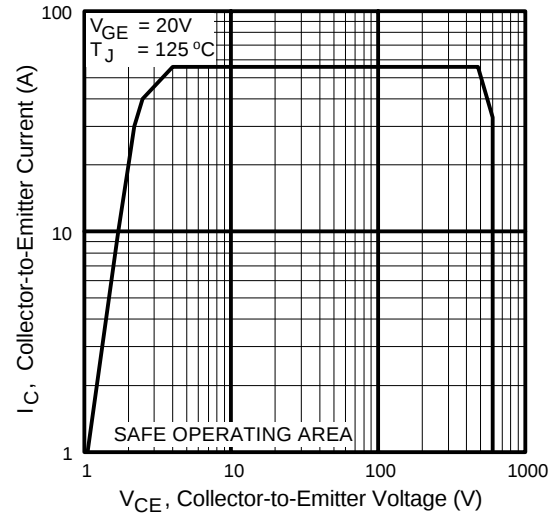


Fig. 12 - Turn-Off SOA

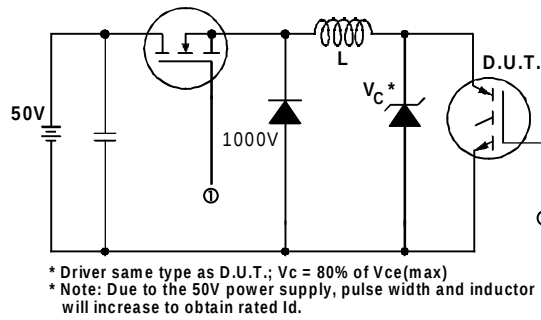


Fig. 13a - Clamped Inductive Load Test Circuit

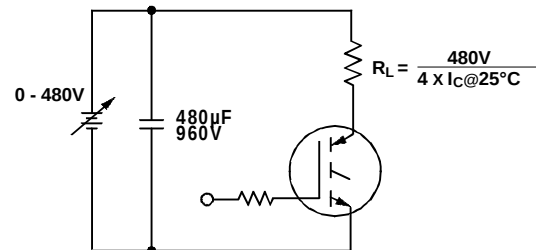


Fig. 13b - Pulsed Collector Current Test Circuit

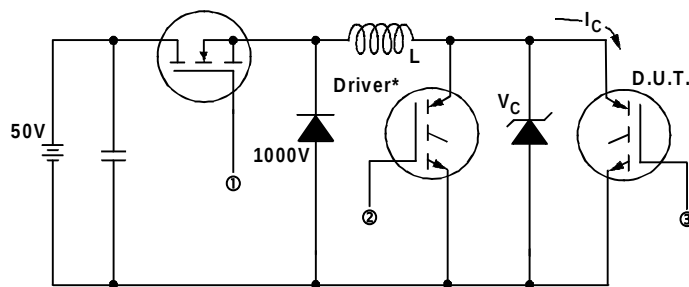


Fig. 14a - Switching Loss Test Circuit

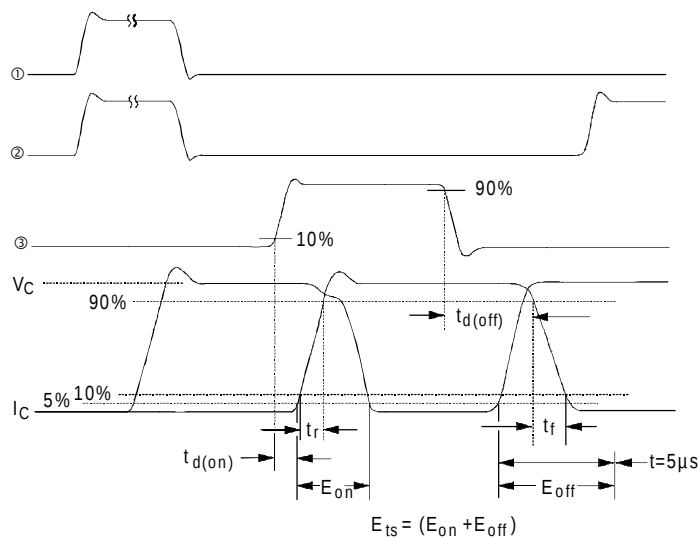


Fig. 14b - Switching Loss Waveforms

International
IOR Rectifier

- ③ Repetitive rating; pulse width limited by maximum junction temperature.
- ④ Pulse width $\leq 80\mu\text{s}$; duty factor $\leq 0.1\%$.
- ⑤ Pulse width $5.0\mu\text{s}$, single shot.

Technical drawing of a mechanical part showing three views: front, top, and side. Dimensions are given in millimeters (mm) and inches (in).

Front View Dimensions:

- Overall width: 15.90 (.626)
- Overall height: 20.30 (.800)
- Internal width: 15.30 (.602)
- Internal height: 19.70 (.775)
- Central hole diameter: $\varnothing 3.65 (.143)$
- Slot width: 2.40 (.094)
- Slot depth: 14.80 (.583)
- Slot spacing: 3.40 (.133)
- Slot width (bottom): 5.45 (.215)
- Slot depth (bottom): 14.20 (.559)
- Slot width (bottom): 2.00 (.079)
- Slot depth (bottom): 4.30 (.170)
- Slot width (bottom): 1.40 (.056)
- Slot depth (bottom): 3.70 (.145)
- Slot width (bottom): 1.00 (.039)
- Slot depth (bottom): 2.20 (.087)
- Slot width (bottom): 0.80 (.031)
- Slot depth (bottom): 0.40 (.016)
- Slot width (bottom): 2.60 (.102)
- Slot depth (bottom): 2.20 (.087)

Top View Dimensions:

- Overall width: 15.90 (.626)
- Overall height: 20.30 (.800)
- Internal width: 15.30 (.602)
- Internal height: 19.70 (.775)
- Central hole diameter: $\varnothing 3.65 (.143)$
- Slot width: 2.40 (.094)
- Slot depth: 14.80 (.583)
- Slot spacing: 3.40 (.133)
- Slot width (bottom): 5.45 (.215)
- Slot depth (bottom): 14.20 (.559)
- Slot width (bottom): 2.00 (.079)
- Slot depth (bottom): 4.30 (.170)
- Slot width (bottom): 1.40 (.056)
- Slot depth (bottom): 3.70 (.145)
- Slot width (bottom): 1.00 (.039)
- Slot depth (bottom): 2.20 (.087)
- Slot width (bottom): 0.80 (.031)
- Slot depth (bottom): 0.40 (.016)
- Slot width (bottom): 2.60 (.102)
- Slot depth (bottom): 2.20 (.087)

Side View Dimensions:

- Overall width: 15.90 (.626)
- Overall height: 20.30 (.800)
- Internal width: 15.30 (.602)
- Internal height: 19.70 (.775)
- Central hole diameter: $\varnothing 3.65 (.143)$
- Slot width: 2.40 (.094)
- Slot depth: 14.80 (.583)
- Slot spacing: 3.40 (.133)
- Slot width (bottom): 5.45 (.215)
- Slot depth (bottom): 14.20 (.559)
- Slot width (bottom): 2.00 (.079)
- Slot depth (bottom): 4.30 (.170)
- Slot width (bottom): 1.40 (.056)
- Slot depth (bottom): 3.70 (.145)
- Slot width (bottom): 1.00 (.039)
- Slot depth (bottom): 2.20 (.087)
- Slot width (bottom): 0.80 (.031)
- Slot depth (bottom): 0.40 (.016)
- Slot width (bottom): 2.60 (.102)
- Slot depth (bottom): 2.20 (.087)

* LONGER LEADED (20mm)
VERSION AVAILABLE (TO-247AD)
TO ORDER ADD "-E" SUFFIX
TO PART NUMBER

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
IR EUROPEAN REGIONAL CENTRE: 439/445 Godstone Rd, Whyteleafe, Surrey CR3 OBL, UK Tel: ++ 44 (0)20 8645 8000
IR CANADA: 15 Lincoln Court, Brampton, Ontario L6T3Z2, Tel: (905) 453 2200
IR GERMANY: Saalburgstrasse 157, 61350 Bad Homburg Tel: ++ 49 (0) 6172 96590
IR ITALY: Via Liguria 49, 10071 Borgaro, Torino Tel: ++ 39 011 451 0111
IR JAPAN: K&H Bldg., 2F, 30-4 Nishi-Ikebukuro 3-Chome, Toshima-Ku, Tokyo 171 Tel: 81 (0)3 3983 0086
IR SOUTHEAST ASIA: 1 Kim Seng Promenade, Great World City West Tower, 13-11, Singapore 237994 Tel: ++ 65 (0)838 4630
IR TAIWAN: 16 Fl. Suite D. 207, Sec. 2, Tun Haw South Road, Taipei, 10673 Tel: 886-(0)2 2377 9936
Data and specifications subject to change without notice. 4/00

International
IOR Rectifier