

THIS DRAWING IS UNPUBLISHED

RELEASED FOR PUBLICATION

© COPYRIGHT

ALL RIGHTS RESERVED
BY TYCO ELECTRONICS CORPORATION.

LOC
AD

DIST	39
------	----

REVISIONS

R	IT
---	----

R	IT
---	----

DESCRIPTION

DATE _____

DIAM	
------	--

RVD




	A
1	

REVISED PER PAGE OF 04700

28 NOV 2004

25	
----	--

5

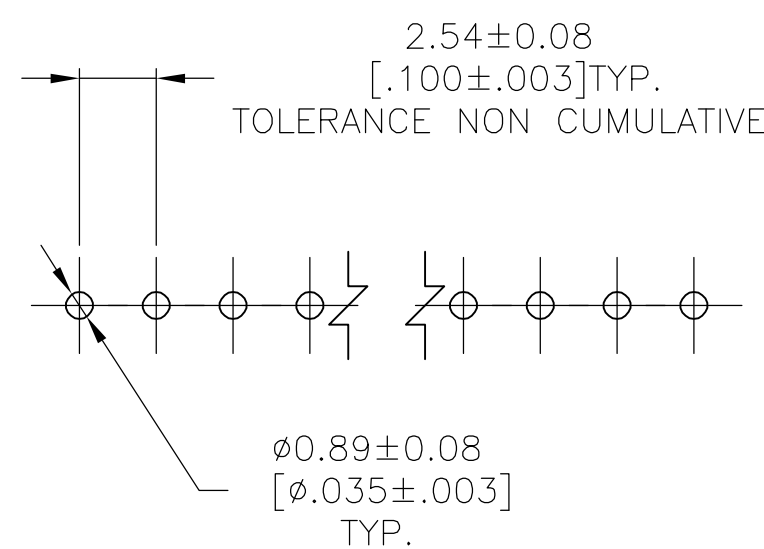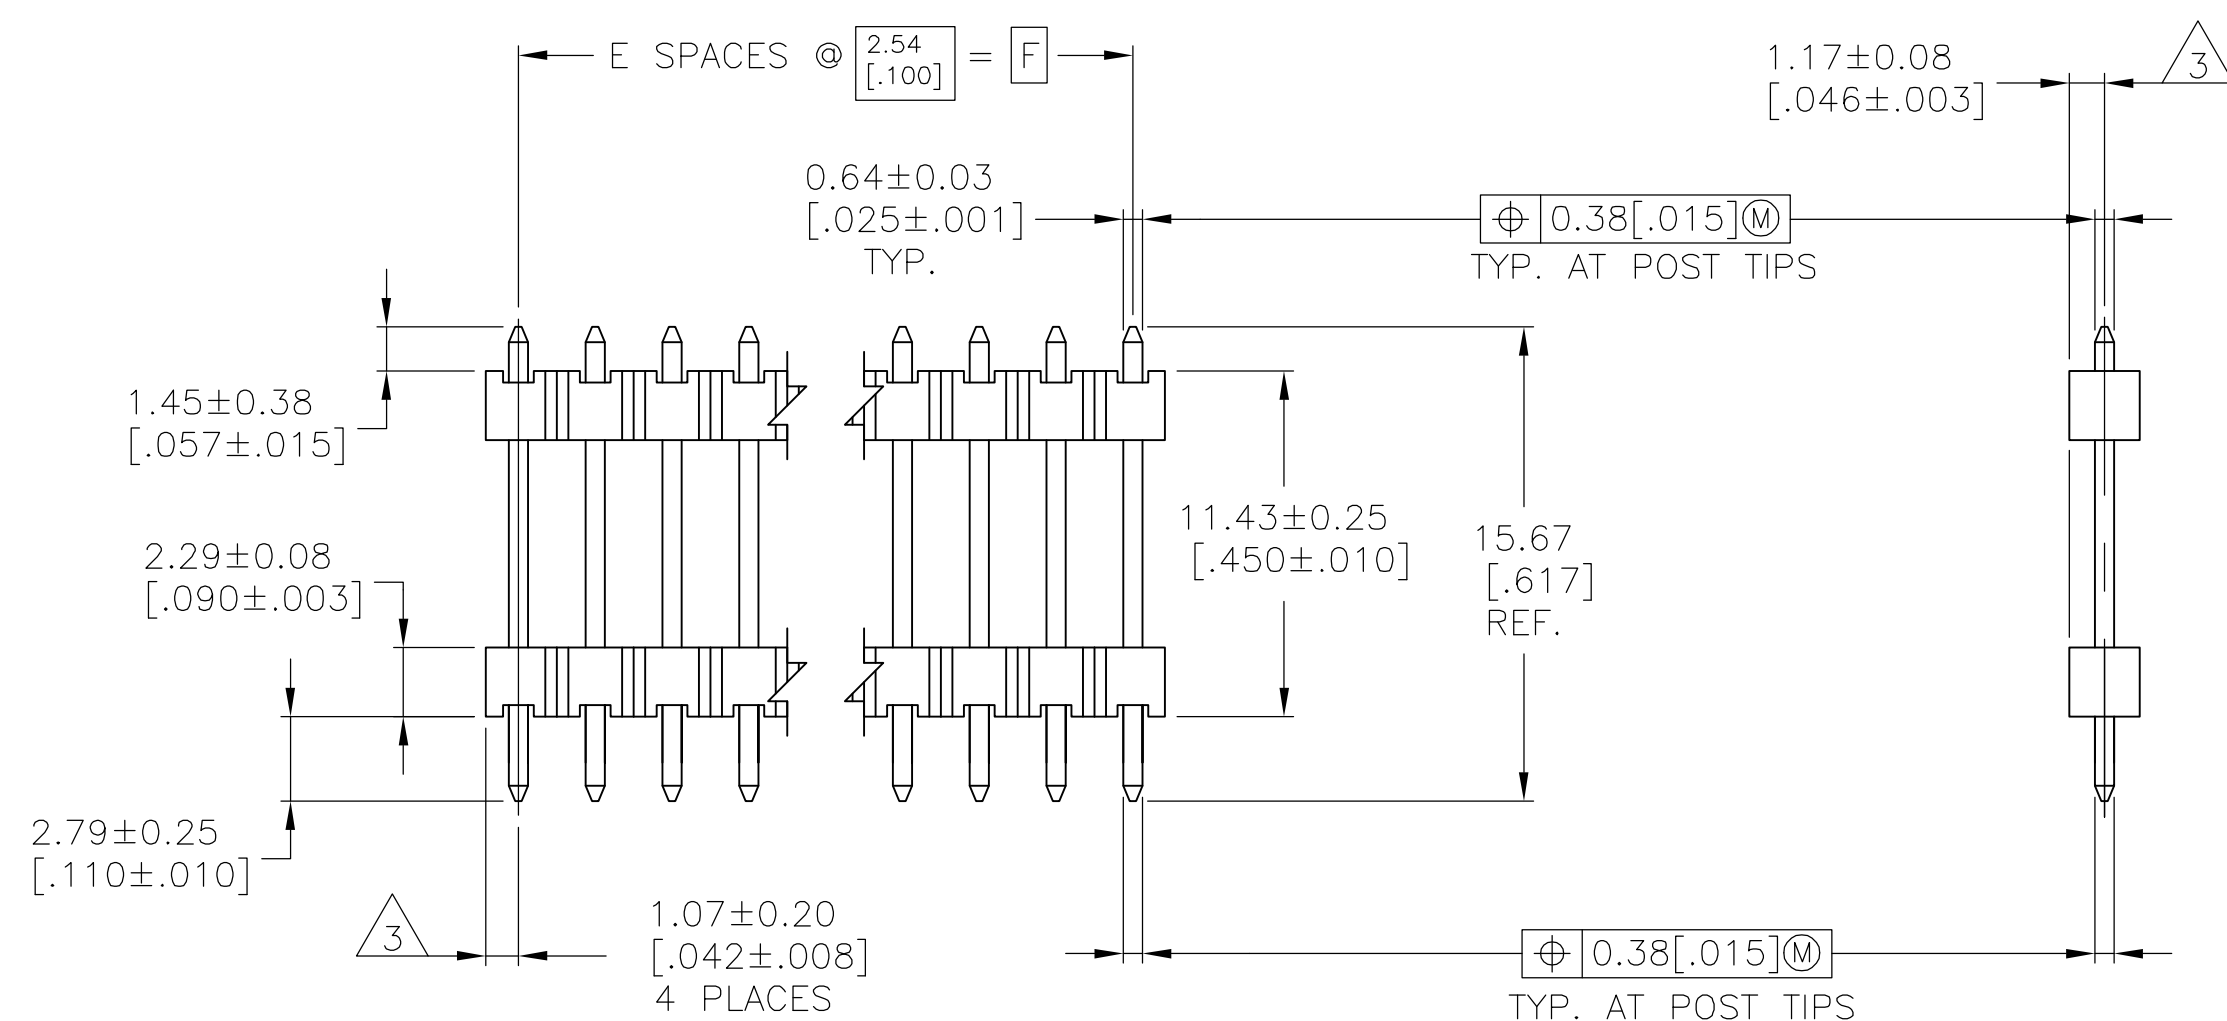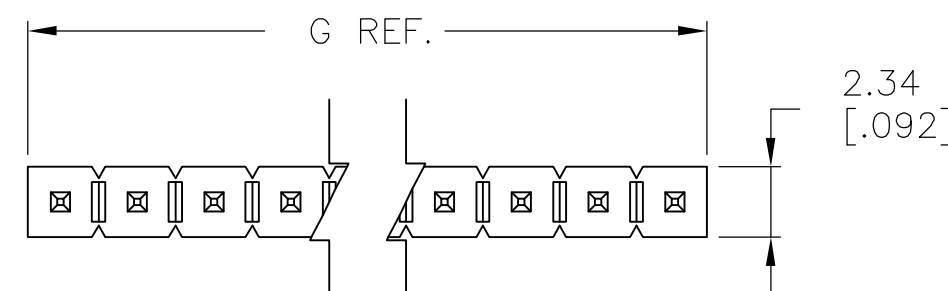

RECOMMENDED HOLE LAYOUT

1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
3. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
4. HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
5. FINISH: 0.00254-0.00508 [.000100-.000200] MATTE TIN-LEAD
OVER 0.00127 [.000050] NICKEL ENTIRE POST.
6. FINISH: 0.00254-0.00508 [.000100-.000200] MATTE TIN
OVER 0.00127 [.000050] NICKEL ENTIRE POST.

6	101.19 [3.984]	99.08 3.900	39	40	9-146460-0
6	98.65 [3.884]	96.52 3.800	38	39	8-146460-9
6	96.11 [3.784]	93.98 3.700	37	38	8-146460-8
6	93.57 [3.684]	91.44 3.600	36	37	8-146460-7
6	91.03 [3.584]	88.90 3.500	35	36	8-146460-6
6	88.49 [3.484]	86.36 3.400	34	35	8-146460-5
6	85.95 [3.384]	83.82 3.300	33	34	8-146460-4
6	83.41 [3.284]	81.28 3.200	32	33	8-146460-3
6	80.87 [3.184]	78.74 3.100	31	32	8-146460-2
6	78.33 [3.084]	76.20 3.000	30	31	8-146460-1
6	75.79 [2.984]	73.66 2.900	29	30	8-146460-0
6	73.25 [2.884]	71.12 2.800	28	29	7-146460-9
6	70.71 [2.784]	68.58 2.700	27	28	7-146460-8
6	68.17 [2.684]	66.04 2.600	26	27	7-146460-7
6	65.63 [2.584]	63.50 2.500	25	26	7-146460-6
6	63.09 [2.484]	60.96 2.400	24	25	7-146460-5
6	60.55 [2.384]	58.42 2.300	23	24	7-146460-4
6	58.01 [2.284]	55.88 2.200	22	23	7-146460-3
6	55.47 [2.184]	53.34 2.100	21	22	7-146460-2
6	52.93 [2.084]	50.80 2.000	20	21	7-146460-1
6	50.39 [1.984]	48.26 1.900	19	20	7-146460-0
6	47.85 [1.884]	45.72 1.800	18	19	6-146460-9
6	45.31 [1.784]	43.18 1.700	17	18	6-146460-8
6	42.77 [1.684]	40.64 1.600	16	17	6-146460-7
6	40.23 [1.584]	38.10 1.500	15	16	6-146460-6
6	37.69 [1.484]	35.56 1.400	14	15	6-146460-5
6	35.15 [1.384]	33.02 1.300	13	14	6-146460-4
6	32.61 [1.284]	30.48 1.200	12	13	6-146460-3
6	30.07 [1.184]	27.94 1.100	11	12	6-146460-2
6	27.53 [1.084]	25.40 1.000	10	11	6-146460-1
6	24.99 [.984]	22.86 [.900]	9	10	6-146460-0
6	22.45 [.884]	20.32 [.800]	8	9	5-146460-9
6	19.91 [.784]	17.78 [.700]	7	8	5-146460-8
6	17.37 [.684]	15.24 [.600]	6	7	5-146460-7
6	14.83 [.584]	12.70 [.500]	5	6	5-146460-6
6	12.29 [.484]	10.16 [.400]	4	5	5-146460-5
6	9.75 [.384]	7.62 [.300]	3	4	5-146460-4
6	7.21 [.284]	5.08 [.200]	2	3	5-146460-3
6	4.67 [.184]	2.54 [.100]	1	2	5-146460-2
6	2.13 [.084]	-	-	1	5-146460-1
PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

5	101.1 [3.984]	99.06 3.900	39	40	4-146460-0
5	98.65 [3.884]	96.52 3.800	38	39	3-146460-9
5	96.17 [3.784]	93.98 3.700	37	38	3-146460-8
5	93.57 [3.684]	91.44 3.600	36	37	3-146460-7
5	91.03 [3.584]	88.90 3.500	35	36	3-146460-6
5	88.49 [3.484]	86.36 3.400	34	35	3-146460-5
5	85.95 [3.384]	83.82 3.300	33	34	3-146460-4
5	83.41 [3.284]	81.28 3.200	32	33	3-146460-3
5	80.87 [3.184]	78.74 3.100	31	32	3-146460-2
5	78.33 [3.084]	76.20 3.000	30	31	3-146460-1
5	75.79 [2.984]	73.66 2.900	29	30	3-146460-0
5	73.25 [2.884]	71.12 2.800	28	29	2-146460-9
5	70.71 [2.784]	68.58 2.700	27	28	2-146460-8
5	68.17 [2.684]	66.04 2.600	26	27	2-146460-7
5	65.63 [2.584]	63.50 2.500	25	26	2-146460-6
5	63.09 [2.484]	60.96 2.400	24	25	2-146460-5
5	60.55 [2.384]	58.42 2.300	23	24	2-146460-4
5	58.01 [2.284]	55.88 2.200	22	23	2-146460-3
5	55.47 [2.184]	53.34 2.100	21	22	2-146460-2
5	52.93 [2.084]	50.80 2.000	20	21	2-146460-1
5	50.39 [1.984]	48.26 1.900	19	20	2-146460-0
5	47.85 [1.884]	45.72 1.800	18	19	1-146460-9
5	45.31 [1.784]	43.18 1.700	17	18	1-146460-8
5	42.77 [1.684]	40.64 1.600	16	17	1-146460-7
5	40.23 [1.584]	38.10 1.500	15	16	1-146460-6
5	37.69 [1.484]	35.56 1.400	14	15	1-146460-5
5	35.15 [1.384]	33.02 1.300	13	14	1-146460-4
5	32.61 [1.284]	30.48 1.200	12	13	1-146460-3
5	30.07 [1.184]	27.94 1.100	11	12	1-146460-2
5	27.53 [1.084]	25.40 1.000	10	11	1-146460-1
5	24.99 [.984]	22.86 [.900]	9	10	1-146460-0
5	22.45 [.884]	20.32 [.800]	8	9	146460-9
5	19.91 [.784]	17.78 [.700]	7	8	146460-8
5	17.37 [.684]	15.24 [.600]	6	7	146460-7
5	14.83 [.584]	12.70 [.500]	5	6	146460-6
5	12.29 [.484]	10.16 [.400]	4	5	146460-5
5	9.75 [.384]	7.62 [.300]	3	4	146460-4
5	7.21 [.284]	5.08 [.200]	2	3	146460-3
5	4.67 [.184]	2.54 [.100]	1	2	146460-2
5	2.13 [.084]	- -	-	1	146460-1
PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG E. HOFFMAN 1/17/96		ttyco <i>Electronics</i> Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		9 P/LC ± 2 P/LC ± 0.51[.02] 2 P/LC ± 0.127[.005] 2 P/LC ± 0.127[.005] 2 ANGLES ± FINISH SEE TABLE		HEADER ASSEMBLY, MOD II, STACKING, SINGLE ROW, .025 SQ.POST, UNSHROUDED	
MATERIAL		APPLICATION SPEC		SIZE A1	
		WEIGHT		CAGE CODE 00779	
CUSTOMER DRAWING		DRAWING NO C-146460		RESTRICTED TO	
		SCALE 4:1		SHEET 1 OF 1	
				REV A	