








FCIconnect.com

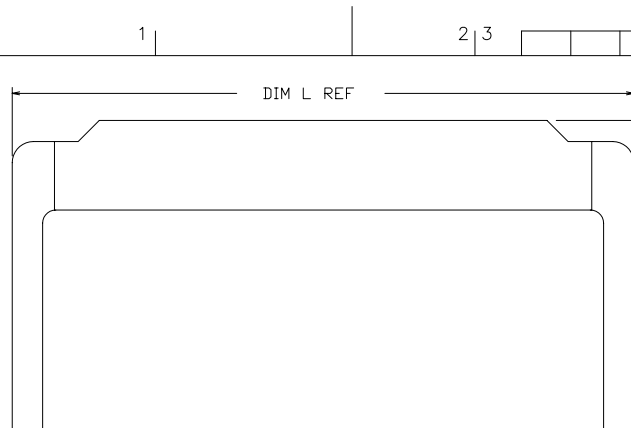


Copyright FCI

form: A3

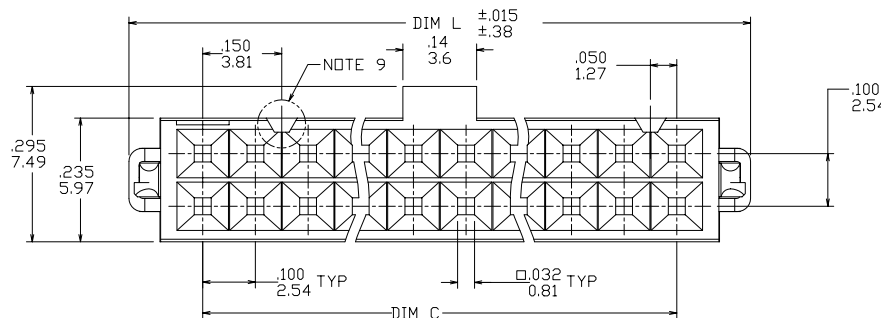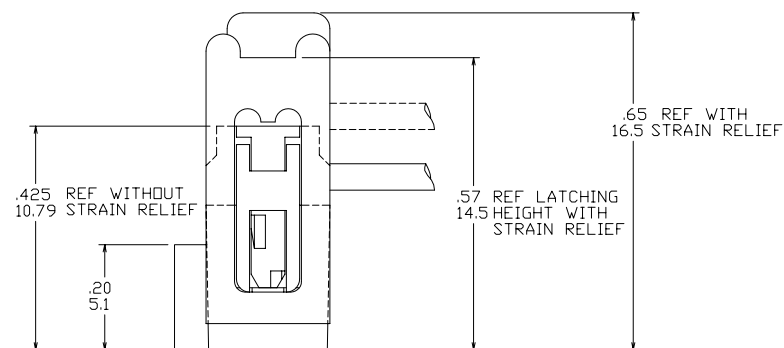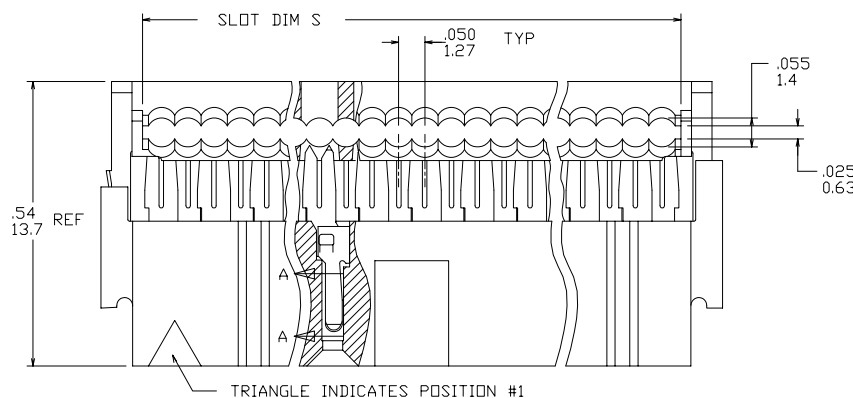


W/O CENTER KEY



mat'l. code				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family QUICKIE									
ltr	ecn no	dr	date	tolerances unless otherwise specified						title									
A	RELEASE	MRC	1/30/91	angles	linear	.XX±.01/.3		INCH/MM 	BeCu QUICKIE II										
B	V11591	JM	7/10/91			.xxx±.005/.13													
C	V22169	MSC	5/21/92			0'±2'	.xxxx±.0020/.05												
D	V23886	MSC	12/22/92	dr	M.CORNMAN	1/30/91	scale 10:1 						dwg no 88282		sheet 1 of 2 size A3				
E	V30562	PDP	5/11/93	enr	M.SMYK	1/30/91													
F	M06-0282	MHT	7/26/06	chr	M.SMYK	1/30/91													
				appd	M.SMYK	1/30/91													
sheet index		revision sheet		F	F														
				1	2														


PRODUCT NO.	SIZE	DIM L	DIM S	DIM C
88282-X10	2X5	.680/17.27	.520/13.21	.400/10.16
-X14	2X7	.880/22.35	.720/18.29	.600/15.24
-X16	2X8	.980/24.89	.820/20.83	.700/17.78
-X20	2X10	1.180/29.97	1.020/25.91	.900/22.86
-X24	2X12	1.380/35.05	1.220/30.99	1.100/27.94
-X26	2X13	1.480/37.59	1.320/33.53	1.200/30.48
-X30	2X15	1.680/42.67	1.520/38.61	1.400/35.56
-X34	2X17	1.880/47.75	1.720/43.69	1.600/40.64
-X40	2X20	2.180/55.37	2.020/51.31	1.900/48.26
-X44	2X22	2.380/60.45	2.220/56.39	2.100/53.34
-X50	2X25	2.680/68.07	2.520/64.01	2.400/60.96
88282-X60	2X30	3.180/80.77	3.020/76.71	2.900/73.66

DASH NO	COVER		POLARIZATION	STRAIN RELIEF
	STYLE	ORIENTATION		
-0XX	THRU SOLID	DUAL ENTRY	CENTER KEY & DUAL POL.	YES
-1XX	THRU SOLID	DUAL ENTRY	CENTER KEY & DUAL POL.	NO
-2XX	THRU SOLID	DUAL ENTRY	DUAL POL.	YES
-3XX	THRU SOLID	DUAL ENTRY	DUAL POL.	NO

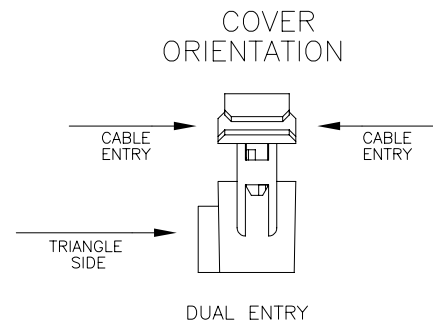


NOTES:

1. TERMINAL MATERIAL: BECU ALLOY, UNS-C17200 HM
2. TERMINAL PLATING: 100u"/2.54u MIN Ni UNDERPLATE OVER ENTIRE TERMINAL. 50u"/1.27u MIN Au IN DISCONNECT AREA ONLY, AND 60u"/1.52u TIN-LEAD WIRE ON TERMINATION AREA ONLY.
3. MOLDING MATERIAL: BASE & COVER- GLASS FILLED POLYESTER, FLAME RETARDANT PER UL94V-0, COLOR- BLUE. MOLDING MATERIAL: STRAIN RELIEF-UNFILLED POLYESTER, FLAME RETARDANT PER UL94V-0
4. CONNECTOR ASSEMBLIES PACKAGED IN TUBES.
5. THE FIRST TWO AND THE LAST TWO CAVITY POSITIONS ARE IDENTIFIED BY NUMBER.
6. POLARIZING FEATURES ARE DESCRIBED IN TABLE.
- 7 SECTION B-B SHOWS THE MINIMUM ACCEPTABLE AREA IN WHICH THE MINIMUM CONTACT PLATING THICKNESS MUST BE PRESENT.
- 8 STRAIN RELIEF DIM APPLIES WHEN DATUM -Z- IS HELD IN A RESTRAINED CONDITION.
- 9 THE POLARIZING FEATURE ON THIS END IS NONEXISTENT ON 2x5 AND 2x7 POSITION CONNECTORS.



SECTION A-A



SECTION B-B
NOTE 7

mat'l. code				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection INCH/MM	product family QUICKIE
ltr	ecn	no	dr	date	tolerances unless otherwise specified		title
F					angles linear	.XX±.01/.3 .XXX±.005/.13 .XXXX±.0020/.051	BeCu QUICKIE II
					0°±2'	scale 10:1	
			dr	M.CORNMAN	1/30/91		dwg no
			enr	M.SMYK	1/30/91		sheet2 of 2
			chr	M.SMYK	1/30/91		size
			appd	M.SMYK	1/30/91		A3
sheet	revision						type
index	sheet						Product Customer Drawing