


CTC0 Series

From .22 μ H to 220 μ H

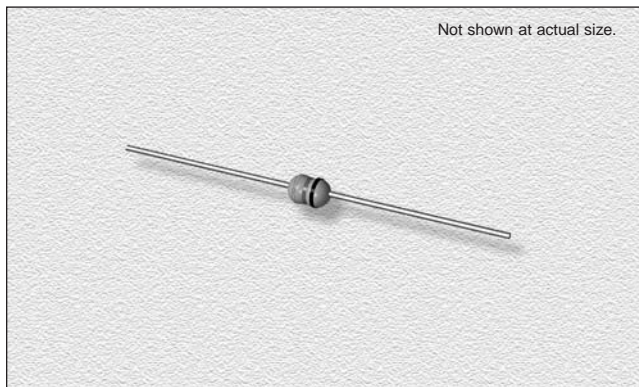

CHARACTERISTICS

Description: Axial leaded conformal coated inductor

Applications: Used in less harsh environments. Ideal for less critical RFL/EMI applications

Operating Temperature: -55°C to +125°C

Inductance Tolerance: $\pm 5\%$, $\pm 10\%$, $\pm 20\%$

Testing: Inductance and Q are tested on an HP4285A at specified frequency

Packaging: Bulk, 1000 pieces per bag, Tape & Reel - 5000 pieces per reel

Material: Magnetic core treated with epoxy resin for protection and longer reliability

Marking: Parts are EIA three color banded indicating inductance value and tolerance

Miscellaneous: Other values available

Additional Information: Additional electrical & physical information available upon request

Samples available. See website for ordering information.


SPECIFICATIONS

Please specify tolerance code when ordering.
CTC0-R22_ ← J = $\pm 5\%$, K = $\pm 10\%$, M = $\pm 20\%$

Part Number	Inductance (μ H)	L Test Freq. (MHz)	Q Factor Min.	Q Test Freq. (MHz)	SRF Min. (MHz)	DCR Max. (Ω)	Rated DC (mA)
CTC0-R22_	.22	25.2	42	25.2	150	.40	400
CTC0-R27_	.27	25.2	42	25.2	150	.43	380
CTC0-R33_	.33	25.2	42	25.2	150	.48	370
CTC0-R39_	.39	25.2	42	25.2	150	.51	350
CTC0-R47_	.47	25.2	42	25.2	150	.56	330
CTC0-R56_	.56	25.2	42	25.2	150	.61	320
CTC0-R68_	.68	25.2	50	25.2	150	.67	310
CTC0-R82_	.82	25.2	50	25.2	150	.71	290
CTC0-1R0_	1.0	25.2	50	25.2	150	.80	270
CTC0-1R2_	1.2	7.96	50	7.96	110	.90	260
CTC0-1R5_	1.5	7.96	50	7.96	80	1.00	250
CTC0-1R8_	1.8	7.96	50	7.96	80	1.10	240
CTC0-2R2_	2.2	7.96	50	7.96	45	1.20	230
CTC0-2R7_	2.7	7.96	50	7.96	40	1.30	220
CTC0-3R3_	3.3	7.96	55	7.96	38	1.40	210
CTC0-3R9_	3.9	7.96	55	7.96	35	1.60	200
CTC0-4R7_	4.7	7.96	55	7.96	32	1.70	190
CTC0-5R6_	5.6	7.96	55	7.96	30	1.90	180
CTC0-6R8_	6.8	7.96	55	7.96	28	2.00	175
CTC0-8R2_	8.2	7.96	55	7.96	26	2.20	165
CTC0-100_	10	7.96	55	7.96	24	2.50	160
CTC0-120_	12	2.52	55	2.52	22	2.50	150
CTC0-150_	15	2.52	55	2.52	20	2.80	145
CTC0-180_	18	2.52	55	2.52	18	3.10	140
CTC0-220_	22	2.52	55	2.52	17	3.40	130
CTC0-270_	27	2.52	55	2.52	16	4.30	80
CTC0-330_	33	2.52	55	2.52	14	4.70	76
CTC0-390_	39	2.52	55	2.52	13	5.20	74
CTC0-470_	47	2.52	55	2.52	12	5.80	70
CTC0-560_	56	2.52	55	2.52	11	6.40	68
CTC0-680_	68	2.52	55	2.52	10	7.20	64
CTC0-820_	82	2.52	55	2.52	9.5	11.0	46
CTC0-101_	100	.796	55	.796	9.0	12.0	44
CTC0-121_	120	.796	55	.796	8.0	13.0	43
CTC0-151_	150	.796	55	.796	6.0	16.0	40
CTC0-181_	180	.796	55	.796	5.5	18.0	38
CTC0-221_	220	.796	55	.796	5.0	20.0	35

PHYSICAL DIMENSIONS

Size	A	B	C	24 AWG
mm	3.4	2.2 \pm 0.2	26.6	0.5110
inches	0.135	0.09 \pm 0.01	1.05	0.2010

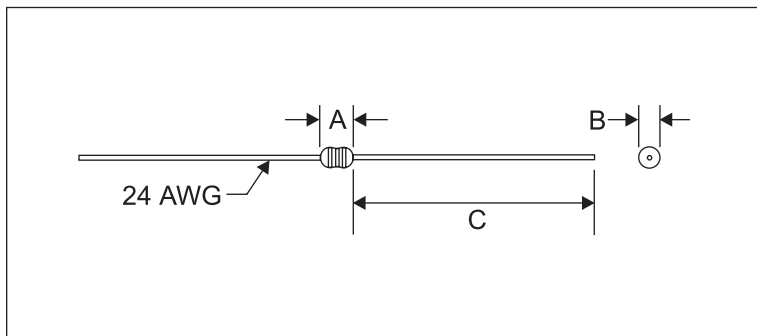

06.11.03

Manufacturer of Inductors, Chokes, Coils, Beads, Transformers & Toroids

800-684-5322 Inside US 949-453-1811 Outside US

Copyright © 2003 by CT Magnetics, DBA Central Technologies. All rights reserved.

CT Magnetics reserves the right to make improvements or change specifications without notice

