
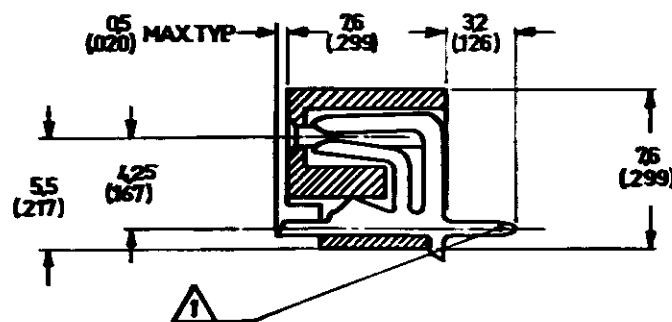
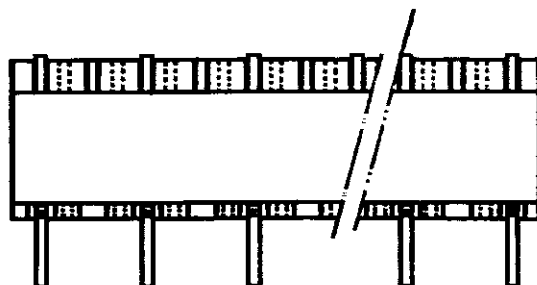


DRAWING MADE IN AMERICAN PROJECTION

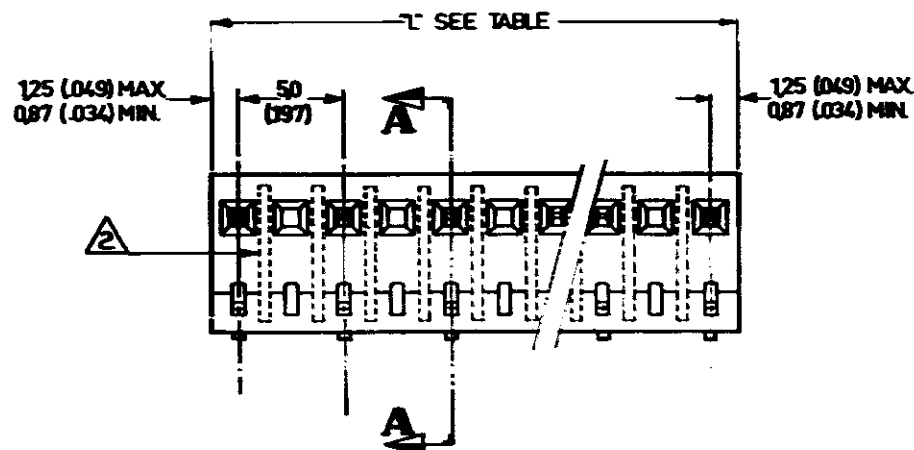

SECTION A-A

NOTES:

1

PREFERRED HOLE SIZE: $0.8 \begin{smallmatrix} +0.1 \\ -0.0 \end{smallmatrix}$ (0.031) $0.9 \begin{smallmatrix} +0.1 \\ -0.0 \end{smallmatrix}$ (0.035) $1.0 \begin{smallmatrix} +0.1 \\ -0.0 \end{smallmatrix}$ (0.039)

DEPENDING ON NUMBER OF POSITIONS OF CONNECTOR. FOR MORE INFORMATION PLEASE CONTACT PRODUCT-ENGINEERING DEPARTMENT.

2

VERSIONS WITH OR WITHOUT SLOTS BETWEEN CAVITIES CAN BE USED INDIFFERENTLY.

L MAX			NUMBER OF LOADED POS.	ORDER NO.
	mm	(inches)		
12.6		.497	3	163685-1
17.6		.694	4	163685-2
22.6		.890	5	163685-3
27.6		1.087	6	163685-4
32.6		1.284	7	163685-5
37.6		1.481	8	163685-6
42.6		1.678	9	163685-7
47.6		1.875	10	163685-8
52.6		2.071	11	163685-9
57.6		2.268	12	1-163685-1
62.6		2.465	13	1-163685-2
67.6		2.662	14	1-163685-3
72.6		2.859	15	1-163685-4
77.6		3.055	16	1-163685-5
82.6		3.253	17	1-163685-6
87.6		3.449	18	1-163685-7
92.6		3.646	19	1-163685-8
97.6		3.843	20	1-163685-9

DOC. CENTRE

29 OKT. 1993

MATERIAL		HOUSING: GREY NYLON SE1-802	
		RECEPTACLES: BRASS TINPLATED OVER NICKEL-BARRIER	
CUSTOMER COPY FOR REFERENCE ONLY			
C-163685	DATE	16.3.73	 AMP-HOLLAND N.V. LINDENDIJKEN HOLLAND
	DATE	16.3.73	
	DATE	16.3.73	
	DATE	16.3.73	
SCALE 4:1		LOC H	SIZE B
FEMALE CONN. FOR COMMERCIAL INTERCONNECTION SYSTEM 5.0 mm PITCH		C-163685	
		Top entry	

DIMENSIONS IN MM DO NOT SCALE PRINT