

5V AC-DC Switching Power Supply



Specifications

AC Input

Voltage Range: 90 – 264 VAC
Input Frequency: 47 – 63 Hz
Inrush Current: 30A Max


DC Output

Voltage Range: 4.5V – 5.6V
Current Range: 0.1A – 0.5A



Reliability

Insulation Resistance: 50MΩ Min (Input to Output, DC 500V)
MTBF: 50000 Hours

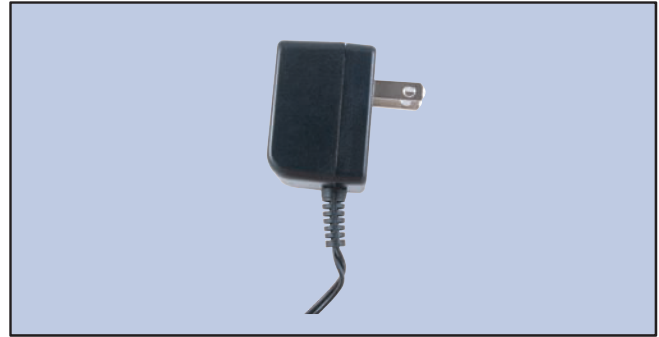

Plug Types



Ordering Information

NTE Type No.	DC Output		Plug Type
	Amps	Wattage	
57-5D-500-1	500mA	2.5	2.1mm x 5.5mm Jack
57-5D-500-2	500mA	2.5	2.5mm x 5.5mm Jack
57-5D-500-3	500mA	2.5	1.35mm ID x 3.5mm OD Plug
57-5D-500-4	500mA	2.5	2.1mm ID x 5.5mm OD Plug
57-5D-500-5	500mA	2.5	2.5mm ID x 5.5mm OD Plug

NEW
NEW

6V AC-DC Switching Power Supply



Specifications

AC Input

Voltage Range: 90 – 264 VAC
Input Frequency: 47 – 63 Hz
Inrush Current: 30A Max

DC Output

Voltage Range: 5.5V – 6.8V
Current Range: 0.1A – 0.5A



Reliability

Insulation Resistance: 50MΩ Min (Input to Output, DC 500V)
MTBF: 50000 Hours



Plug Types



Ordering Information

NTE Type No.	DC Output		Plug Type
	Amps	Wattage	
57-6D-500-1	500mA	3	2.1mm x 5.5mm Jack
57-6D-500-2	500mA	3	2.5mm x 5.5mm Jack
57-6D-500-3	500mA	3	1.35mm ID x 3.5mm OD Plug
57-6D-500-4	500mA	3	2.1mm ID x 5.5mm OD Plug
57-6D-500-5	500mA	3	2.5mm ID x 5.5mm OD Plug

NEW
NEW