

## MINIATURE RELAY

## 2 POLES—1 to 2 A (FOR SIGNAL SWITCHING)


# FBR46 SERIES

## RoHS compliant



## ■ FEATURES

- Miniature size  
About 50% smaller in volume compared with the FBR240 series used mainly in communication equipment.
  - High surge voltage  
2,500 V minimum of surge strength (Bellcore standard), and 1,500 VAC minimum of dielectric strength between coil and contact (-15, -16 type).
  - Low power consumption  
85 mW of operate power (150 mW of nominal power consumption) by built-in permanent magnet.
  - Shipping tube package
  - RoHS compliant since date code: 0433A
- Please see page 7 for more information

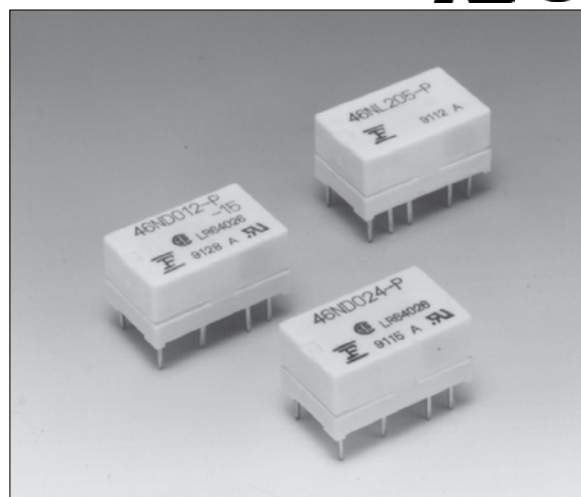

## ■ ORDERING INFORMATION

|           |       |     |     |     |     |     |      |
|-----------|-------|-----|-----|-----|-----|-----|------|
|           | FBR46 | N   | D   | 012 | -P  | -15 | -CSA |
| [Example] | (a)   | (b) | (*) | (c) | (d) | (e) | (f)  |

|     |                      |                                                                                                                                                                                                                     |
|-----|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| (a) | Series Name          | FBR46 : FBR46 Series                                                                                                                                                                                                |
| (b) | Enclosure            | N : Plastic sealed                                                                                                                                                                                                  |
| (*) | Coil Type            | D : Standard, -15, -16 (DC coil)<br>G : 65% Operate type                                                                                                                                                            |
| (c) | Nominal Voltage      | (Example) Standard, -15, -16 type (Example) Latching type<br>005: 5 VDC 05: 5 VDC<br>012: 12 VDC 12: 12 VDC<br>(refer to the COIL DATA CHART)                                                                       |
| (d) | Contact Material     | –P : Gold-overlay silver-palladium                                                                                                                                                                                  |
| (e) | Dielectric Strength  | Nil : Between coil and contacts 1,000 VAC, between contacts 750 VAC<br>-15 : Between coil and contacts 1,500 VAC, between contacts 750 VAC<br>-16 : Between coil and contacts 1,500 VAC, between contacts 1,000 VAC |
| (f) | Safety Specification | Nil : Standard (UL114 recognized)<br>-CSA : UL114 + CSA recognized                                                                                                                                                  |

Note: The designation name is stamped on the top of the relay case as follows:  
(Example) Designation ordered: FBR46ND012-P  
Stamp: 46ND012-P

# FBR46 SERIES

## ■ COIL DATA CHART

### 1. STANDARD (D type)

| MODEL        | Nominal voltage | Coil resistance (±10%) | Nominal current (at nominal voltage) approx. | Must operate voltage*1      | Must release voltage*1     | Nominal power                       | Operate power      | Coil temperature rise               |
|--------------|-----------------|------------------------|----------------------------------------------|-----------------------------|----------------------------|-------------------------------------|--------------------|-------------------------------------|
| FBR46ND003-P | 3 VDC           | 60 Ω                   | 50 mA                                        | 75% max. of nominal voltage | 5% min. of nominal voltage | Approx. 150 mW (at nominal voltage) | Approx. 85 mW max. | Approx. 25 deg (at nominal voltage) |
| FBR46ND005-P | 5 VDC           | 167 Ω                  | 30 mA                                        |                             |                            |                                     |                    |                                     |
| FBR46ND006-P | 6 VDC           | 240 Ω                  | 25 mA                                        |                             |                            |                                     |                    |                                     |
| FBR46ND009-P | 9 VDC           | 540 Ω                  | 17 mA                                        |                             |                            |                                     |                    |                                     |
| FBR46ND012-P | 12 VDC          | 960 Ω                  | 13 mA                                        |                             |                            |                                     |                    |                                     |
| FBR46ND024-P | 24 VDC          | 2,880 Ω                | 8 mA                                         |                             |                            | 200 mW                              | 112 mW             | 30 deg                              |

\*1: Specified values are subject to pulse wave voltage.

Note: All values in the table are measured at 20°C

### 2. 65% OPERATE TYPE (G type)

| MODEL        | Nominal voltage | Coil resistance (±10%) | Nominal current (at nominal voltage) approx. | Must operate voltage*1      | Must release voltage*1      | Nominal power                       | Operate power       | Coil temperature rise               |
|--------------|-----------------|------------------------|----------------------------------------------|-----------------------------|-----------------------------|-------------------------------------|---------------------|-------------------------------------|
| FBR46NG003-P | 3 VDC           | 36 Ω                   | 83 mA                                        | 65% max. of nominal voltage | 10% min. of nominal voltage | Approx. 250 mW (at nominal voltage) | Approx. 106 mW max. | Approx. 35 deg (at nominal voltage) |
| FBR46NG005-P | 4.5 VDC         | 81 Ω                   | 56 mA                                        |                             |                             |                                     |                     |                                     |
| FBR46NG006-P | 6 VDC           | 144 Ω                  | 41 mA                                        |                             |                             |                                     |                     |                                     |
| FBR46NG009-P | 9 VDC           | 324 Ω                  | 27 mA                                        |                             |                             |                                     |                     |                                     |
| FBR46NG012-P | 12 VDC          | 576 Ω                  | 20 mA                                        |                             |                             |                                     |                     |                                     |
| FBR46NG024-P | 24 VDC          | 2,304 Ω                | 10 mA                                        |                             |                             |                                     |                     |                                     |

\*1: Specified values are subject to pulse wave voltage.

Note: All values in the table are measured at 20°C

### 3. HIGH DIELECTRIC STRENGTH TYPE (-15, -16 type)

| MODEL           |                 | Nominal voltage | Coil resistance (±10%) | Nominal current (at nominal voltage) approx. | Must operate voltage*1      | Must release voltage*1     | Nominal power                       | Operate power       | Coil temperature rise               |
|-----------------|-----------------|-----------------|------------------------|----------------------------------------------|-----------------------------|----------------------------|-------------------------------------|---------------------|-------------------------------------|
| -15 type        | -16 type        |                 |                        |                                              |                             |                            |                                     |                     |                                     |
| FBR46ND003-P-15 | FBR46ND003-P-16 | 3 VDC           | 45 Ω                   | 67 mA                                        | 75% max. of nominal voltage | 5% min. of nominal voltage | Approx. 200 mW (at nominal voltage) | Approx. 112 mW max. | Approx. 30 deg (at nominal voltage) |
| FBR46ND005-P-15 | FBR46ND005-P-16 | 5 VDC           | 125 Ω                  | 40 mA                                        |                             |                            |                                     |                     |                                     |
| FBR46ND006-P-15 | FBR46ND006-P-16 | 6 VDC           | 180 Ω                  | 33 mA                                        |                             |                            |                                     |                     |                                     |
| FBR46ND009-P-15 | FBR46ND009-P-16 | 9 VDC           | 405 Ω                  | 22 mA                                        |                             |                            |                                     |                     |                                     |
| FBR46ND012-P-15 | FBR46ND012-P-16 | 12 VDC          | 720 Ω                  | 17 mA                                        |                             |                            |                                     |                     |                                     |
| FBR46ND024-P-15 | FBR46ND024-P-16 | 24 VDC          | 2,304 Ω                | 10 mA                                        |                             |                            | 250 mW                              | 140 mW              | 35 deg                              |

\*1: Specified values are subject to pulse wave voltage.

Note: All values in the table are measured at 20°C.

## ■ SPECIFICATIONS


| Item       |                                          |              | Standard                                                                                     | -65% operate | -15 type      | -16 type |
|------------|------------------------------------------|--------------|----------------------------------------------------------------------------------------------|--------------|---------------|----------|
| Contact    | Arrangement and Style                    |              | 2 form C (DPDT), bifurcated                                                                  |              |               |          |
|            | Material                                 |              | Gold-overlay silver-palladium                                                                |              |               |          |
|            | Resistance (initial)                     |              | Maximum 100 mΩ (at 0.1 A 6 VDC)                                                              |              |               |          |
|            | Ratings (resistive)                      |              | 0.5 A 120 VAC or 1 A 30 VDC                                                                  |              |               |          |
|            | Maximum Carrying Current                 |              | 1.25 A                                                                                       |              |               |          |
|            | Maximum Switching Power                  |              | 60 AV or 30 W                                                                                |              |               |          |
|            | Max. Switching Voltage* <sup>1</sup>     |              | 125 V                                                                                        |              |               |          |
|            | Maximum Switching Current                |              | 1 A                                                                                          |              |               |          |
|            | Minimum Switching load* <sup>2</sup>     |              | 0.01 mA 10 mVDC (reference)                                                                  |              |               |          |
|            | Electrostatic Capacity (reference)       |              | Approximately 2 pF (between coil and contacts)<br>Approximately 1 pF (between open contacts) |              |               |          |
| Coil       | Nominal power (at 20°C)                  |              | 150 to 200 mW                                                                                | 205 mW       | 200 to 250 mW |          |
|            | Operate power (at 20°C)                  |              | 85 to 112 mW                                                                                 | 106 mW       | 112 to 114 mW |          |
|            | Operating Temperature                    |              | -30°C to +70°C (no frost) (refer to the CHARACTERISTIC DATA)                                 |              |               |          |
|            | Operating Humidity                       |              | 45 to 85%RH                                                                                  |              |               |          |
| Time Value | Operate (at nominal voltage)             |              | Maximum 5 ms                                                                                 |              |               |          |
|            | Release (at nominal voltage)             |              | Maximum 5 ms                                                                                 |              |               |          |
| Life       | Mechanical                               |              | 50 × 10 <sup>6</sup> operations minimum                                                      |              |               |          |
|            | Electrical (refer to the REFERENCE DATA) | DC           | 2 × 10 <sup>5</sup> operations minimum (at contact rating)                                   |              |               |          |
|            |                                          | AC           | 1 × 10 <sup>5</sup> operations minimum (at contact rating)                                   |              |               |          |
| Other      | Vibration Resistance                     |              | 10 to 55 Hz (double amplitude of 1.5 mm)                                                     |              |               |          |
|            | Shock Resistance                         | Misoperation | 500 m/s <sup>2</sup> (11 ± <sup>1</sup> ms)                                                  |              |               |          |
|            |                                          | Endurance    | 1,000 m/s <sup>2</sup> (11 ± <sup>1</sup> ms)                                                |              |               |          |
|            | Weight                                   |              | Approximately 2.5g                                                                           |              |               |          |

\*<sup>1</sup> If the switching voltage exceeds the rated contact voltage, reduce the current. The current values vary according to the type of load.

\*<sup>2</sup> Values when switching a resistive load at normal room temperature and humidity and in a clean environment. The minimum switching load varies with the switching frequency and operation environment.

# FBR46 SERIES

## ■ INSULATION


| Item                              | Standard                                                                                                                                           | 65% operate | -15 type                                                                                                                                                                                                                                                                                                        | -16 type                                                                                     |
|-----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|
| Resistance (initial)<br>(500 VDC) | Minimum 1,000 MΩ 1 min.                                                                                                                            |             |                                                                                                                                                                                                                                                                                                                 |                                                                                              |
| Dielectric Strength               | open contacts<br>720VAC - 1 min.<br>coil and contact<br>adjacent contact<br>1,000 VAC -1min.                                                       |             | open contacts<br>750VAC<br>coil and contact<br>adjacent contact<br>1,500 VAC -1min.                                                                                                                                                                                                                             | open contacts<br>1,000VAC -1min.<br>coil and contact<br>adjacent contact<br>1,500 VAC -1min. |
| Surge Voltage                     | non-conducted terminals<br>1,500V<br>10 x 700μs standard wave<br> |             | open contact<br>1,500V<br>10 x 700μs standard wave<br><br><br>coil and contact<br>adjacent contact<br>2,500V<br>2 x 10μs standard wave<br> |                                                                                              |

## ■ SAFETY STANDARDS


| Type | Compliance                         | Contact rating                                                             |
|------|------------------------------------|----------------------------------------------------------------------------|
| UL   | UL 114<br><br>E63615               | Flammability: UL 94-V0 (plastics)<br>0.3A, 250VAC (resistive)<br>1A, 30VDC |
| CSA  | C22.2 No. 14<br>LR 40304, LR 64026 |                                                                            |

## CHARACTERISTIC DATA


Range of operation temperature and voltage [D type]

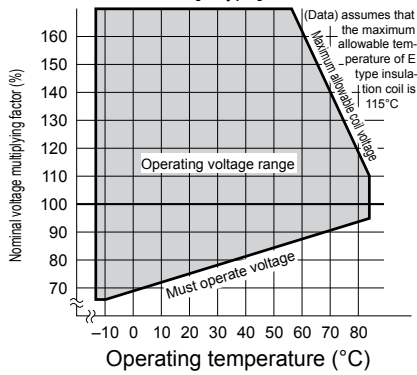


Range of operation temperature and voltage [G type]

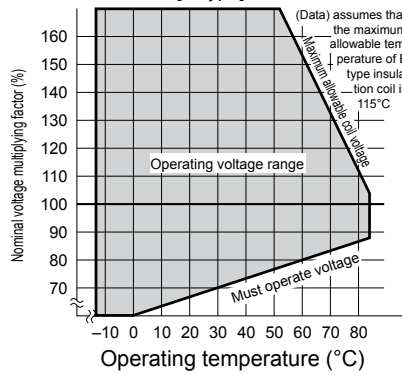


Range of operation temperature and voltage [-15,-16 type]

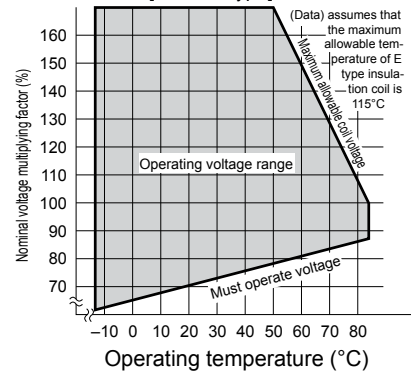

Maximum switching capacity

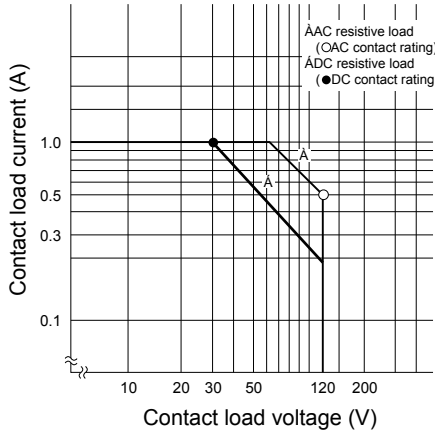


Life curve

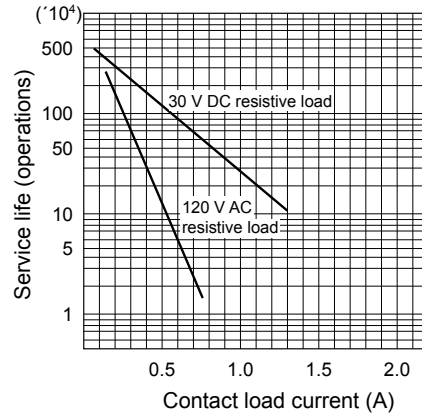


## REFERENCE DATA


Distribution of operate and release voltage

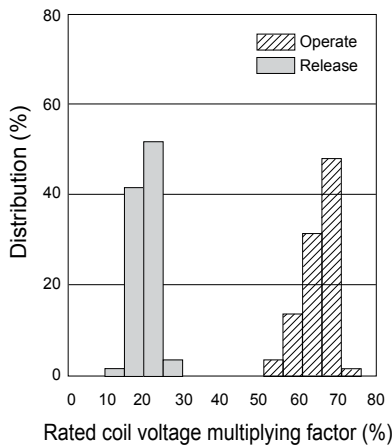

Distribution of operate and release time

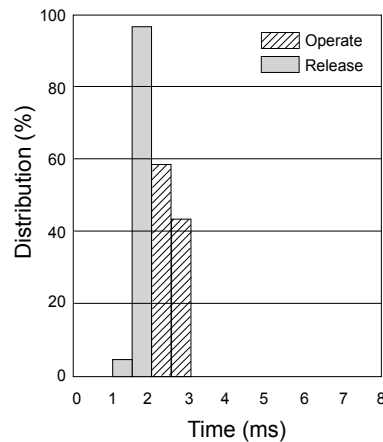


Distribution of contact resistance

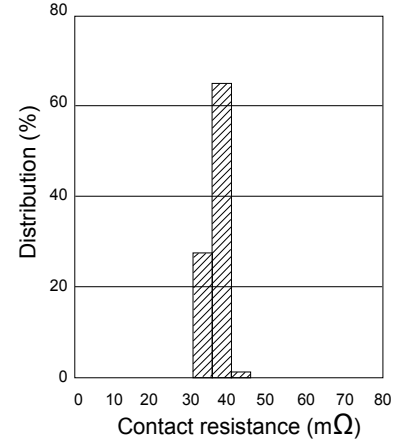


# FBR46 SERIES

## ■ DIMENSIONS


### ■ Dimensions

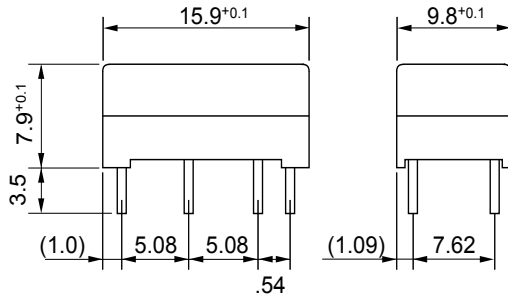


### ■ Schematics (BOTTOM VIEW)




### ■ PC board mounting hole layout (BOTTOM VIEW)




### ■ Tube carrier

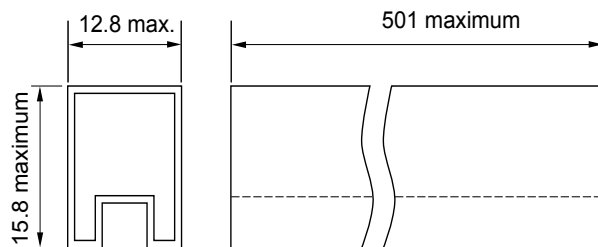


### ■ Dimensions (Latching type)

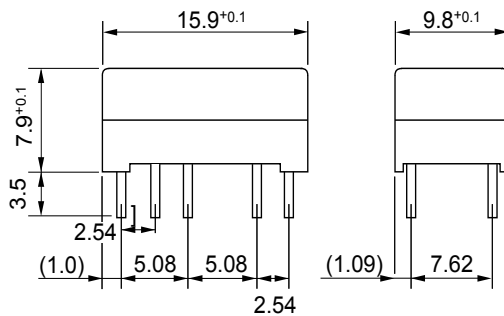


### ■ Schematics (BOTTOM VIEW)



### ■ PC board mounting hole layout (BOTTOM VIEW)



### ■ Tube carrier

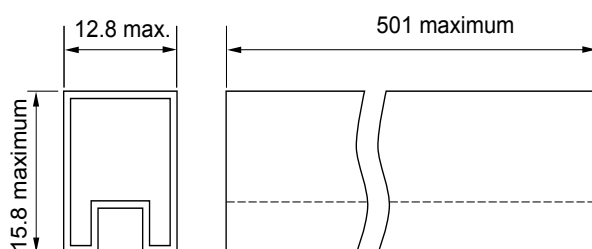

Note: ·No 2, 11 terminals are for double winding latching type only.  
·( ⊕ ) ( ⊖ ) are reset polarity for single winding latching type.  
·The terminal number is not shown on the relay.

Unit: mm

## RoHS Compliance and Lead Free Relay Information

### 1. General Information

- Relays produced after the specific date code that is indicated on each data sheet are lead-free now. Most of our signal and power relays are lead-free. Please refer to Lead-Free Status Info. (<http://www.fujitsu.com/us/downloads/MICRO/fcai/relays/lead-free-letter.pdf>)
- Lead free solder paste currently used in relays is Sn-3.0Ag-0.5Cu.
- All signal and most power relays also comply with RoHS. Please refer to individual data sheets. Relays that are RoHS compliant do not contain the 5 hazardous materials that are restricted by RoHS directive (lead, mercury, chromium IV, PBB, PBDE).
- It has been verified that using lead-free relays in leaded assembly process will not cause any problems (compatible).
- "LF" is marked on each outer and inner carton. (No marking on individual relays).
- To avoid leaded relays (for lead-free sample, etc.) please consult with area sales office.
- We will ship leaded relays as long as the leaded relay inventory exists.

Note: Cadmium was exempted from RoHS on October 21, 2005. (Amendment to Directive 2002/95/EC)

### 2. Recommended Lead Free Solder Profile

- Recommended solder paste Sn-3.0Ag-0.5Cu.

#### Reflow Solder condition

**Flow Solder condition:**

Pre-heating: maximum 120°C  
Soldering: dip within 5 sec. at  
260°C solder bath

**Solder by Soldering Iron:**

Soldering Iron  
Temperature: maximum 360°C  
Duration: maximum 3 sec.

**We highly recommend that you confirm your actual solder conditions**

### 3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays.

### 4. Tin Whisker

- Dipped SnAgCu solder is known as low risk tin whisker. No considerable length whisker was found by our in house test.

## Fujitsu Components International Headquarter Offices

### Japan

Fujitsu Component Limited  
Gotanda-Chuo Building  
3-5, Higashigotanda 2-chome, Shinagawa-ku  
Tokyo 141, Japan  
Tel: (81-3) 5449-7010  
Fax: (81-3) 5449-2626  
Email: [promothq@ft.ed.fujitsu.com](mailto:promothq@ft.ed.fujitsu.com)  
Web: [www.fcl.fujitsu.com](http://www.fcl.fujitsu.com)

### North and South America

Fujitsu Components America, Inc.  
250 E. Caribbean Drive  
Sunnyvale, CA 94089 U.S.A.  
Tel: (1-408) 745-4900  
Fax: (1-408) 745-4970  
Email: [components@us.fujitsu.com](mailto:components@us.fujitsu.com)  
Web: <http://www.fujitsu.com/us/services/edevices/components/>

### Europe

Fujitsu Components Europe B.V.  
Diamantlaan 25  
2132 WV Hoofddorp  
Netherlands  
Tel: (31-23) 5560910  
Fax: (31-23) 5560950  
Email: [info@fceu.fujitsu.com](mailto:info@fceu.fujitsu.com)  
Web: [emea.fujitsu.com/components/](http://emea.fujitsu.com/components/)

### Asia Pacific

Fujitsu Components Asia Ltd.  
102E Pasir Panjang Road  
#01-01 Citilink Warehouse Complex  
Singapore 118529  
Tel: (65) 6375-8560  
Fax: (65) 6273-3021  
Email: [fcal@fcal.fujitsu.com](mailto:fcal@fcal.fujitsu.com)  
Web: <http://www.fujitsu.com/sg/services/micro/components/>

©2008 Fujitsu Components America, Inc. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

Fujitsu Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice.  
Rev. January 18, 2008.