

(TLP795G)


TELECOMMUNICATION
DATA ACQUISITION
MEASUREMENT INSTRUMENTATION

The TOSHIBA TLP795G consists of an aluminum gallium arsenide infrared emitting diode optically coupled to a photo-MOS FET in a six lead plastic DIP package.

The TLP795G is a bi-directional switch which can replace mechanical relays in many applications.


- Peak Off-State Voltage : 400V (MIN.)
- Trigger LED Current : 5mA (MAX.)
- On-State Current : 150mA (MAX.) (A Connection)
- On-State Resistance : 12Ω (MAX.) (A Connection)
- Isolation Thickness : 0.4mm (MIN.)
- Isolation Voltage : 5000Vrms (MIN.)

Unit in mm

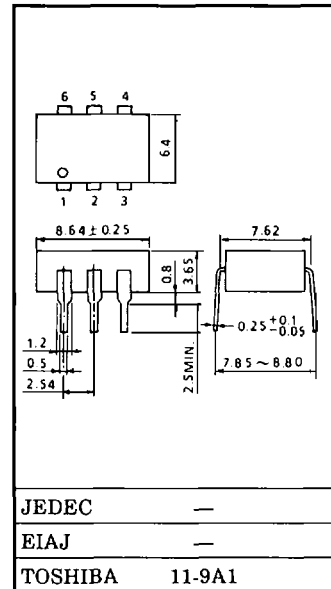


Weight : 0.49g

PIN CONFIGURATION (TOP VIEW)



- 1 : ANODE
- 2 : CATHODE
- 3 : NC
- 4 : DRAIN D1
- 5 : SOURCE
- 6 : DRAIN D2

SCHEMATIC



(TLP795G)

MAXIMUM RATINGS (Ta = 25°C)


CHARACTERISTIC			SYMBOL	RATING	UNIT
LED	Forward Current		I _F	30	mA
	Forward Current Derating (Ta≥25°C)		ΔI _F /°C	−0.3	mA/°C
	Peak Forward Current(100μs pulse, 100pps)		I _{FP}	1	A
	Reverse Voltage		V _R	5	V
	Junction Temperature		T _j	125	°C
DETECTOR	Off-State Output Terminal Voltage		V _{OFF}	400	V
	On-State RMS Current	A Connection	I _{ON}	150	mA
		B Connection		200	
		C Connection		300	
	On-State Current Derating (Ta≥25°C)	A Connection	ΔI _{ON} /°C	−1.5	mA/°C
		B Connection		−2.0	
		C Connection		−3.0	
	Junction Temperature		T _j	125	°C
Storage Temperature Range		T _{stg}	−55~100	°C	
Operating Temperature Range		T _{opr}	−20~85	°C	
Lead Soldering Temperature (10sec.)		T _{sol}	260	°C	
Isolation Voltage (AC, 1 min., R.H.≤60%)		(Note 1) BV _S	5000	Vrms	

Note 1 : Device considered a two-terminal device : Pins 1, 2 and 3 shorted together, and Pins 4, 5 and 6 shorted together.

RECOMMENDED OPERATING CONDITIONS

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT
Supply Voltage	V_{DD}	—	—	320	V
Forward Current	I_F	10	15	20	mA
On-State Current	I_{ON}	—	—	150	mA
Operating Temperature	T_{opr}	-20	—	80	°C

CIRCUIT CONNECTIONS

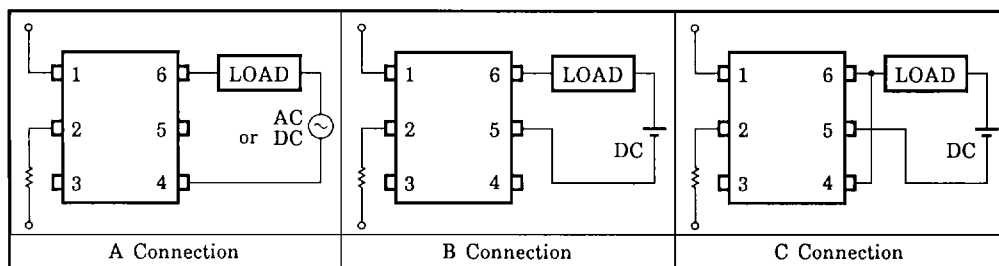

(TLP795G)

INDIVIDUAL ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
LED	Forward Voltage	V_F	$I_F = 10\text{mA}$	1.2	1.4	1.7	V
	Reverse Current	I_R	$V_R = 3\text{V}$	—	—	10	μA
	Capacitance	C_T	$V = 0, f = 1\text{MHz}$	—	15	—	pF
DETECTOR	Off-State Current	I_{OFF}	$V_{OFF} = 400\text{V}$	—	—	1	μA
	Capacitance	C_{OFF}	$V = 0, f = 1\text{MHz}$	—	—	—	pF

COUPLED ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Trigger LED Current		I_{FT}	$I_{ON} = 150\text{mA}$	—	—	5	mA
On-State Resistance	A Connection	R_{ON}	$I_{ON} = 150\text{mA}, I_F = 10\text{mA}$	—	8	12	Ω
	B Connection		$I_{ON} = 200\text{mA}, I_F = 10\text{mA}$	—	4	6	
	C Connection		$I_{ON} = 300\text{mA}, I_F = 10\text{mA}$	—	2	3	



ISOLATION CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Capacitance Input to Output	C_S	$V_S = 0, f = 1\text{MHz}$	—	0.8	—	pF
Isolation Resistance	R_S	$V_S = 500\text{V}, \text{R.H.} \leq 60\%$	5×10^{10}	10^{14}	—	Ω
Isolation Voltage	BV_S	AC, 1 minute	5000	—	—	V_{rms}
		AC, 1 second (in oil)	—	10000	—	
		DC, 1 minute (in oil)	—	10000	—	V_{DC}






SWITCHING CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Turn-on Time	t_{ON}	$V_{DD} = 20\text{V}, R_L = 200\Omega$	—	0.3	1.0	ms
Turn-off Time	t_{OFF}	$I_F = 10\text{mA}$ (Note 2)	—	0.2	1.0	






Note 2 : SWITCHING TIME TEST CIRCUIT

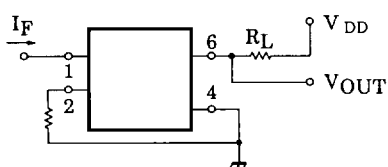

(TLP795G)

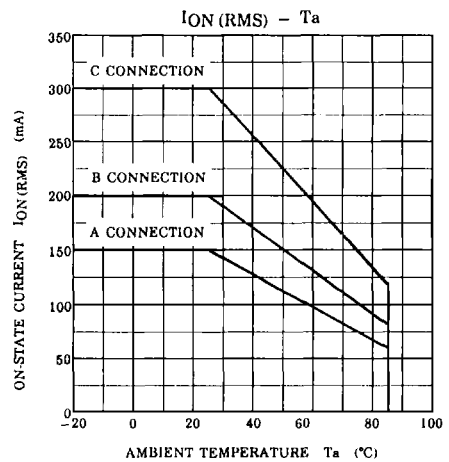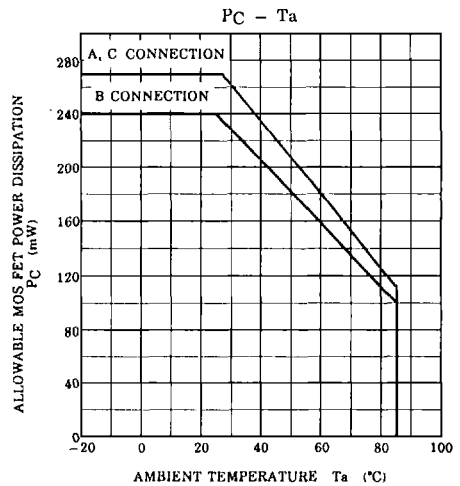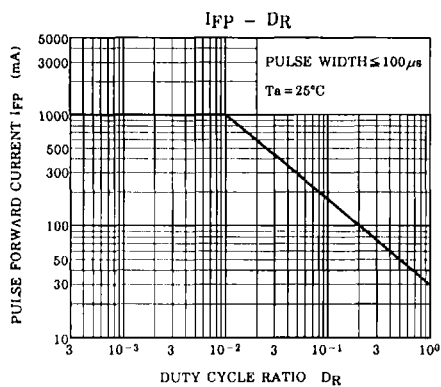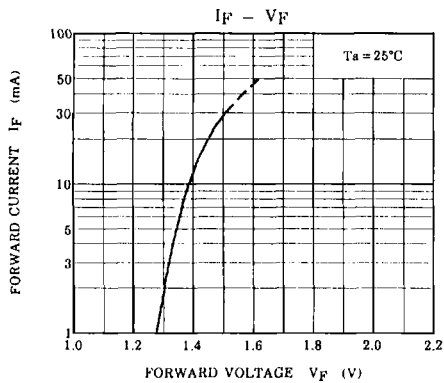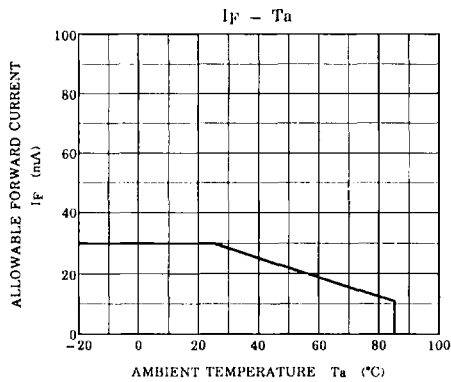

(TLP795G)

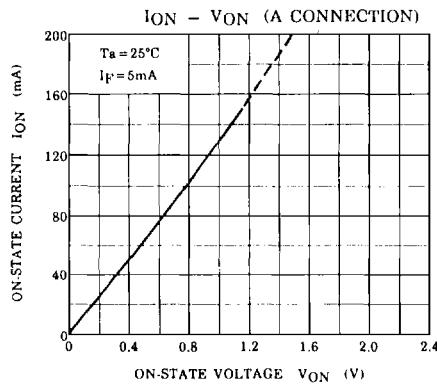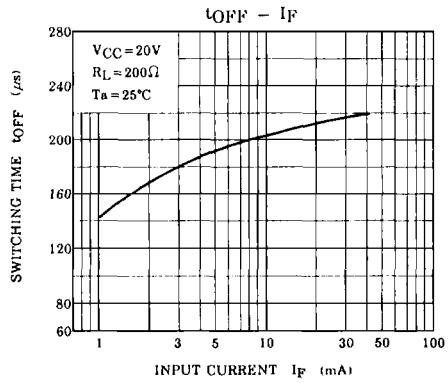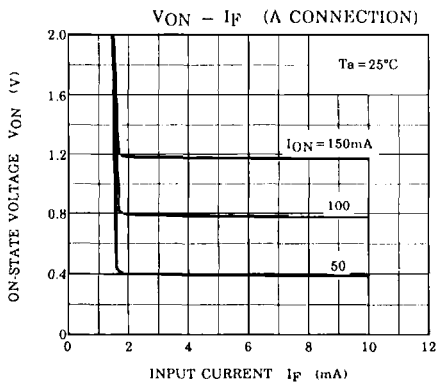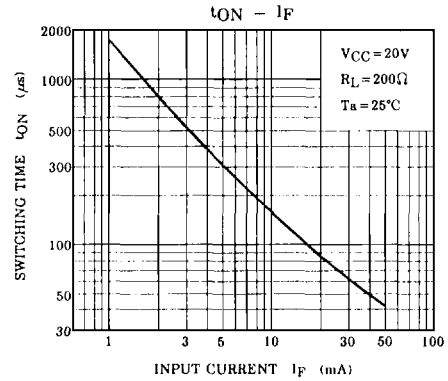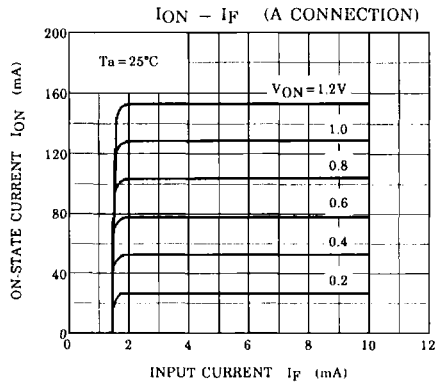

(TLP795G)

