




Surface
SMT
Mount

BOARD STACKER TW SERIES

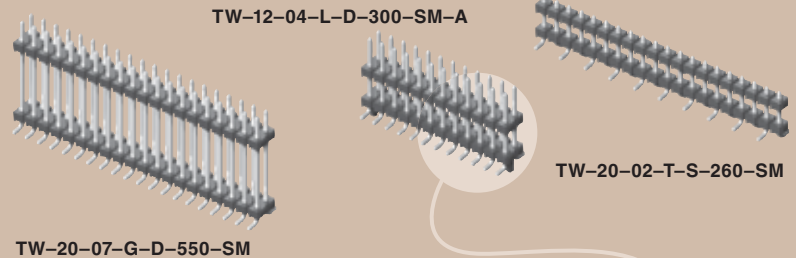

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com/TW

Insulator Material:

Black Liquid
Crystal Polymer

Terminal Material:

Phosphor Bronze

Plating:

Sn or Au over 50µ" (1,27µm) Ni

Current Rating:

3A @ 80°C ambient

Operating Temp Range:

-55°C to +105°C with Tin;

-55°C to +125°C with Gold

RoHS Compliant:

Yes

Processing:

Max Processing Temp:

230°C for 60 seconds, or

260°C for 20 seconds 3x

Lead-Free Solderable:

Yes

SMT Lead Coplanarity:



(0,15mm) .006" max



Mates with:
CLT, SQT, SQW, ESQT,
TLE SMM, MMS, TCSD

APPLICATION SPECIFIC OPTIONS

End shrouds with or without guide posts available. Call Samtec for stacker height ranges and standard part numbers on double row.

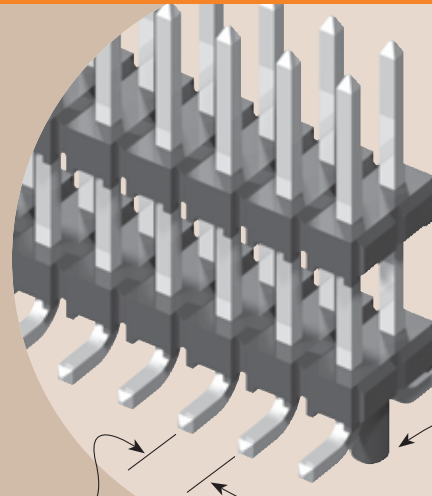

(2,00mm)
.0787" pitch

Available with optional Pick & Place Pads

Available with optional Alignment Pins or Locking Clips

TW	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	STACKER HEIGHT	SM	OTHER OPTIONS
02 thru 36		Specify LEAD STYLE from chart below.	—L = 10µ" (0,25µm) Gold post, Matte Tin on tail —G = 20µ" (0,51µm) Gold post, Gold flash on tail —T = Matte Tin	—S = Single Row —D = Double Row	—“XXX” = Stacker Height In inches (0,13mm) .005" increments Example: —250 = (6,35mm) .250"		—“XXX” = Polarized Position —A = Alignment Pin (Metal or plastic at Samtec discretion) (4,83mm) .190" min. board space (—D only) —P = Pick & Place Pad (1,91mm) .075" min. post height (04-36 only) —TR = Tape & Reel Packaging (—07 lead style not available) (—06 lead style with —P option not available as a standard)

Note: Other Gold plating options available. Contact Samtec.

Note: This Series is non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 • Fax: 812-948-5047
 SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0 • Fax: +49 (0) 89 / 89460-299
 SAMTEC NORDIC/BALTIC • Tel: +46-84477280 • Fax: +46-87420413
 SAMTEC ASIA PACIFIC • Tel: 65 6745-5955 • Fax: 65 6841-1502
 SAMTEC HONG KONG • Tel: 852-26904858 • Fax: 852-26904842
 SAMTEC SILICON VALLEY • Tel: 408-395-5900 • Fax: 408-395-1520
 SAMTEC FRANCE • Tel: 33 01 60 95 06 60 • Fax: 33 01 60 95 06 61
 SAMTEC ISRAEL • Tel: 972-3-7526600 • Fax: 972-3-7526690
 SAMTEC CHINA • Tel: 86-21-61103766 • Fax: 86-21-5423 4575
 SAMTEC SOUTH AFRICA • Tel: 27 11 452 8112 • Fax: 27 86 6714432
 SAMTEC UK • Tel: 44 01236 739292 • Fax: 44 01236 727113
 SAMTEC ITALY • Tel: 39 039 6890337 • Fax: 39 039 6890315
 SAMTEC INDIA • Tel: +91-80-3272 1612 • Fax: +91-80-4152 8187
 SAMTEC TAIWAN • Tel: 886-2-2735-6109 • Fax: 886-2-2735-5036
 SAMTEC ANZ • Tel: 613 9512 7747 • Fax: 613 9512 7745