


1. TERMINALS TO BE SHEARED TO MEET DIMENSION SPECIFICATION.
2. PARTS MAY BE CUT TO POSITION.
3. MINIMUM PUSHOUT FORCE: .5 LB.
4. NOTE DELETED
5. EJ OPTION IS NOT AVAILABLE AS OF REVISION AG.
APPLICABLE VIEWS ARE REMAINING FOR REFERENCE TO BUILD INTERNAL ASP ORDERS ONLY. THIS OPTION WAS FOR EXISTING BUSINESS ONLY. ANY EXISTING CUSTOMERS WILL HAVE PART NUMBERS SETUP AS INTERNAL ASP'S.
6. .003" [.08"] MAX BURR ALLOWANCE
7. MAX CUT FLASH: .010 [.25]

FTSH-1XX-XX-XXX-D-XX-XX
SHEET 1 OF 3

ANGLE
 $\pm 1^\circ$

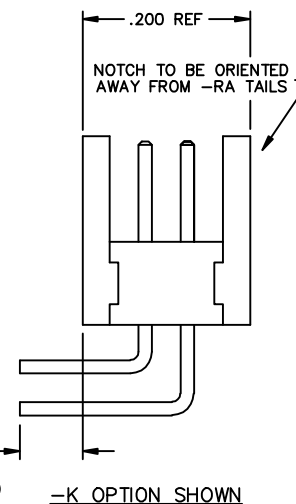

TAIL OPTION	PIN #1	PIN #2
-RA	T-1S15-64-XX	T-1S15-63-XX
-RA-K	T-1S15-64-XX	T-1S15-68-XX
-FC	T-1S15-07-XX	T-1S15-08-XX
-FE	T-1S15-03-XX	T-1S15-03-XX

MATERIAL:
INSULATOR:
BLACK LIQUID CRYSTAL POLYMER,
30% GLASS FILLED
TERMINAL:
PHOSPHOR BRONZE, ALLOY
NO. 510, GRADE A, FED. SPEC.
QQ-B-750, SPRING TEMPER



520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150
PHONE (812) 944-6733 P.O. BOX 1147
CODE 55322

MADE BY: BRATCHER 8-17-95

FTSH-1XX-XX-XXX-D-XX-XX