

SEALED PANEL MOUNT RPBT, RPCT SERIES


Mates with:
RCT

SPECIFICATIONS

For complete specifications see www.samtec.com?RPBT

Insulator Material: Black Liquid Crystal Polymer
Terminal: Phosphor Bronze
Seal: Silicone
Nut: Steel
Lock Washer: Steel

APPLICATION

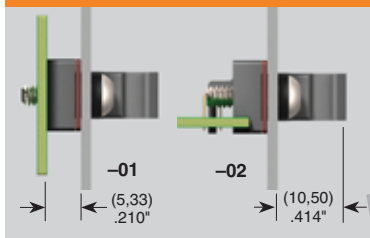

RPBT	NO. OF POSITIONS	LEAD STYLE	PLATING	ROW
	-10, -15, -20 (Per Row)	-01 = Through-hole -02 = Right Angle	-H = 30µ" (0,76µm) Gold	-D = Double Row

NO. OF POSITIONS	A	B	C
-10	(40,39) 1.590	(31,24) 1.230	(23,11) .910
-15	(46,74) 1.840	(37,59) 1.480	(29,46) 1.160
-20	(53,09) 2.090	(43,94) 1.730	(35,81) 1.410

Mates with:
RCT, FTM, TFC, SFM, SFC

SPECIFICATIONS

For complete specifications see www.samtec.com?RPCT

Insulator Material: Black Liquid Crystal Polymer
Terminal: Phosphor Bronze
Cable Insulator: PVC
Wire: Tin Copper
Seal: Silicone
Nut: Steel
Latch: Phosphor Bronze

RPCT	NO. OF POSITIONS	PLATING	D	WIRE LENGTH	END OPTION
	-10, -15, -20 (Per Row)	-H = 30µ" (0,76µm) Gold		-0.25 = (0.25m) 9.84" -0.50 = (0.50m) 19.69"	-BC = Blunt Cut -D = Double End -DR = Double Latch -TR = Transfer End

NO. OF POSITIONS	A	B	C
-10	(40,39) 1.590	(31,24) 1.230	(15,37) .605
-15	(46,74) 1.840	(37,59) 1.480	(21,72) .855
-20	(53,09) 2.090	(43,94) 1.730	(28,07) 1.105



Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM